



Rapport final

IEA-SHC Task 52 „Solar Heat and Energy economics“

Participation et Direction de la Sous-tâche B



Task 52
Solar Heat and Energy Economics
in Urban Environments



Date : 18.12.2017

Lieu : Ecublens

Mandant :

Office fédéral de l'énergie OFEN
L'Office fédéral de l'énergie OFEN
Programme Chaleur solaire et stockage de la chaleur
CH-3003 Berne
www.ofen.admin.ch

Mandataires :

Société Sorane SA
Ch. des Saugettes 1
Case postale 248
CH-1024 Ecublens
www.sorane.ch

Auteurs :

Paul Bourdoukan, Sorane SA, paul.bourdoukan@sorane.ch
Martin Joly, Sorane SA, martin.joly@sorane.ch

Responsable de domaine de l'OFEN : Andreas Eckmanns, andreas.eckmanns@bfe.admin.ch

Chef de programme de l'OFEN : Elimar Frank, Elimar.frank@frank-energy.com

Numéro du contrat de l'OFEN : SI/500999-01

Les auteurs sont seuls responsables du contenu et des conclusions de ce rapport.

Office fédéral de l'énergie OFEN

Mühlestrasse 4, 3063 Ittigen, Adresse postale : 3003 Berne
Tél. +41 58 462 56 11 · fax +41 58 463 25 00 · contact@bfe.admin.ch · www.ofen.admin.ch



Résumé

Le rayonnement solaire incident est une ressource énergétique disponible, renouvelable et abondante. Son utilisation en milieu urbain, où une part importante de l'énergie est consommée, offre un potentiel intéressant pour le remplacement des sources d'énergie conventionnelles. Bien qu'étudié et optimisé depuis de nombreuses années, le déploiement de l'énergie solaire thermique reste limité. Le groupe de travail de la Task 52 du programme SHC de l'IEA s'est penché sur différentes questions clefs : quels sont les possibilités techniques de sa mise en œuvre et comment encourager son déploiement ? Quel est la place de l'énergie solaire thermique dans le mix énergétique à l'horizon 2050 ?

Ce rapport décrit les actions réalisées au sein du groupe de travail pour apporter des éléments de réponse à la première question. Les principaux points étudiés sont le développement d'une méthodologie d'aide à la décision pour le choix d'un concept énergétique et l'analyse de cas existants qui intègrent une part importante d'énergie solaire. Le secteur considéré est celui du logement pour des concepts faisant appel, ou non, à des réseaux de chauffage à distance. La méthodologie présente l'intérêt de conduire rapidement son utilisateur dans la présélection d'un concept énergétique. Les indicateurs déterminants de ce concept sont ensuite quantifiés. Il s'agit notamment de l'estimation de la fraction solaire potentielle, la dimension des éléments de stockage, saisonnier ou non, ou encore le prix de l'énergie. En complément de cette méthodologie, un document décrivant des concepts énergétiques de cas exemplaires est proposé. Ce document décrit non seulement les aspects technico-économiques des projets mais également les différentes étapes, outils ou éléments clefs qui ont conduit à l'aboutissement de ces projets de référence.

Les éléments développés dans ce travail nous montrent que l'énergie solaire est une option techniquement réalisable et économiquement viable pour une large gamme de projets. Cette option mérite donc d'être considérée et la méthodologie développée permet de fournir des éléments de réponse utiles pour le développement de projets faisant appel à l'énergie solaire thermique.



Sommaire

Résumé 3

Sommaire	4
Liste des abréviations.....	5
1 Contexte de départ	6
2 But du projet.....	6
3 Fondements, conditions-cadre.....	6
4 Procédure / méthodologie.....	7
5 Résultats	7
5.1 Outils et besoins des utilisateurs	7
5.2 Méthodologie pour l'aide à l'intégration de l'énergie solaire en milieu urbain	8
5.3 Etude de projets existants intégrant l'énergie solaire thermique dans leur concept	9
6 Discussion / évaluation des résultats / enseignements	10
6.1 Discussion de la méthodologie	10
6.2 Discussion des études de cas	10
6.3 Dissémination des résultats	11
7 Conclusions et Perspectives, étapes ultérieures (à l'issue du projet)	11
8 Annexes	12
8.1 URBAN ENERGY CONCEPT Solar district heating – Methodology and tools, M. Joly et al. 2017	
8.2 TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask B – Part B3 F. Mauthner, M. Joly and P. Bourdoukan, 2017	



Liste des abréviations

IEA	International Energy Agency
SHC	Solar Heating and Cooling Programme



1 Contexte de départ

L'utilisation de l'énergie solaire thermique en milieu urbain est un moyen prometteur pour contribuer au mixte énergétique urbain futur. Ce potentiel est intéressant puisqu'une part importante de l'énergie est consommée dans les villes notamment pour la production d'eau chaude sanitaire ou pour le chauffage des espaces intérieurs. D'autre part, l'énergie solaire incidente est libre d'accès, renouvelable et abondante. La question de son intégration et de son rôle futur mérite donc d'être posée.

Dans le cadre de son programme « Solar Heating & Cooling », l'Agence International pour l'Energie (IEA) a mis en place la Task 52 intitulée « Solar Heat and Energy economics ». Autour de cette tâche, différents instituts et entreprises mettent en commun leurs ressources humaines et leurs compétences afin d'avancer sur la compréhension de la thématique. Dans ce cadre, l'entreprise Sorane SA a coordonnée la sous-tache B dans un consortium plus large décrit ci-après.

La participation helvétique à cette tâche est importante puisqu'elle implique trois organismes :

- Le Centre de Recherches Energétiques et Municipales (CREM) actif sur le terrain pour le développement de concepts énergétiques à l'échelle territoriale
- La société Berner Kraftwerke (BKW) qui représente un acteur important dans le paysage énergétique Suisse
- L'entreprise Sorane SA spécialisée dans la rationalisation énergétique de l'échelle du bâtiment à celle d'un quartier

2 But du projet

Ce projet porte sur l'analyse du rôle futur de l'énergie solaire thermique dans les systèmes d'approvisionnement en énergie en milieu urbain. Grâce à une analyse économique qui reflète l'évolution future des systèmes énergétiques (100% renouvelable à l'horizon 2050) des stratégies et des outils sont développés pour étudier la pertinence de l'intégration solaire à l'échelle urbaine. Des exemples d'intégration des capteurs solaires dans un environnement urbain sont développés et documentés.

3 Fondements, conditions-cadre

La tâche est coordonnée par Sebastian Herkel du Fraunhofer Institut de Freiburg en Allemagne. Elle est subdivisée en trois sous-tâches dont les objectifs propres sont discutés par l'ensemble des acteurs impliqués dans le projet. Les trois sous tâches sont les suivantes:

- Sous tâche A coordonnée par l'Université d'Aalborg au Danemark – Scénarios énergétiques
- Sous tâche B coordonnée par Sorane SA en Suisse – Méthodologie, outils et cas d'étude pour les concepts énergétiques urbains
- Sous tâche C coordonnée par l'Institut AEE INTEC à Gleisdorf en Autriche – Technologie et démonstrateurs

Le travail est organisé autour de réunions d'experts qui ont eu lieu tous les six mois. Ce rythme a permis au groupe d'avancer sur les objectifs prévus dans la demande.

Pour la sous tâche B, les personnes activement impliquées et leur organisation sont les suivantes :

- Paul Bourdoukan (Sorane, CH)
- Martin Joly (Sorane, CH)
- Martin Andersen (SERC, SE)
- Chris Bale (SERC, SE)
- Daniel Trier (PlanEnergi, DK)
- Simon Stenbo Sørensen (PlanEnergi, DK)
- Gabriel Ruiz (CREM, CH)
- Christine Weber (BKW, CH)
- Sebastian Herkel (ISE, DE)
- Jan-Bleicke Eggers (ISE, DE)
- Franz Mauthner (AEE, AT)

4 Procédure / méthodologie

Ce rapport relate le travail effectué dans le cadre de la sous-tâche B, travaux coordonnés par Sorane SA. Les informations et le travail effectué proviennent des différents membres de la tâche et de leur réseau de connaissances. Afin de répondre à certaines questions spécifiques, des sondages d'opinion ont également été effectués.

Pour atteindre les objectifs de la sous-tâche B, les points suivants ont été traités:

- Outils à disposition pour le calcul et la compréhension de flux énergétiques en milieu urbain
- Développement d'une méthodologie d'aide à l'intégration de systèmes énergétiques faisant appel à l'énergie solaire
- Etude de projets existants intégrant l'énergie solaire thermique dans leur concept

Ces points sont développés dans les sections qui suivent. Ils visent à développer une méthodologie pour l'aide à l'intégration de l'énergie solaire dans des projets de construction ou de rénovation de système énergétique. Cette méthodologie est accompagnée d'études de cas concrets qui permettent d'apporter des ordres de grandeurs, concepts ou contacts spécialisés au lecteur. Elle est particulièrement adaptée à l'aide à la décision pour les stades d'avant-projet de construction ou de rénovation de logements.

5 Résultats

5.1 Outils et besoins des utilisateurs

La première étape du travail a été d'établir deux sondages. Le premier vise à comprendre et lister les besoins des acteurs impliqués dans le développement des concepts énergétiques. Le second vise à créer un répertoire d'outils de simulation des flux énergétiques connus et maîtrisés par les membres de la Task 52. Ce répertoire liste les propriétés spécifiques de chaque outil. Ces deux démarches font l'objet de rapports annexés au rapport méthodologie¹. Ces rapports sont à la base de la réflexion pour l'élaboration de la méthodologie décrite dans la section qui suit.

¹ URBAN ENERGY CONCEPT Solar district heating – Methodology and tools, M. Joly et al.

5.2 Méthodologie pour l'aide à l'intégration de l'énergie solaire en milieu urbain

Le cœur de la méthodologie repose sur quatre étapes distinctes schématisées dans la figure qui suit. Ces étapes sont les suivantes :

- Définition des contraintes du projet
- Pré-sélection d'un concept énergétique
- Quantification d'indicateurs propres au projet
- Répétition de la quantification ou modification du concept énergétique

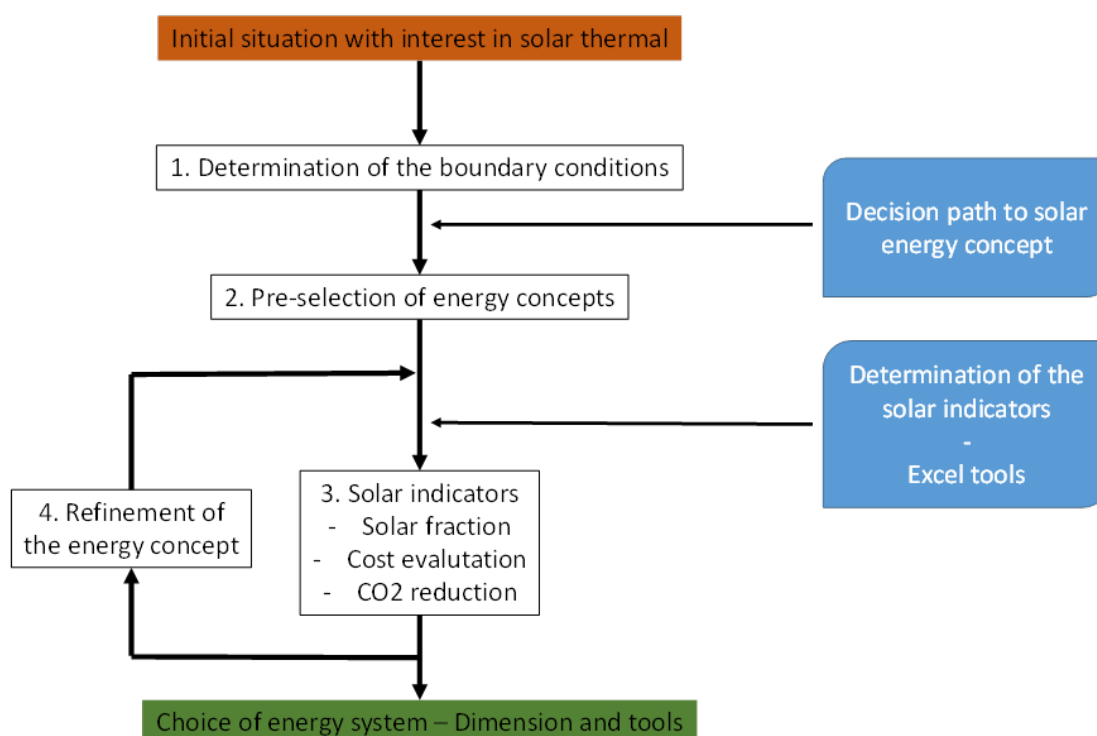


Figure 1 : Représentation schématique de la méthodologie.

Ces étapes, accompagnées de différentes tables et outils, permettent d'orienter les preneurs de décision dans leur réflexion. Elles permettent dans un premier temps de relier les contraintes initiales d'un projet à un concept énergétique. Ces concepts énergétiques, qui incluent une production solaire, varient d'un système simple pour une maison unifamiliale à des systèmes plus ambitieux pour la couverture des besoins en chaleur d'un quartier ou d'une ville. Une fois le concept prédéfini, un outil de type Excel permet de quantifier l'impact de la mise en œuvre d'une installation solaire. Les indicateurs ainsi calculés offrent la possibilité de comparer différentes variantes ou différents concepts énergétiques. Il s'agit notamment du calcul du coût de l'installation solaire, de la fraction de l'énergie couverte par de l'énergie solaire ou encore du prix de l'énergie produite à partir du soleil. A noter que cette démarche inclue la quantification de systèmes énergétiques faisant appel à un stockage saisonnier. Une partie des données utilisées pour la quantification des indicateurs solaires ont été collectées dans le cadre de la Task 52.

Cette méthodologie et les outils qui l'accompagnent sont décrits dans le livrable *URBAN ENERGY CONCEPT Solar district heating – Methodology and tools*, M. Joly et al. 2017. Le document, fourni en

annexe de ce document n'est pas définitif. Une version définitive sera validée avant le second trimestre 2018 et transmise à l'OFEN pour mise à jour du présent rapport.

5.3 Etude de projets existants intégrant l'énergie solaire thermique dans leur concept

Sur la base des participants à la Task 52 et de leur réseau, une série de bons exemples de concept énergétique faisant appel à l'énergie solaire thermique a été sélectionnée. Ces exemples se situent en Autriche (1), Allemagne (1), Danemark (2), Suède (1) et Suisse (4 dont 2 sous la forme de projet). Pour ces différents cas, le but recherché est, d'une part, de détailler les concepts énergétiques en fournissant notamment au lecteur les principes de production, les dimensions des principaux composants et les différentes grandeurs liées aux flux financiers (investissement, subvention, coûts et prix de vente). D'autre part, un effort important a été fourni pour détailler les différentes étapes précédant le choix du concept énergétique ainsi que les différents outils utilisés pour y parvenir. Ce travail a été coordonné en collaboration avec F. Mauthner de la sous-tâche C.

Les informations recueillies pour l'ensemble de ces bons exemples ont été regroupé dans un livrable intitulé TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask B – Part B3 F. Mauthner, M. Joly and P. Bourdoukan, 2017.



Figure 2 : Répartition géographique des cas étudiés.

6 Discussion / évaluation des résultats / enseignements

6.1 Discussion de la méthodologie

Les sections qui précèdent décrivent une méthodologie efficace d'aide à l'intégration de l'énergie solaire dans des concepts énergétique en milieu urbain. Cette dernière présente la qualité de la simplicité d'application. Ceci la rend utile comme outil pour guider la réflexion de preneurs de décision à un stade préliminaire de projet de construction ou de rénovation. Elle ne fournit toutefois que peu d'éléments pour le dimensionnement de système au moment de la construction. Pour cette phase, des outils spécifiques doivent être utilisés.

Son élaboration avec les différents partenaires du projet ont montré la grande difficulté de converger vers une démarche qui regroupe les différentes problématiques dans un champ de contraintes très large. Effectivement, le choix d'un concept n'est pas uniquement lié, par exemple, à l'ensoleillement ou au type de consommateur. La considération de contraintes autres telles que les contraintes politiques, environnementales ou financières engendrent des impacts très importants sur le choix de concept retenu. La méthodologie développée dans ce projet résulte au final d'une pondération de ces différents paramètres.

6.2 Discussion des études de cas

Le document produit par ce travail fourni aux personnes intéressées par des concepts intégrant l'énergie solaire thermique une quantité d'information importante, de haute précision et de qualité. Ceci pour des concepts énergétiques variés dans différents pays où les contraintes locales ont permis le développement de concepts novateurs.

L'analyse de ces cas nous a également permis d'en tirer différents enseignements énumérés dans les points qui suivent :

- Pour les cas étudiés, la motivation de mettre en œuvre un système énergétique faisant appel à l'énergie solaire thermique est présente initialement dans le projet. Cette motivation est parfois insuffisante pour aboutir à un système énergétique faisant appel à une technologie de type solaire thermique. Effectivement, lorsqu'un concept à haute fraction renouvelable est visé, l'énergie solaire thermique entre en compétition directe avec d'autres sources renouvelables telles que le bois ou l'énergie solaire photovoltaïque.
- La fraction d'énergie pouvant être couverte par de l'énergie solaire peut être très importante (25-40%) et ceci sans même recourir à un stockage saisonnier. L'utilisation d'un stockage saisonnier peut permettre d'augmenter encore cette fraction (65%).
- Les modes d'intégration de l'énergie solaire sont très variés. Les exemples présentés montrent des couplages différents en termes d'injection, stockage ou production de l'énergie.
- Les exemples étudiés montrent que la rentabilité économique est généralement suffisante. Le choix d'investir dans la mise en œuvre d'installation solaire thermique est donc bénéfique sur la durée de vie des installations. Cet investissement est toutefois généralement plus élevé que celui nécessaire à la mise en œuvre de systèmes de production dit conventionnels.

6.3 Dissémination des résultats

En cours de projets, nous pouvons relever les actions suivantes :

- IEA Networking event Switzerland, 25.09.2015, Fribourg, Suisse
- CISBAT Conference – Présentation oral – 06.09.2017, EPFL, Lausanne, Suisse
- A methodology to integrate solar thermal energy in district heating networks confronted with a Swedish real case study, M. Joly et al., Energy Procedia (2017) pp. 865-870 DOI information: 10.1016/j.egypro.2017.07.451
- IEA SHC Solar Academy Webinar -- Energy Economy and Solar Heat – Perspectives and Best Practice, 14.12.2017

7 Conclusions et Perspectives, étapes ultérieures (à l'issue du projet)

Le travail réalisé dans ce projet montre que l'intégration de l'énergie solaire thermique en milieu urbain peut être réalisée de manière extrêmement variée. Son intégration doit toutefois être réfléchie au cas par cas en fonction, par exemple, des besoins de l'utilisateur ou des autres sources d'énergie à disposition. Les cas existants étudiés montrent qu'une fraction importante de l'énergie peut être produite par le biais du rayonnement solaire incident. Pour ces cas, la rentabilité économique est généralement démontrée si l'on bénéficie d'une capacité financière suffisante à l'investissement.

La mise en œuvre de tels systèmes intégrant l'énergie solaire thermique est donc une option intéressante pour le remplacement d'une partie des combustibles fossiles. La méthodologie proposée dans ce travail permet d'introduire cette option dès les premières étapes de la planification de projets. Les grandeurs indiquées et calculées dans les différents documents se basent en grande partie sur des installations construites dans des pays de l'union européenne. L'interprétation ou l'extrapolation de ces grandeurs pour la Suisse n'est pas forcément triviale. Dans la continuité de ce travail, il serait intéressant d'exploiter le travail réalisé dans cette tâche en adaptant certaines données au contexte politico-économique propre à la Suisse.

Les différents exemples montrent que la capacité d'investissement est un paramètre important. Une réflexion sur les différents bras de levier possibles pour l'encouragement de déploiement de cette technologie pourrait être pertinente notamment dans le cas de chauffage à distance urbain.



8 Annexes

8.1 URBAN ENERGY CONCEPT Solar district heating – Methodology and tools, M. Joly et al. 2017



Urban energy concept

Solar district heating

Methodology and tools

Technical Report of IEA SHC Task 52, subtask B -
Methodologies, Tools and Case studies for Urban Energy concepts

Authors: Martin Joly (Sorane, CH), Paul Bourdoukan (Sorane, CH), Jan-Bleicke Eggers (ISE, DE), Martin Andersen (SERC, SE), Chris Bales (SERC, SE), Gabriel Ruiz (CREM, CH), Daniel Trier (Planenergi, DK), Christine Weber (BKW, CH), Sebastian Herkel (ISE, DE)

Sorane SA
Chemin des Saugettes 1
1024 Ecublens
Switzerland

Ecublens, 29st March 2016
Review: 20st February 2018

IEA Solar Heating and Cooling Programme (IEA SHC)

The Solar Heating and Cooling Technology Collaboration Programme was founded in 1977 as one of the first multilateral technology initiatives ("Implementing Agreements") of the International Energy Agency. Its mission is "to enhance collective knowledge and application of solar heating and cooling through international collaboration to reach the goal set in the vision of solar thermal energy meeting 50% of low temperature heating and cooling demand by 2050.

The members of the IEA SHC collaborate on projects (referred to as "Tasks") in the field of research, development, demonstration (RD&D), and test methods for solar thermal energy and solar buildings.

A total of 61 projects have been initiated, 53 of which have been completed. Research topics include:

- Solar Space Heating and Water Heating (Tasks 14, 19, 26, 44, 54)
- Solar Cooling (Tasks 25, 38, 48, 53)
- Solar Heat or Industrial or Agricultural Processes (Tasks 29, 33, 49)
- Solar District Heating (Tasks 7, 45, 55)
- Solar Buildings/Architecture/Urban Planning (Tasks 8, 11, 12, 13, 20, 22, 23, 28, 37, 40, 41, 47, 51, 52, 56, 59)
- Solar Thermal & PV (Tasks 16, 35, 60)
- Daylighting/Lighting (Tasks 21, 31, 50, 61)
- Materials/Components for Solar Heating and Cooling (Tasks 2, 3, 6, 10, 18, 27, 39)
- Standards, Certification, and Test Methods (Tasks 14, 24, 34, 43, 57)
- Resource Assessment (Tasks 1, 4, 5, 9, 17, 36, 46)
- Storage of Solar Heat (Tasks 7, 32, 42, 58)

In addition to the project work, there are special activities:

- SHC International Conference on Solar Heating and Cooling for Buildings and Industry
- Solar Heat Worldwide – annual statistics publication
- Memorandum of Understanding – working agreement with solar thermal trade organizations
- Workshops and seminars

Country Members

Australia	France	Spain
Austria	Germany	Sweden
Belgium	Italy	Switzerland
Canada	Mexico	Turkey
China	Netherlands	Portugal
Denmark	Norway	United Kingdom
European Commission	Slovakia	South Africa

Sponsor Members

European Copper Institute

International Solar Energy Society - ISES

ECREEE

RCREEE

Gulf Organization for Research and Development

For more information on the IEA SHC work, including many free publications, please visit www.iea-shc.org

The contents of this report do not necessarily reflect the viewpoints or policies of the International Energy Agency (IEA) or its member countries, the IEA Solar Heating and Cooling Technology Collaboration Programme (SHC TCP) members or the participating researchers.

Introduction.....	5
1 Existing tools and urban actors needs.....	5
1.1 Existing tools.....	5
1.1.1 Tools survey.....	6
1.2 Assessment of the needs of urban actors	7
1.2.1 Goal.....	7
1.2.2 Approach	7
1.2.3 Results analysis.....	8
1.2.4 Analysis	11
1.2.5 Identification of needs.....	11
2 Development of a methodology to meet the needs of urban actors	12
2.1 Indicators and boundary conditions.....	14
2.2 Decision path – from boundary conditions to the solar energy systems.....	16
2.2.1 Boundary conditions.....	16
2.2.2 Questions allowing to progress in the tree	16
2.2.3 Classification according to given energy system.....	17
2.3 Evaluation of solar indicators	18
2.3.1 Input	18
2.3.2 Output	19
2.3.3 Assumptions	19
2.4 Evaluation of solar indicators	22
3 Conclusion	25
4 Glossary	26
5 Annexes	30
5.1 Decision path.....	30
5.2 Tools description	32
5.2.1 Tools for energy balancing	33
5.2.2 Tools for thermal, electrical or hydraulic simulations.....	38
5.2.3 Tools for optimization	43
5.2.4 Others : GIS, tool frameworks, co-simulation platforms.....	45
5.2.5 Time resolution.....	48

Introduction

The task 52 of the IEA solar heating and cooling program investigates the future role of solar thermal in urban energy system. This report summaries the different achievements of the subtask B focused on Methodologies, Tools and Case studies for Urban Energy concepts. In the first chapter, we will present the preliminary studies made on existing tools and on the assessment of the needs of urban actors. These studies were used as a base to build a new methodology. In the second chapter, we present a methodology to guide stakeholders in their different choices when projecting a solar district heating in urban environment. The case studies analysis is presented in a separated report¹.

1 Existing tools and urban actors needs

1.1 Existing tools

Nowadays a lot of tools and model exist to simulate energy flux. For example, they are useful to estimate the annual solar gains, the building heat demand, the behaviour of complex transient system or the annual cost or the optimisation of national energy system. This domain was already studied and many publications are present in the literature. In 2006, S. Jebaraj² already made a reviewing of various emerging issues related to the energy modelling. Based on this work, D. Connolly³ and B. Crawley⁴ published quite exhaustive review of existing simulation programs. In these papers, authors were aware that no ideal energy tool exists. However, these reviews were useful to provide information necessary to select the suitable energy tool.

More recently, researchers worked on complex system such as entire urban district composed of buildings, plants and storages. This coupled building, plant and heat simulation is necessary to solve the problem of time and space dependant situation. In his work, Huber et al.⁵ shows that such complex system overstress a current standard simulation tool. In order to overpass this problem, he develop a specific tool using co-simulation. This approach was also applied by D. Thomas⁶ who used this method to improve the accuracy of both Design Performance Viewer (DPV) and the CitySim urban simulation engine.

¹ TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask B – Part B3, F. Mauthner, M. Joly and P. Bourdoukan, 2017

² Jebaraj, S. & Iniyar, S. A review of energy models. *Renew. Sustain. Energy Rev.* 10, 281–311 (2006).

³ Connolly, D., Lund, H., Mathiesen, B. V. & Leahy, M. A review of computer tools for analysing the integration of renewable energy into various energy systems. *Appl. Energy* 87, 1059–1082 (2010).

⁴ Crawley, D. B., Hand, J. W., Kummert, M. & Griffith, B. T. Contrasting the capabilities of building energy performance simulation programs. *Build. Environ.* 43, 661–673 (2008).

⁵ Huber, J. & Nytsch-Geusen, C. Development of Modeling and Simulation Strategies for Large-Scale Urban Districts. *Proc. Build. Simul.* 14–16 (2011).

⁶ Thomas, D., Miller, C., Kämpf, J. & Schlueter, A multiscale co-simulation of EnergyPlus and CitySim models derived from a building information model. 469–476 (2012).

With regard to this literature, this report presents the survey made in the scope of the subtask B. This survey focuses on the description of the tools mastered by the task members.

1.1.1 Tools survey

It was decided to submit a questionnaire for the tool survey. This survey was sent to task members who were responsible to reply to the questions and propose slight improvements. In the survey, the following points were addressed:

- Tool name
- Developer
- Small description (what does the tool simulate/evaluate)
- Input (description of the input type/file)
- Output (description of the output)
- Space resolution
- Time resolution
- Demand side (does it simulate the demand side)
- Supply side (does it simulate the supply side)
- Information exchange (inter operability /exchange with other software possible?)
- Is the output of the tool sufficient for the dimensioning
- What kind of meteo data it requires
- If it simulates the supply side what are the information needed on the supply side
- If it simulates the demand side what are the information needed on the demand side
- Does it allow economic analysis
- Type of license (Open source | Commercial | Academic)
- Application (Design | Analysis | Simulation | Evaluation)

The main objectives of this survey are the following:

- Description of available simulation and design tools integrating solar thermal modelling
- Space and time resolution of each tool
- Integration of variability and types of energy resources
- Existing and potential chain tools

After the surveys were returned by the task members, the data were used to generate tables and graphs reported as an annex of this document. This graphical representation provides a quick and concise overview of each tool and allows an efficient representation of potential tool chain.

In this survey, 12 tools were investigated (with respective developers):

- PlanETer	CREM
- MEU	CREM
- CitySim	LESO-EPFL
- B-Sol	HES-SO
- Smart Heat Design	CREM - LESO-EPFL - HES-SO
- INVERT/EE-Lab	TU Vienna, Energy Economics Group
- Trnsys 17.1	University of Wisconsin, TESS, Transsolar
- SIMPLEX	Pink GmbH, Österreich
- EnergyPLAN	Aalborg University, Denmark
- EnergyPRO	Aalborg University, Denmark
- REMOD-D	Fraunhofer ISE
- KomMod	Fraunhofer ISE
- GenOpt 3.1.0	Lawrence Berkely National Laboratory
- TRNOPT 2.1.54	TRNOPT: University of Wisconsin, TESS

The description of many other energy system analysis models can be freely consulted online⁷.

1.2 Assessment of the needs of urban actors⁸

1.2.1 Goal

The intention of the present assessment (activity B1-A) is to identify to which question(s)/expectations the developed methodology (B1-B) should answer - and consequently which of the tools (B2-A) would be the most adequate to address the identified needs.

To do so, first the urban actors will be identified (municipalities, planners...) and their needs will be assessed, respectively.

1.2.2 Approach

In order to structure the collection of information, a matrix has been created differentiating the type of actors and the scale of concern. The urban actors are sorted by groups of interest as follows:

- Local and regulatory authorities
 - Municipality
 - Energy governance/policies
- Utilities
 - Thermal energy providers
 - Power energy providers

⁷ <http://www.energyplan.eu/othertools/>

⁸ Assessment of the needs of urban actors - Author: G. Ruiz, CREM Martigny, July 2015

- o Water / wastewater companies
- Private companies
 - o Engineering offices
 - o Urban planners
 - o Equipment suppliers/ installers
- Academic
 - o Universities
 - o Research groups
- Citizens
 - o Household's owners
 - o Household's tenant
- Customers
- Communication / Media

Each of these actors can interact at different territorial boundaries or sphere of influence. These scales of concern are categorised as follows (bottom-up wise):

- Apartment
- Building
- Cluster/District
- City
- Region
- Country

This matrix questionnaire has been then shared to the expert’s team asking them to fill it out with their experience with regard to the needs for integrating solar thermal in urban context. Furthermore, each input to this questionnaire starts with a “context” followed by a “need”. An example is given in the figure here below.

Subtask B-1 A Needs of urban actors		Building
Private companies		
Engineering offices	- Context: designing a solar system - Need: which state of the art guidelines and sizing rules to be fostered in designing a solar system for private household ?	- C - M gu fo fo

Figure 1 : Example of an urban actor’s need captured from the Task 52 Team

1.2.3 Results analysis

A synthesis of the results is here proposed, sorted by actor groups. Furthermore, it is here proposed to summarize the outcomes by topics of concern rather than keeping a territorial scale as reference (although these details are available in the table).

1.2.3.1 Local and regulatory authorities

- Technical: Guidance for determining the solar potential and appropriate locations where to install a solar system.
- Guidance for determining the best solar concepts (centralized or not, penetration rate ...) to be applied and under which technical, financial, urban pattern and architectural conditions.
- Economic: Determine which technical concepts / systems size and locations are economically viable, or, under which conditions (legislation, market, subsidies ...) these become profitable.
- Legislation: Clear directions / policies fostering an adequate use of solar heat systems, in a coherent way through the different territorial scales and in consideration to the other energy resources (gas, wood ...).
- Politics: Define to which extent the solar thermal will contribute attain the energy objectives.
- Create the required framework (economy, legislation...) to facilitate the implementation of solar thermal energy.

1.2.3.2 Utilities

- Technical: Need for tools determining the best solar concepts (centralized or not, penetration rate ...) to be applied and under which technical, financial, urban pattern and architectural conditions.
- Economic: Help defining profitable business models supporting the implementation of solar heat systems according to the urban characteristics (new or old quarter...).
- Create new business around the model of (solar-) heat as a service, allowing producing solar heat even if not own consumed.

1.2.3.3 Private companies

- Technical: Need for tools & guidelines designing the best solar concepts (centralized or not, sizing, solar fraction ...) to be applied and under which technical, financial, urban pattern and architectural conditions.
- Define which technical concept will contribute best to the meet the political objectives or one's client objective.
- Economic: Compare profitability of different systems integrating solar energy (PV+Heat pump VS. Solar thermal; contribution of solar thermal energy when coupled to a district heating network ...)
- Legislation: Define to which extent should architectural constraints and urban planning policies be adapted in order to facilitate the integration of solar thermal systems.
- Politics: Awareness of the political community should be raised towards solar lobbying, given the appropriate and clear scientific guidelines available.

1.2.3.4 Academic

- Technical: Development of tools & guidelines defining the best solar concepts (centralized or not, sizing, solar fraction ...) to be applied and under which technical, financial, urban pattern and architectural conditions
- Knowledge sharing about solar solutions with actors concerned by concrete applications (at all levels). Need to integrate energy and sustainable developments aspects in urban/architectural education programs.
- Economic: Development of models showing adequacy between technical solutions and economy benefits.

1.2.3.5 Citizens

- Technical: Guidance for determining the solar potential at one's level and the technical concept to be promoted given financial and architectural conditions.
- Economic: Guidance on the financial benefits for solar systems with regard to the recommended technical concept and pre-requisite conditions.
- Politics: Create the required framework (economy, legislation...) to facilitate the implementation of solar thermal energy (given that solar is not always economically/spatially feasible on household level).

1.2.3.6 Customers

- Technical: Guidance on the solar technology (solar thermal vs. PV) and solar integration concepts to be promoted, given its lifetime and profitability.
- Propose simplified and robust systems facilitating its installation and minimizing the operating costs.
- Economic: Propose heat prices, including or not solar energy.
- Legislation: Offer the possibility to buy solar heat as service, even if no own system is feasible.

1.2.3.7 Communication / Media

- Technical: Contribute to find opportunities for academic institutions to develop and implement innovative solutions by facilitating collaborations with different stakeholders.
- Economic: Create ethical & economic value around lodging (apartment, houses, hotels ...) that are using renewable energy like solar.
- Politics: Propose dedicated information campaigns supported by the medias to foster the implementation of the solar integration.

1.2.4 Analysis

Two main streams can be derived from this exercise: a scientific/technical aspect and influencing factors.

1.2.4.1 Scientific/technical aspects

Independently from the actor's type, almost all topics related to a technical / scientific aspect are concerned by the key question: "Which solar concept should be promoted, depending on the application scale?"

There is an obvious need to provide concept design guidelines at each scale. And these should furthermore be justified based on consideration like: technical implementation complexity, coherence with the urban plan, architectural constraints, economic benefit, energy savings and climate impact.

However, these considerations can be influenced by mean of less objective arguments than the scientific approach; the latter enabling to justify with energy and climate indicators the use of a system rather than another. These influencing arguments are discussed hereafter.

1.2.4.2 Influencing factors

It appears also clear from this survey that any scientifically sound guidance won't be effective without addressing major influencing factors. These factors have the capability to make a technology happen or not, in a given economy and social context.

To summarize, the main ones are:

- Politics: from which it is possible to obtain incentive and support, at all scales. But political support needs to rely on facts, coming back to drawing consistent scientific guidelines.
- Legislation: which can be changed if not adequate, given the required political support and awareness of the different stakeholders (citizens, equipment suppliers, academic community ...)
- Economic the cost of equipment can be influenced depending on the technology to be promoted and the market interest. O&M costs can also become more or less attractive according to the evolution of conventional energy prices. Energy prices are again subject to the influence of political will that can counter-balance to some extent the macro economy levers.

1.2.5 Identification of needs

How should the research efforts towards the integration of solar heat be driven? One approach is to firstly define from a scientific point of view which systems to promote, under certain conditions, and then to think about the adequate economical, legislation and political levers that should be activated to make it happen. An alternative approach is to start from the actual existing frameworks and try to fit into it the most adequate solutions in terms of energy-climate-cost considerations.

One thing may be sure, the energy transition won't happen without adapting somehow the actual frameworks, on a political, legislative or economical level. And from the needs of urban actors, we identified that expectations towards all these topics prime on technical questions. A way to meet these identified needs is the development of the methodology described in the next chapter.

2 Development of a methodology to meet the needs of urban actors

Since the addition of a solar thermal system in a district heating usually increases the cost of energy, it is necessary to highlight its many advantages. The final solution might not necessarily be the most economically profitable, but will contribute to the increase of renewable energy use.

In order to guide stakeholders in the elaboration of their energy concept, a methodological approach was developed. The graphical representation of the process is represented on the Figure 1 with the main following steps:

1. Project owner is either obliged or interested to elaborate an energy concept with a solar or renewable fraction in the energy mix. In order to pre-determine a solar concept, the initial constraints have to be determined. These constraints vary a lot from a project to another depending on, for instance, of the country legislation, the type of needs or the owner's financial capacity. A quite exhaustive list of indicators is shown in this report to include all possible constraints. These indicators are classified in three groups related to the framework, the boundary conditions and the energy system design.
2. Based on the initial constraints of the concept, a decision path was elaborated to guide the stakeholder in the pre-selection of an energy system. The decision path links the initial constraints, the available area for solar panel and main energy system classification developed in the subtask C.
3. Using the output of the decision path, an Excel-tool was elaborated to calculate solar indicators. Based on heated floor area and available space for solar panels, some relevant indicators can be calculated at early stage of the project. The tool can provide valuable estimation of the solar fraction, cost evaluation of the solar system or gains in the CO₂ emissions.
4. During this process, new solutions more efficient or more specific to the situation can be highlighted. The initial energy concept can be refined and a new run for the determination of the solar indicators can be achieved.

The following section will develop these steps and present the tools and tables developed during this task.

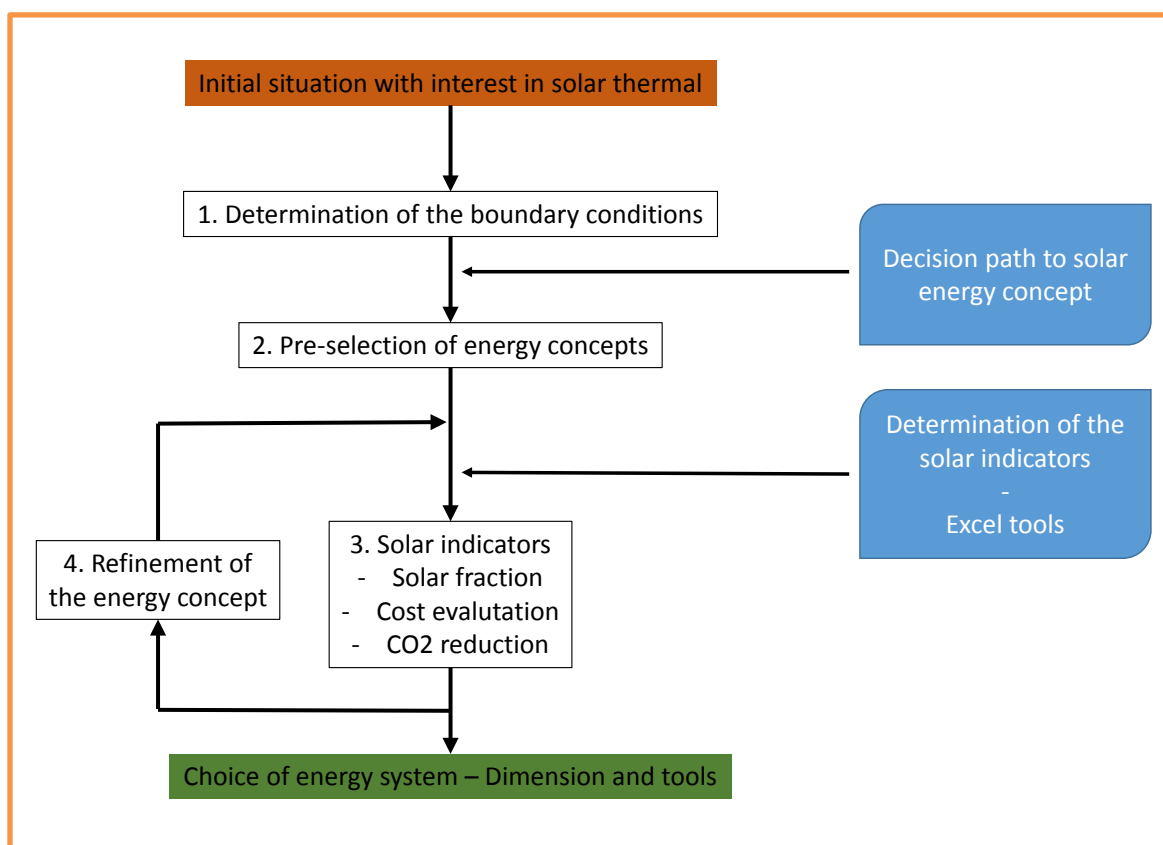


Figure 2 : Methodological approach: from boundary conditions to indicator energy system comparison.

2.1 Indicators and boundary conditions

In order to make assumptions on the more adapted energy system it is of first importance to have an overview of the parameters that constraint the system. In our methodology, these parameters, called indicators, are organized in three different categories. The relevancy of each of those indicators can differ from a project to another. The table gives quite an exhaustive amount of parameters that can influence latter decision. It is therefore important to go through every categories.

The first category proposed in the table includes framework indicators. These indicators outlines the societal structures relevant to the energy system. While this first list contains not quantitative parameters, they are of first importance. The boundary indicators category provides indications of solar thermal applicability within a specific area in relation to the existing context. The last category includes design indicators of solar thermal applicability in a specific case. All indicators provided in the table are compiled and described in the following table.

Level	Indicator	Explanation for inclusion
Political level	Framework indicators (structural)	Indications of solar thermal applicability within specific administrative borders e.g. country, region or municipality
	Subsidies (direct or indirect)	Can support a positive business case for solar thermal solutions
	Legislation (promoting solar thermal)	Can promote relevance/necessity of choosing solar thermal solutions
	Credit capability (financing options)	Can minimize economic risk for investors to choose solar thermal solutions
	Access to knowledge (experiences from comparable areas/professionals)	Can provide instant attention to critical conditions for implementing solar thermal solutions
	Project owner (nature of project owner)	Can change the constraints and obligation on the project
	National or international commitment	Can promote some type of project or disadvantage others as a function of the national or international targets
Regional/local level	Boundary indicators (contextual)	Indications of solar thermal applicability within specific area in relation to existing context
	Area population	Suitable scale (based on experience)
	Heat density	Critical mass, making sure there is a demand for the (solar thermal) heat production
	Heated building floor area	Critical mass, making sure there is a demand for the (solar thermal) heat production
	Assignment	Contribute to the calculation of the needs on the demand size
	Current heat price (savings per MWh)	Benchmarking cost-competitiveness of solar thermal

	Existing dominant heat supply	Suitable technology (based on experience)
	Irradiance density	Estimation of solar thermal production
	Spatial availability	Size of suitable area available
	Spatial value	Cost allocation for land acquisition
	Distance to connect supply and demand (from ST plant to DH net)	Cost allocation for transmission pipes
Implementation level	Design indicators (specific)	Indications of solar thermal applicability in a specific case
	Heat consumption per time step (e.g. monthly or winter period & summer period)	Analysing heat demand in relation to fluctuating heat production
	Supply temperature levels (demand side)	Dimensioning technical solution to heat demand
	Size of collector area	Dimensioning heat production to heat demand
	Solar collector types	Optimization of energy production
	Surface slope and orientation	Optimization of energy production
	Cost of solar collectors	Calculating business case (feasibility)
	Solar fraction targeted for domestic hot water and space heating	Contribute to the calculation of parameters on the demand size
	Cost of pipe laying	Calculating business case (feasibility)
	Space for storage (possibility of constructing heat storage)	Dimensioning storage capacity taking the heat demand into account
	Storage types	Optimization of energy production/heat losses and feasibility
	Cost of storage	Calculating business case (feasibility)

2.2 Decision path – from boundary conditions to the solar energy systems

This section describes the decision path elaborated in the frame of the task. The aim of this path is to provide an initial view of the energy concept. The structure of the path described in this report is presented in the annexes. This path works as a cross-linked decision tree.

The main elements of this path are the following:

- Boundary conditions
- Questions allowing to progress in the tree
- Classification according to a given energy system

These elements are described in flowing sections.

2.2.1 Boundary conditions

The boundary conditions can be determined with the indicators listed in the previous section. The basic idea is to provide a qualitative initial assessment of the main parameters of the project. The following indicators can be highlighted:

- Allocation and purpose of the heated surface. This question is linked to a central problematic of the temperature of the district heating.
- Availability of local resources
- Owner objectives in term of envelop performance, renewable fraction, or quality certification.
- Legal constrains in term of envelop performance, renewable fraction for electric or heat consumption or architectural constraints.
- New or existing district heating system

2.2.2 Questions allowing to progress in the tree

In order to progress in the decision tree, questions have to be answered. The following questions are addressed:

- Is there an existing district heating next to the area of the project?
- At a first glance, is the heat density of the network reasonably high?
- What is the temperature and the power available in the existing district heating?
- Are there some subsidies available for connecting to or creating a district heating?
- Does the connection to a district heating reach all the legislative requirements? For example in term of renewable fraction of energy?
- Is a seasonal storage possible?
- What is the available space for solar energy systems?

These questions can lead to various options in the energy concept. The solutions are multiple with or without solar, connected or not connected to district heating network. An interesting output of this decision path is to offer a link between these options and a classification of typical solar energy systems. These classifications is described in the next section.

2.2.3 Classification according to given energy system

The decision path can make a link between initial constraints of the project and energy system proposals classified in five different types. These types are enumerated hereafter⁹:

- 1. Solar domestic hot water
- 2. Solar-combi systems in single family homes
- 3. Solar-combi systems in multi-family homes
- 4. Solar block heating
- 5. Solar district heating



Figure 3: Typical examples of various solar thermal systems. From left to right, Solar domestic hot water, Solar-combi systems in single family homes, Solar-combi systems in multi-family homes, Solar block heating, Solar district heating.

The identification of a potential solar thermal system is a crucial step in the determination of solar indicators. The comparison of the calculated values, based on boundary conditions and potential energy system can lead to essential decision in the project.

⁹ This classification is derived from the report "Classification and benchmarking of solar thermal systems in urban environments" of the subtask C

2.3 Evaluation of solar indicators

In order to estimate quantitatively the solar indicators, an Excel-tool was conceived. From basic data of the project, the tool can quantify the solar fraction, the energy cost or the CO₂ emission variation. The following sections will describe the tool:

- Requested inputs
- Outputs
- Assumptions

2.3.1 Input

To run this tool, the following basic information are needed:

- **Country.** The countries taken into account are Austria, Germany, France, Sweden and Switzerland. One of these countries has to be preselected.
- **Heated floor area [m²].** In order to estimate the consumption of the building, the heated floor surface has to be filled in. This value is defined as the complete heated floor area including the wall surface and the insulation of the building. Three kinds of consumer profiles can be distinguished:
 - o Single family house
 - o Multi Family house
 - o Apartment Block
- **Construction period.** For each consumer profile, the construction period of the building has to be specified. The available periods cover the year 1900 to 2010 with a time step of 10 years.
- **Refurbishment - Space heating gain [%].** If the building was refurbished since its construction, this parameter allows the user to apply a correction coefficient to the space heating value. This coefficient can be adjusted if only a part of the real estate was refurbished. The entered value can vary between 0% (no refurbishment) to 100% (no need any more for space heating). The energy allocated to domestic hot water is not affected by this parameter.
- **Collector total surface [m²].** The surface (gross area) that can be allocated for solar energy installations is indicated. This parameter is obviously linked to the solar fraction indicator.
- **Size index - 1 to 5.** The size index is a crucial parameter as the quantification of solar indicators is strongly dependent from the size of the installation. The determination of the class targeted in the project can be determined by using the decision path described in the section 3. The chosen index corresponds to the class described in the Figure 3. In this figure, an indication of the size of the solar field is shown.

Size index and classification of solar thermal energy system	Estimation of the size of the solar field [m ²]	
	Minimum	Maximum
1. Solar domestic hot water – DHW-SFH	0	10
2. Solar-combi systems in single family homes – CS-SFH	10	30
3. Solar-combi systems in multi-family homes – CS-MFH	30	300
4. Solar block heating – SBH	300	5'000
5. Solar district heating - SHD	5'000	200'000

Figure 4: Estimation of the size of the solar field as a function of the size index and classification.

- **Additional production source.** This parameter is linked to the saved emission of CO₂. As district heating network depends most of the time from more than one energy source, the additional energy vector is requested for the CO₂-tons emission calculation.
- **Renewable fraction of the heat network [%].** For the saved CO₂ emission as well, a part of the energy delivered by a heating network could be already renewable (waste burning, wood, energy recovery,...). This part won't be taken into account in the solar heat saved CO₂ emission.

2.3.2 Output

Using the inputs described in the preceding section, a quantification of solar indicators can be obtained. The outputs of the tool are the following:

- **Max solar fraction.** The maximum solar fraction quantifies the energy provided by solar energy radiation compared to total energy consumption needed for the space heating and domestic hot water. To target a solar fraction above 20%, the question of the storage has to be carefully treated. In such situation, the diurnal and seasonal storage space needs are indicated.
- **Diurnal storage.** In a situation where a diurnal storage is targeted, this parameter provides an estimation of the volume requested for the tank.
- **Seasonal storage.** In a situation where a seasonal storage is targeted (most of the time to target a high solar fraction), this parameter provides an estimation of the volume requested for the tank.
- **Heat density.** A crucial indicator to determine if a district heating is economically viable is the heat density of the network. This indicator is function of the energy delivered by the network and the length of the network itself. However, the economic viability of a heat varies a lot from a country to another. The output given in this tool is thus the length of the network to reach the mean heat density of the districts heating of a given country.
- **Specific solar thermal system cost [€/m²].** This parameter refers to the cost to end-user for ready-installed (turnkey) systems (absorbers and storage) excluding taxes or subsidies.
- **Energy cost [€/year] and [€/kWh].** This output represents the levelized cost for solar energy system in central Europe countries. Costs are given for diurnal or seasonal storages.
- **Saved CO₂ emission [ton-CO₂].** By using solar heat in an energy system instead of non-renewable resources, part of the CO₂ emissions can be avoided. This output quantifies how many tons of CO₂ can be avoided.

2.3.3 Assumptions

In order to quantify the indicators given in the previous section, some assumptions were applied. This section describes the methodology applied for:

- Needs quantification
- Solar production quantification
- Dimension of the solar thermal system and estimation of the cost
- Avoided emission quantification

- Quantification of the mean district length as a function of the nation heat density network distribution.

These points are described in the following subsections.

2.3.3.1 Needs quantification

The needs of the project are the addition of the needs for space heating and domestic hot water production. For domestic hot water, the Swiss norm SIA 380/1 values were applied. The following figure represents the values used for the calculation as a function of the type of consumers.

Type	Domestic hot water [kWh/m2]
Single family house	13.9
Multi Family house	20.8
Apartment Block	20.8

Figure 5: Specific energy needed for domestic hot water production.

For the space heating, values were taken from literature. Specific values were extracted from the TABULA WebTool¹⁰ database. This database has been developed within the framework of the Intelligent Energy Europe projects TABULA and EPISCOPE. For Swiss consumption, alternative literature sources were used¹¹ instead.

2.3.3.2 Solar production quantification

The solar production is calculated on a yearly basis by multiplying the available gross area by the solar yield. This parameter, taken from the benchmark of the STC¹² as a function of the energy system classification, is corrected by the global solar irradiation values onto optimally inclined collector surface $G_{0,incl}$ [kWh/(m².a)]¹³.

	$G_{0,incl}$ [kWh/(m ² .a)]
Austria - Wien	1300
France - Paris	1400
Germany - Berlin	1300
Sweden - Gothenburg	1330
Switzerland - Zurich	1420

Figure 6: global solar irradiation values for an optimally inclined collector surface

¹⁰ <http://webtool.building-typology.eu/>

¹¹ Groupe d'action combustibles Stratégie du groupe d'action objectifs sectoriels organisation

¹² Technology and Demonstrators - Technical Report Subtask C – Part C1, F. Mauthner and S. Herkel

¹³ <http://re.jrc.ec.europa.eu/pvgis/cmeps/eur.htm#CH>

2.3.3.3 Dimension of the solar thermal system and estimation of the cost

The values taken into account to dimension and quantify the cost are derived from the benchmark of the STC¹⁴. It is based on sets of best practice examples in operation from countries participating in IEA-SHC Task 52 (AT, DE, and DK). In sum, 46 systems were investigated.

The tool gives information to the user on the type of storage to apply, seasonal or diurnal. For small scale solar systems for domestic hot water or solar combi systems in single or multifamily homes, the seasonal storage is in most cases not interesting or profitable. In the tool, the values linked to seasonal storage are indicated when the two following parameters are checked:

- The global solar target for domestic hot water and space heating for the buildings exceeds 20%
- The solar energy system corresponds to Solar block heating or solar district heating types

2.3.3.4 Avoided emission quantification

The avoided emissions are derived from the following equation

$$\varepsilon = E_{sol}(1 - \rho) * \epsilon$$

Where

ε – Avoided emissions [CO₂-tons/year]

E_{sol} – Maximum solar energy production [KWh/year]

ρ – Existing renewable fraction of the district heating [-]

ϵ – Emission coefficient [CO₂-tons/kWh]

The emission coefficients are derived from the literature¹⁵ as a function of the energy vector.

2.3.3.5 Quantification of the mean district length as a function of the nation heat density network distribution.

To determine if a district heating is profitable or not, a criterion based on average district heating heat density of for a given country is developed in this study. The heat densities mean value of existing district heating in Austria, Germany, France, Sweden and Switzerland were found in literature¹⁶ (Figure 6). This parameter characterizes the total annual amount of energy delivered by the district heating divided by the total length of the network. As losses and the costs increase with this length, a district heating should maximize this parameter to optimize the profitability of the system.

By dividing the national mean heat density by the total energy needs, a pipe length can be determined. This value represents the national mean length of a district heating for a given annual amount of energy delivered. This value doesn't represent a threshold limit

¹⁴ Technology and Demonstrators - Technical Report Subtask C – Part C1, F. Mauthner and S. Herkel

¹⁵ Facteurs d'émission de CO₂ selon l'inventaire des gaz à effet de serre de la Suisse, OFEN, 2016

¹⁶ Euroheat & Power; 2011

for the economic viability of a project. But it provides a benchmark value for ongoing projects.

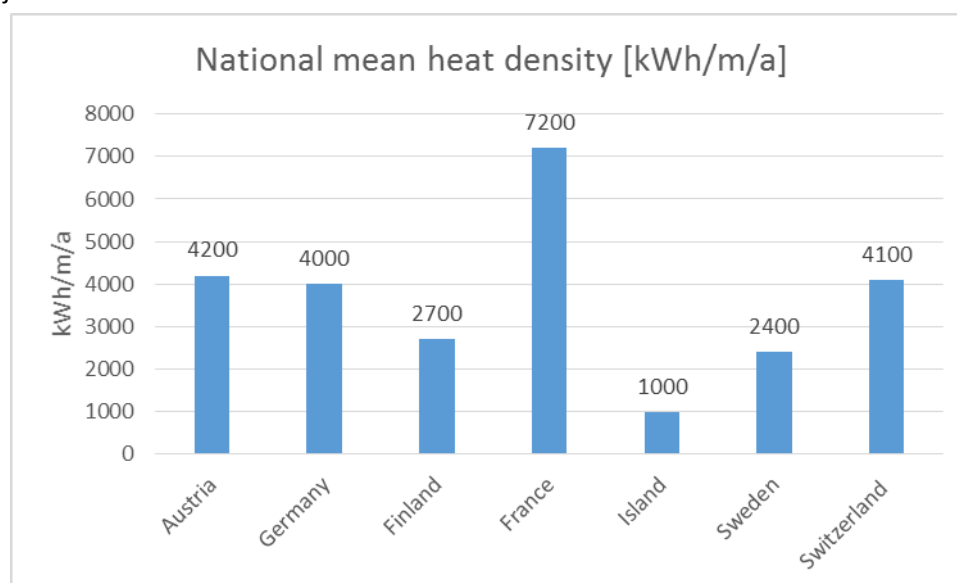


Figure 7 : Heat density mean values of district heating in Europa¹⁷.

2.4 Evaluation of solar indicators

The developed methodology with its decision path and excel calculation tool were challenged using the reported best practice example¹⁸. During an expert meeting, this decision path was tested with each participant responsible of a case study. The decision path could always lead to the same concept as the installed concept. This means its role to easily guide to a suitable energy system is achieved; it works effectively as a “go/no go” for concepts including the possibility of solar thermal. Even if quite basic, this decision path is pertinent, especially because it considers contextual and technical best practice aspects.

The use of the excel calculation tool gives good results even in terms of economic evaluation and solar fraction estimation (giving more credit to the quality of the benchmark realized in Subtasks C¹⁹). The following figures show the comparison of the values obtained from installed systems and the values obtained by applying the methodology and using the excel tool.

¹⁷ Euroheat & Power; 2011

¹⁸ TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask B – Part B3, F. Mauthner, M. Joly and P. Bourdoukan, 2017

¹⁹ TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask C – Part C1, F. Mauthner, S. Herkel, 2017

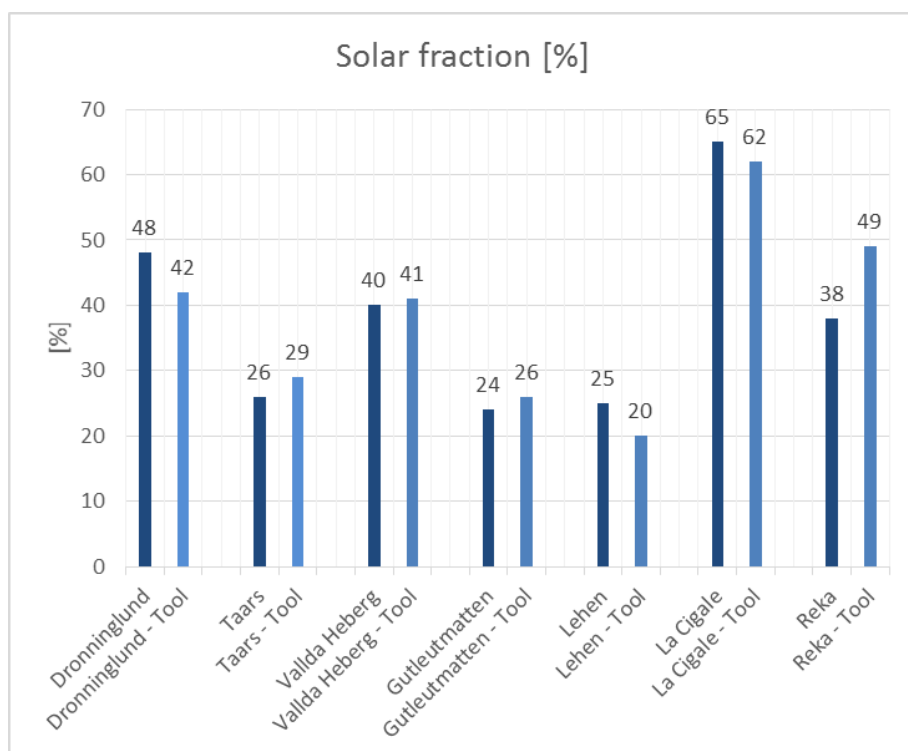


Figure 8 : Representation of measured and calculated solar fractions. Dark blue, the values obtained from installed systems. Light blue, the values obtained with the tool.

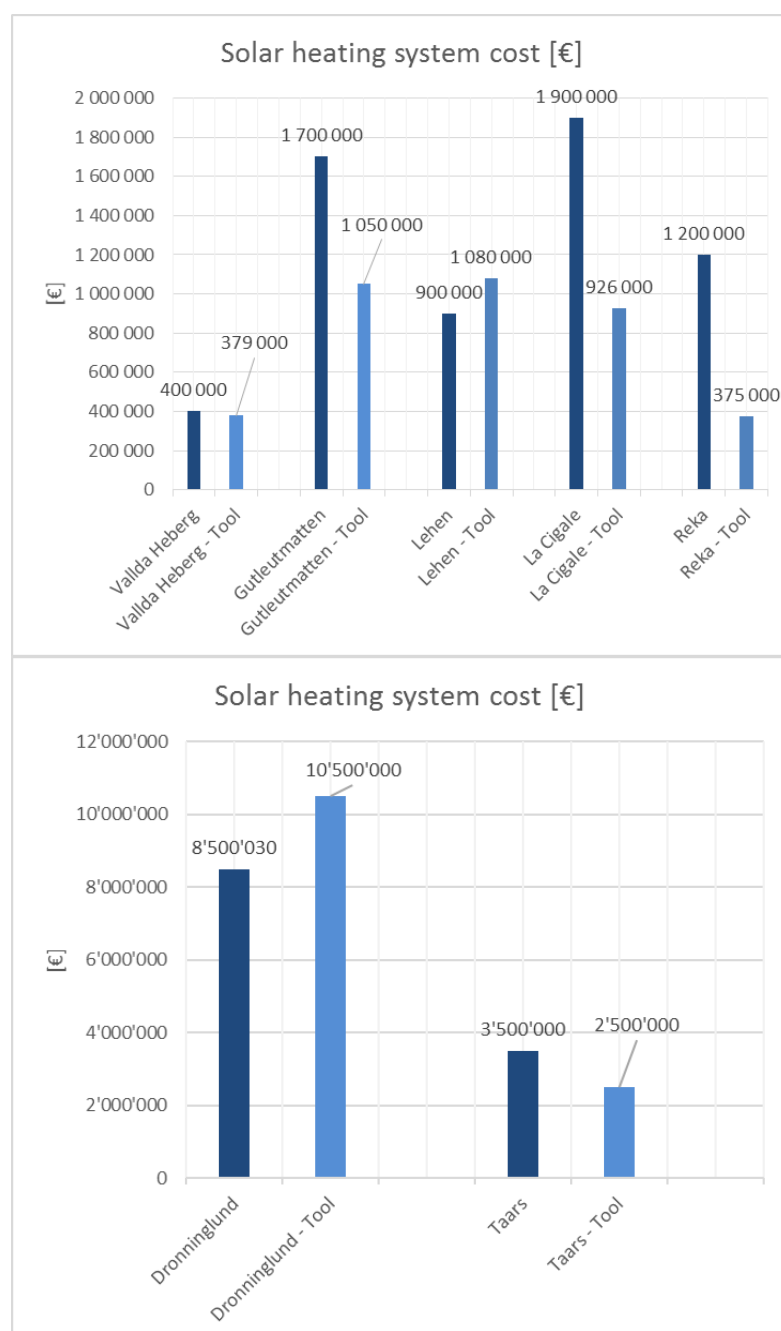


Figure 9 : Representation of measured and calculated solar heating system cost. Dark blue, the values obtained from installed systems. Light blue, the values obtained with the tool.

The values obtained with the tool are generally in good agreement with the measured values. Some of these reported cases benefitted from subsidies (for being pioneers in the retained solar assisted concept), thus twisting somehow the cost comparison. The results shown in the preceding figures are encouraging but don't bring a final proof of its accuracy. Nevertheless, these examples show that solar indicators and solar heating system cost can be roughly estimated by this method at a very early stage of a project. The strength of the method relies on the wide range of countries and solar energy system types that can be evaluated on the basis of only two surfaces estimations.

3 Conclusion

In conclusion, this work allowed the development of a methodology that provides the stakeholders a simple and efficient decision support for early stage energy system design, helping them to progress in the development of the energy concept of their projects. Based on a survey of existing solar energy systems and buildings consumptions, it integrates a tool that is able to quantify some crucial indicators. The main input parameters are the heated floor area, the solar thermal area and the building typology. The main indicators provided are the solar fraction, the annual solar energy yield and the solar heating system cost. The strength of the method relies on the wide range of countries and solar energy system types that can be evaluated with only a few inputs.

This methodology answers the lack of pre-selection solutions identified at the beginning of the IEA Task 52. Its role is not to promote solar thermal at any cost but guide the user towards best suitable system for a given project. We are convinced that if stakeholders can easily evaluate, from an early stage, the benefits of solar thermal, they are far more likely to integrate it in their final projects.

4 Glossary

Term	Abbreviation	Definition	Source
Best practice example		Collection of real examples that answer to a given question as a function of defined criteria	
Building Cooling Heating and Power	BCHP	Application of trigeneration in buildings	
Building typology		A building typology describes building types with the same set of parameters. It includes geographical distribution, age and other important building features related to the aims of the project	P.Schwer, R. Fischer
Case studies		Case studies is a research method which involves an in-depth, longitudinal examination of a single instance or event: a case. They provide a systematic way of looking at events, collecting data, analysing information, and reporting the results.	Wikipedia
Chain tool		the tools forming a toolchain are executed consecutively so the output of each tool becomes the input for the next one	Wikipedia
Cogeneration		Co-generation or Combined Heat and Power (CHP) is the simultaneous generation of both electricity and heat from the same fuel, for useful purposes.	IEA - Cogeneration and renewables - Solutions for a low-carbon future
Combined Heat and Power District Heating	CHPDH	Cogeneration based district heating	
Combined Heat Power	CHP	Co-generation or Combined Heat and Power (CHP) is the simultaneous generation of both electricity and heat from the same fuel, for useful purposes.	IEA - Cogeneration and renewables - Solutions for a low-carbon future

Cumulated Demand	Energy	CED	The CED describes the consumption of fossil, nuclear and renewable energy sources along the life cycle of a good or a service. This includes the direct uses as well as the indirect (grey) consumption of energy due to the use of materials (e.g. plastic or wood in construction), consumables necessary in manufacturing (e.g., solvents, gloves, packaging) and raw materials.	IEA - Methodology Guidelines on Life Cycle Assessment of Photovoltaic Electricity
Cumulated Demand	Exergy	CExD	CExD expresses the gross exergy of all natural resources, both renewable and non-renewable, required to deliver a product	Environmental indicators - R. H. Armon
District heating and cooling		DHC	Network able to deliver heating and cooling vectors	MJ
Heat network			District heating	
Energy balances			The considered system is at equilibrium, the energy entering in the equal to the energy going out	mj
Energy scenario			Energy scenarios provide a framework for exploring future energy perspectives, including various combinations of technology options and their implications.	Nebojsa Nakić cenović
Energy supply system			Description of a process able to deliver energy, from primary energy to useful energy	Robert N. Schock
Energy system			Description of a process, from primary energy to useful energy	Robert N. Schock
Geographic information system		GIS	is a system designed to capture, store, manipulate, analyse, manage, and present all types of spatial or geographical data.	Wikipedia
Heat density			Heat consumed in an urban area as a function of the surface	
Integration of solar thermal system			The architectural integration quality can be defined as the result of a controlled and coherent integration of the solar collectors simultaneously under all functional, constructive, and formal (aesthetic) points of view	Munari-Probst
International Energy Agency	Energy	IEA	The International Energy Agency is a autonomous intergovernmental organization established in the framework of the Organisation for Economic Co-operation and Development (OECD)	Wiki
Methodology			A body of practices, procedures, and rules used by those who work in a discipline	The free dictionary

Renewable energy		Renewable energy is generally defined as energy that comes from resources which are naturally replenished on a human timescale, such as sunlight, wind, rain, tides, waves, and geothermal heat	IPSOS 2011
Simulation tool		Software able to simulate real phenomenon with a mathematical model	
Solar Heating and Cooling programme	SHC	The Solar Heating and Cooling Programme (SHC) was established in 1977, one of the first programmes of the International Energy Agency, to promote the use of all aspects of solar thermal energy. The Programme's work is unique in that it is accomplished through the international collaborative effort of experts from member countries and the European Union.	IEA
Solar potential		Amount of energy potentially provided by the sun radiation	
Solar thermal energy	STE	Solar thermal energy (STE) is a form of energy and a technology for harnessing solar energy to generate thermal energy or electrical energy for use in industry, and in the residential and commercial sectors.	wiki
Solar thermal system		System with a solar collector able to convert radiative energy of the sun into heat	
Heat pump		Device that provides heat energy from a source of heat to a destination called a "heat sink".	
Urban area		An urban area is a location characterized by high human population density and vast human-built features in comparison to the areas surrounding it.	
Urban energy system		The combined processes of acquiring and using energy to satisfy the energy service demands of a given urban area	James Keirstead
Time resolution		Precision of a measurement or a simulation as a function of time	
Space resolution		Precision of a measurement or a simulation as a function of a distance or a surface	
Electrical grid		Interconnected network for delivering electricity from suppliers to consumers	wiki
Gas grid		Network of the gas distribution	

Micro-grid or smart-grid		Small-scale power grid that can operate independently or in conjunction with the area's main electrical grid.	WhatIs
Co-simulation		Modelling and simulation of different subsystems which form a coupled problem in a distributed manner	Wiki
Combined cooling, heat and power or trigeneration	CCHP	Process that refers to the simultaneous generation of electricity and useful heating and cooling from the combustion of a fuel or a solar heat collector.	wiki
Fuel		Refers to coal, biomass, natural gas, nuclear material, the sun or the heat stored in the earth.	IEA - Cogeneration and renewables - Solutions for a low-carbon future
Exergy		Exergy is the concept that explicitly indicates 'what is consumed'	Introduction to the Concept of Exergy - Masanori Shukuya & Abdelaziz Hammache

5 Annexes

5.1 Decision path

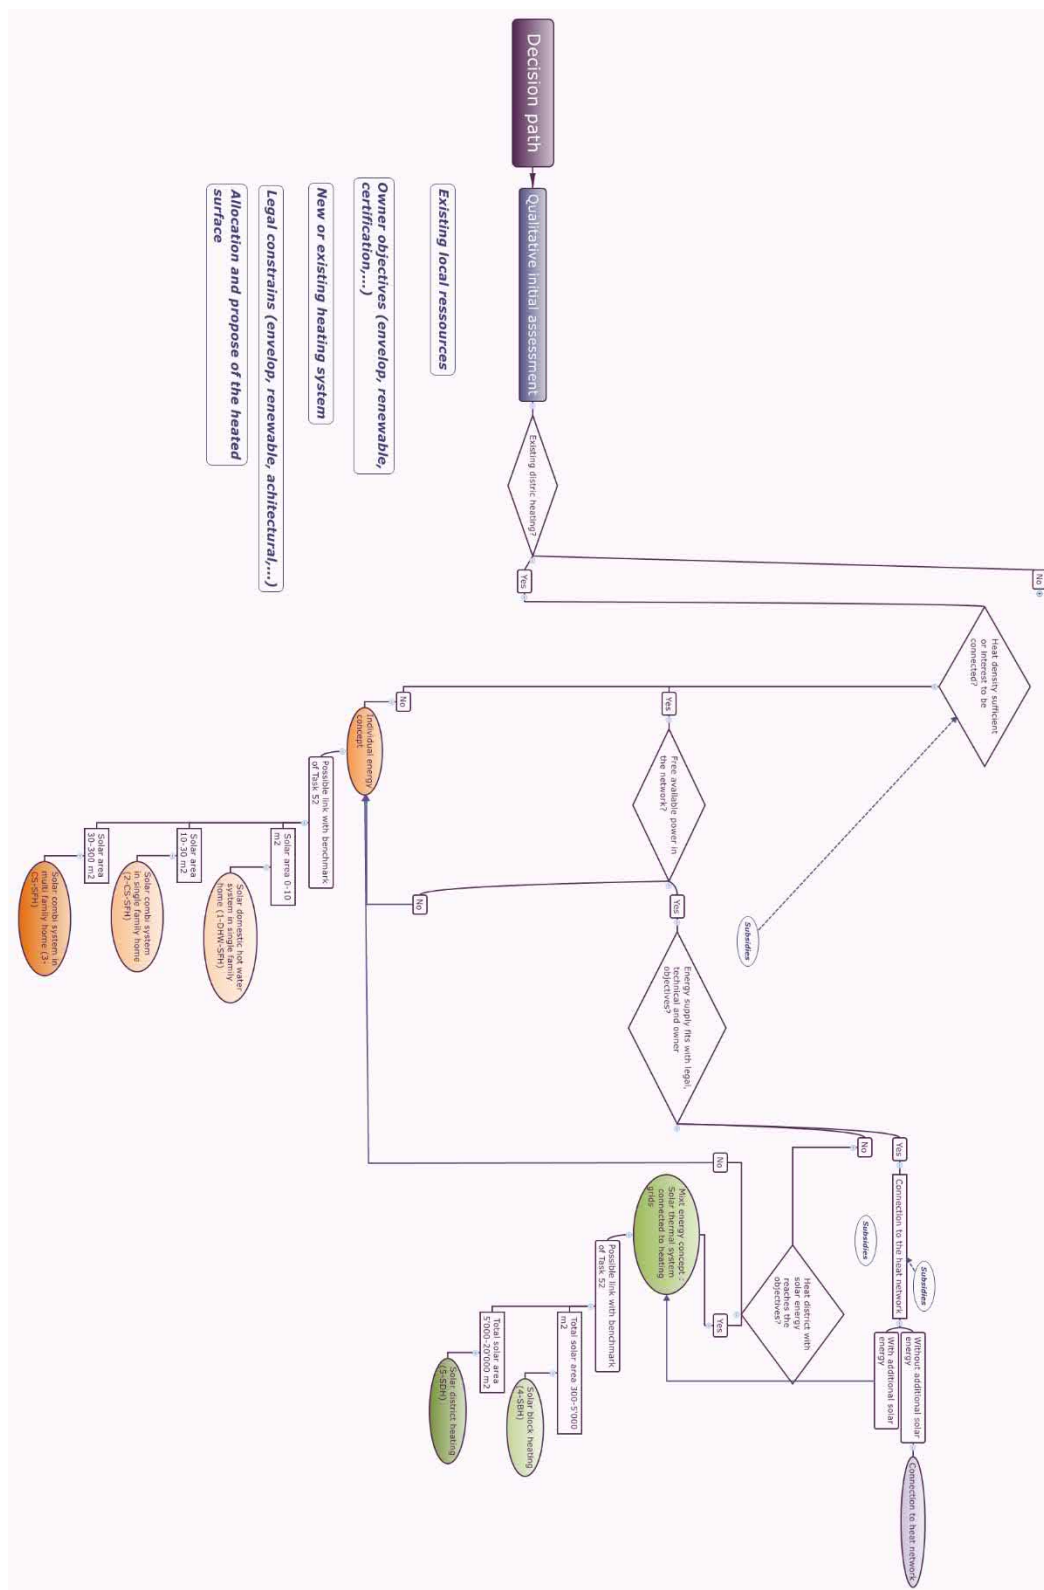


Figure 10 : Decision path representation. Part of the tree with existing district heating.

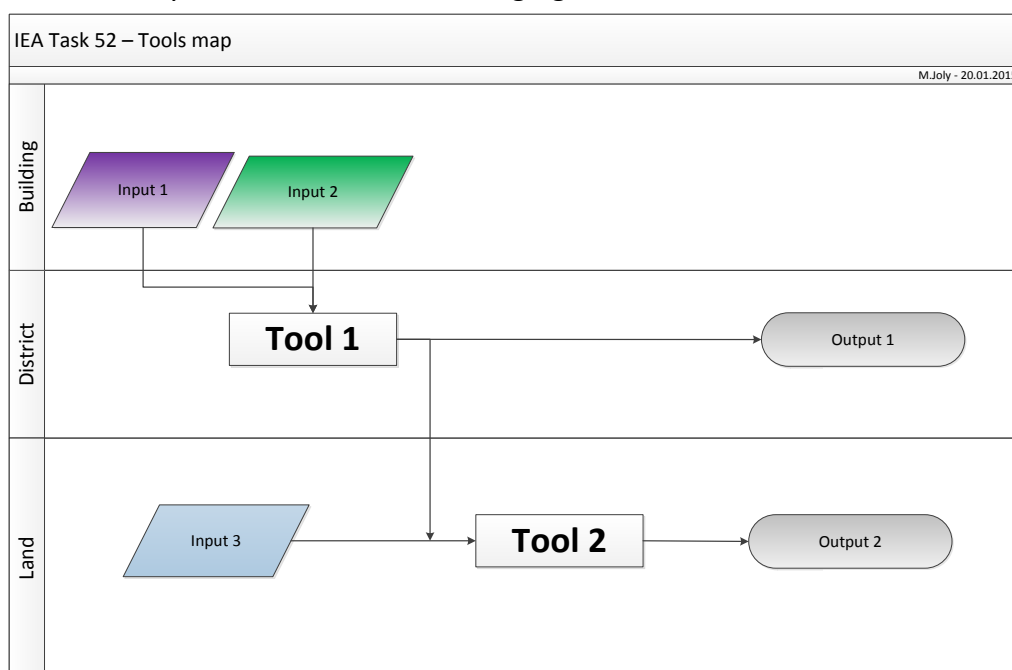


Figure 11 : Decision path representation. Part of the tree without existing district heating.

5.2 Tools description

In the following subsections, each tool will be described by a short description, a schematic representation and some comments on strength and weakness. The graphics are composed of shapes disposed in a table. The table is separated in three lines representing three scales resolution. From top to bottom, the first, second and third lines are related respectively to building, district and country dimension. On it are disposed shapes linked with arrows.

The square, containing the name of the tool, is placed in the table as a function of its space resolution. The coloured parallelepiped shapes linked to the square indicate the input elements needed to run the tool. The grey ovoid shapes linked to the square indicate the output of the tool. The preceding principles are schematically described in the following figure.



Tool name (developer)

This graphical representation of the flux allows us to:

- Understand the data flow in a wink
- Connect tools together in order to build complex chain tools


Moreover, the tools can be regrouped according to their function. The following classification groups were used:

- Tools for energy balancing
- Tools for thermal, electrical or hydraulic simulations
- Tools for optimization
- Others: GIS, tool frameworks, co-simulation platforms

5.2.1 Tools for energy balancing

5.2.1.1 EnergyPLAN

Short description: EnergyPLAN simulates the operation of national energy systems on an hourly basis, including the electricity, heating, cooling, industry, and transport sectors. The model is used by many researchers, consultancies, and policymakers worldwide. This is possible due to the key focus on sharing the model during its development. For example, the model has a user-friendly interface, it is disseminated as a freeware, there is a variety of training available including our forum, and existing models are already available for many countries. The EnergyPLAN model has been used in hundreds of scientific publications and reports.

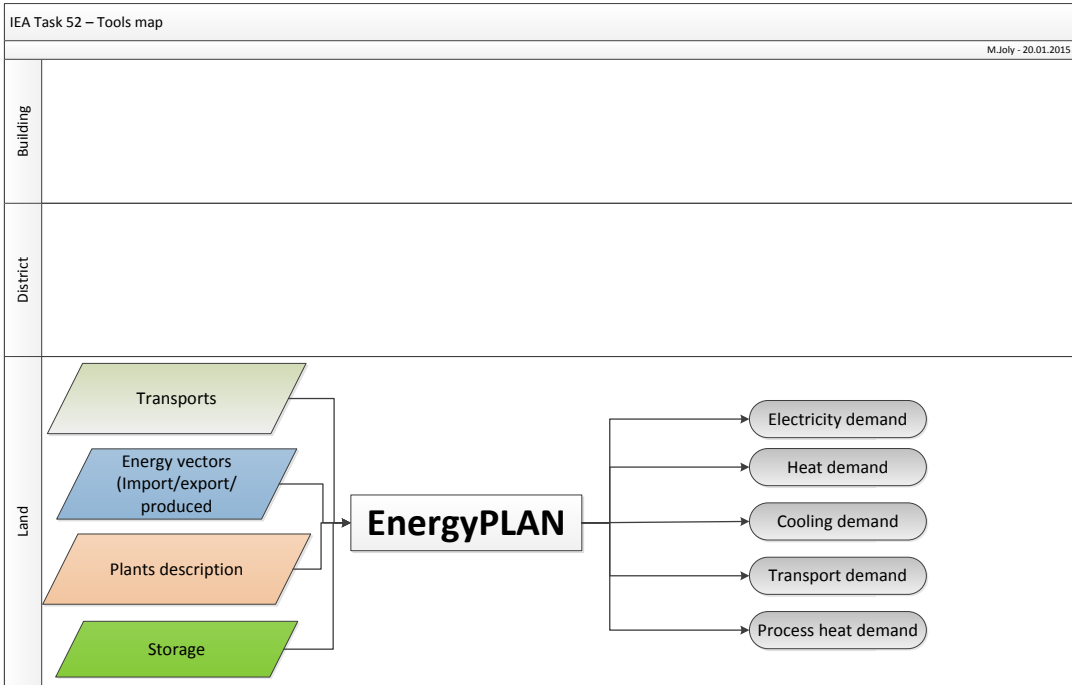


EnergyPLAN (Aalborg University, Danemark)

5.2.1.2 Energy PRO

Short description : energyPRO is the most advanced and flexible modelling software for combined techno-economic optimisation and analysis of both co- and trigeneration projects. With energyPRO you can model and simulate all kinds of energy plants in existing as well as planned energy projects. energyPRO-functions include:

- Calculate the optimal operation of an energy plant
- Make detailed investment analyses
- Model industrial cogeneration
- Simulate energy plants participating on different electricity markets
- Analyse the interaction between separate energy plants

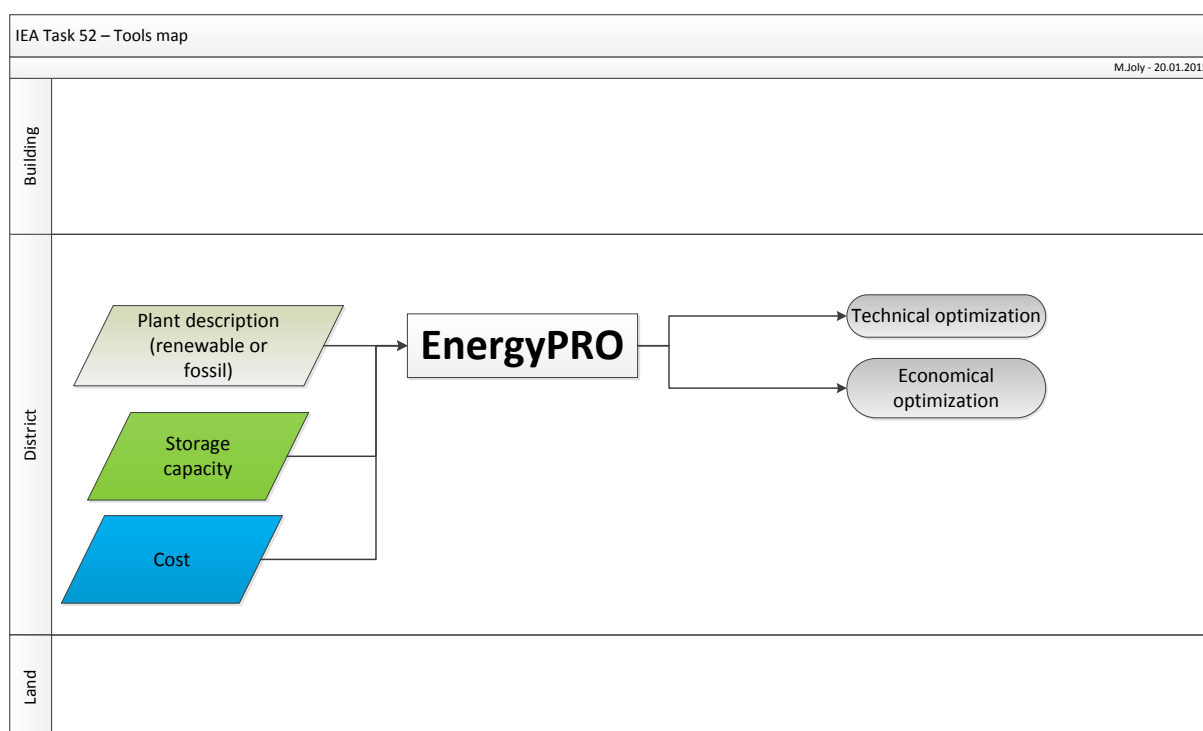


EnergyPRO (Aalborg University, Denmark)

5.2.1.3 INVERT/EE-Lab

Short description: Calculation of energy demand in buildings (space heating and cooling, hot water, and lighting), simulation of investment decisions in

- a) Renovation measures and thermal quality of new buildings,
- b) In new technologies for heating and hot water preparation; simulation of the diffusion of cooling appliances as well as investments in PV systems

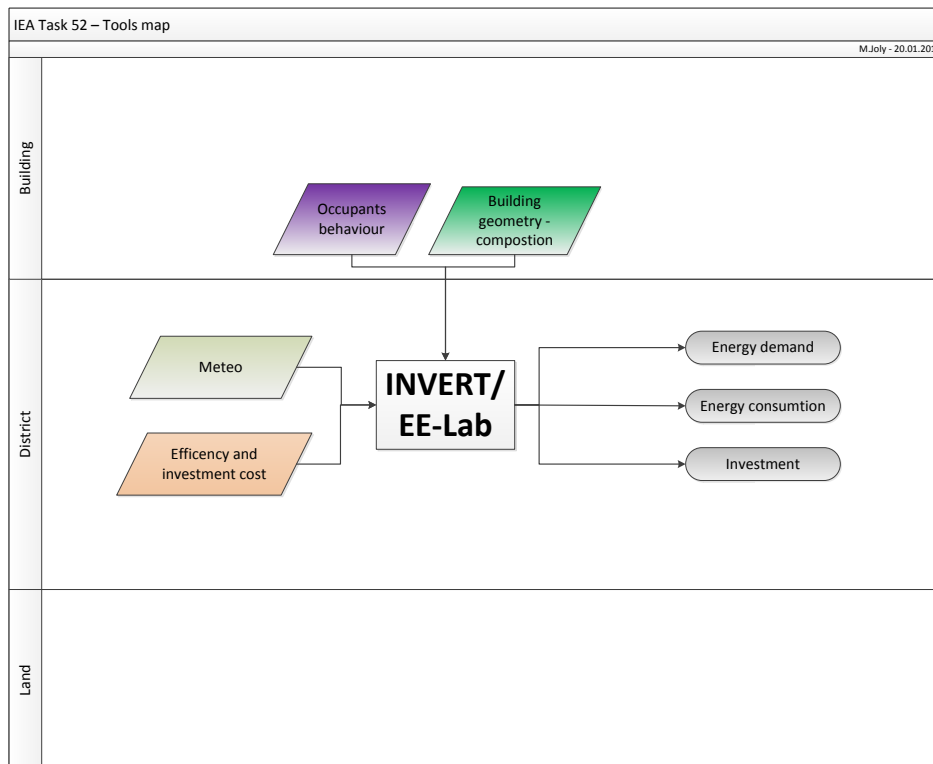

INVERT/EE-Lab (TU Vienna, Energy Economics Group)


Invert/EE-Lab is a dynamic bottom-up simulation tool and different scenarios can be simulated (price, insulation, behaviour). No GIS is used and the time resolution is one month.

Strength: this tool focuses on decentralized energy supply in the building.

This tool is already linked to an interface simulating the energy demand on an hourly basis.

5.2.1.4 REMOD-D

Short description: Remod-D for Regenerative Energy Model for Germany. This software aims to optimize the cost of national energy systems under a given operational hierarchy.

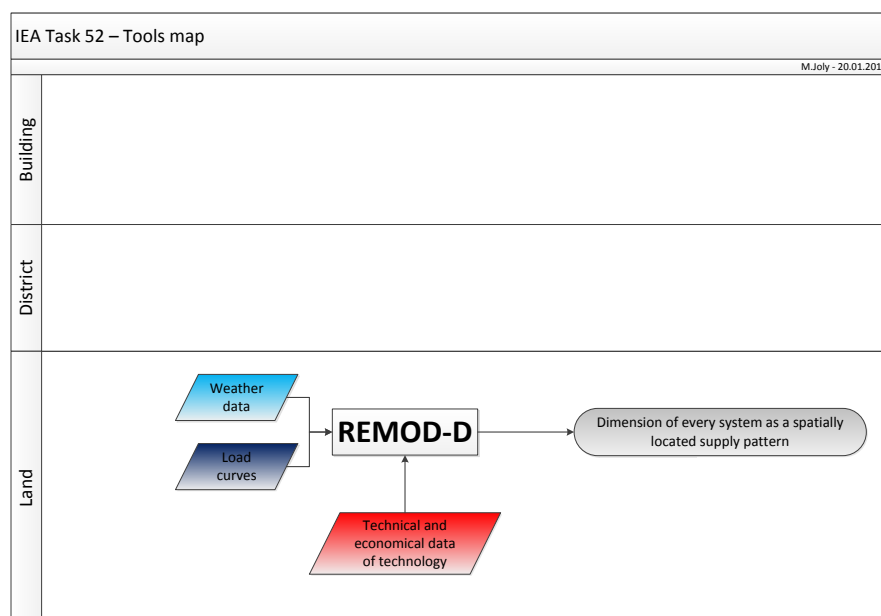


Remod-D (Fraunhofer ISE, DE)

Strength : this tool is able to manage optimisation of energy system at a land scale.
Its time resolution is one hour.

5.2.1.5 KomMod

Short description: This software aims to optimize the cost of urban/regional energy systems; simultaneous optimisation of structure and operation.

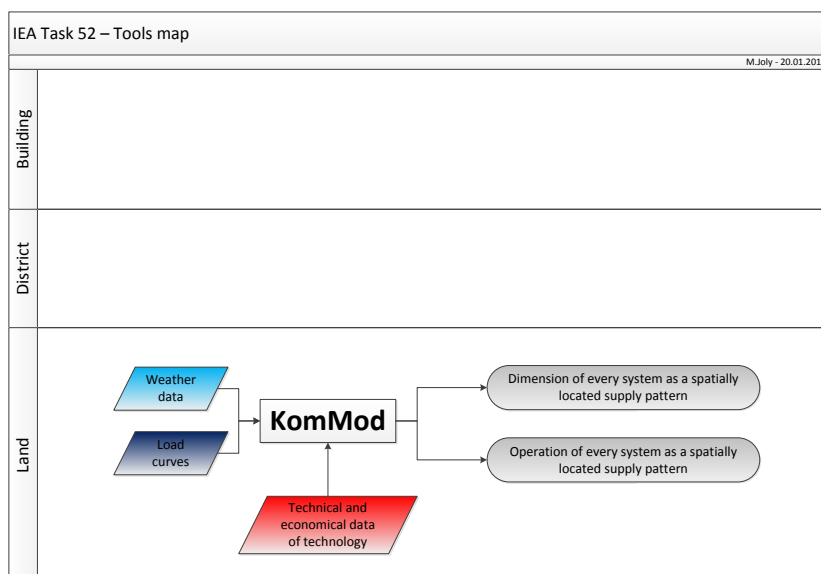


KomMod (Fraunhofer ISE, DE)

The main difference between this tool and the previous is the output. In this case, the operation of every system is given by the simulation.

5.2.2 Tools for thermal, electrical or hydraulic simulations

5.2.2.1 CitySim

Short description: The CitySim software is aiming to provide a decision support to minimise the net-use of non-renewable energy.

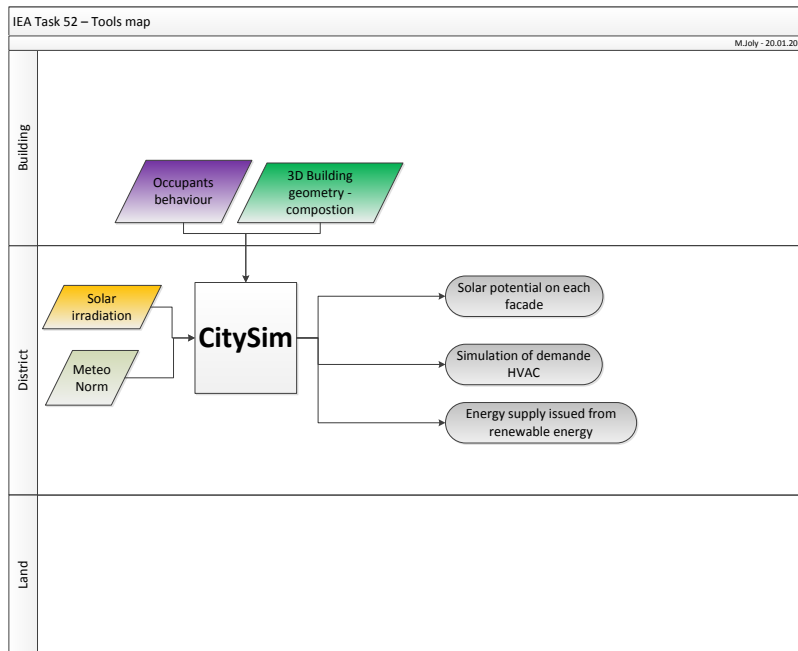

CitySim (LESO PB – EPFL)

CitySim is a software able to simulate the heat demand of a building. The occupant presence and behaviour is simulated by a stochastic model. Due to its 3D building geometry, the solar gains can be optimized. Sophisticated irradiation model is used considering the shading effect of the close horizon.

Strength: this tool calculates with a resolution of an hour the incoming sun radiation on building façade and roof. This hour by hour time resolution simulation is crucial for the evaluation of the heat flux and heat storage.

A developer team is working on this tool. The functionalities they plan to add are the following:


- Simulation of the production of thermal solar energy.
- Simulation of the solar thermal heat tank
- Simulation of the production of PV cells (already implemented)
- Simulation of the production of electricity by mean of wind turbine
- Simulation of the production and consumption of heat pump.

5.2.2.2 Trnsys 17.1

Description: TRNSYS is an extremely flexible graphically based software environment used to simulate the behaviour of transient systems. While the vast majority of simulations are focused on assessing the performance of thermal and electrical energy systems, TRNSYS can equally well be used to model other dynamic systems such as traffic flow, or biological processes.

TRNSYS is made up of two parts. The first is an engine (called the kernel) that reads and processes the input file, iteratively solves the system, determines convergence, and plots system variables. The kernel also provides utilities that (among other things) determine thermophysical properties, invert matrices, perform linear regressions, and interpolate external data files. The second part of TRNSYS is an extensive library of components, each of which models the performance of one part of the system. The standard library includes approximately 150 models ranging from pumps to multizone buildings, wind turbines to electrolyzers, weather data processors to economics routines, and basic HVAC equipment to cutting edge emerging technologies. Models are constructed in such a way that users can modify existing components or write their own, extending the capabilities of the environment.

After 35 years of commercial availability, TRNSYS continues to be a flexible, component-based software package that accommodates the ever-changing needs of both researchers and practitioners in the energy simulation community.

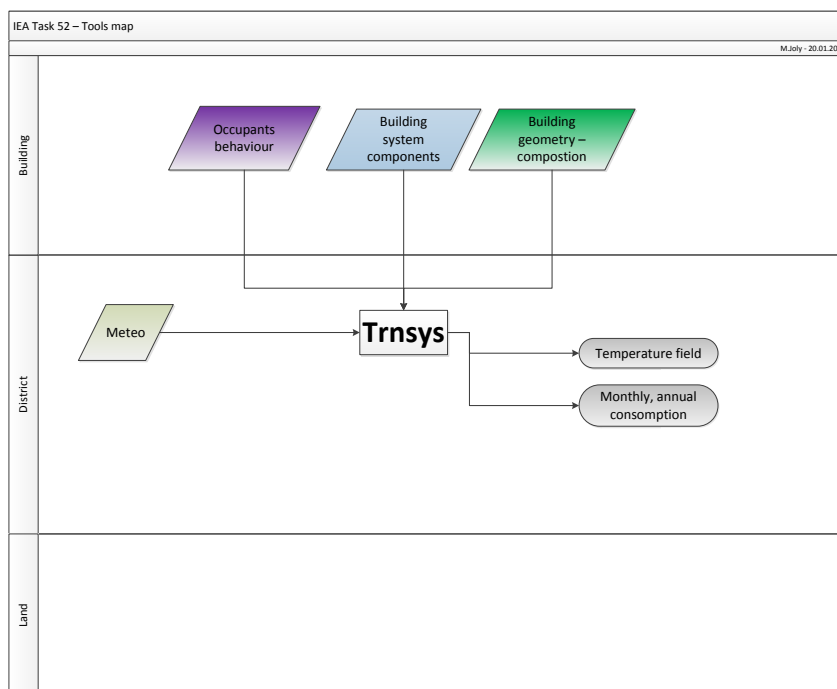


TRNSYS (University of Wisconsin, TESS, Transsolar)

Strength: very flexible tool to simulate complex situation on an hourly basis. The implementation of the model is quite complex.

5.2.2.3 B-Sol

Short description: B-Sol is a tool helping at the conception of a room or a building in order to characterize its thermal response.

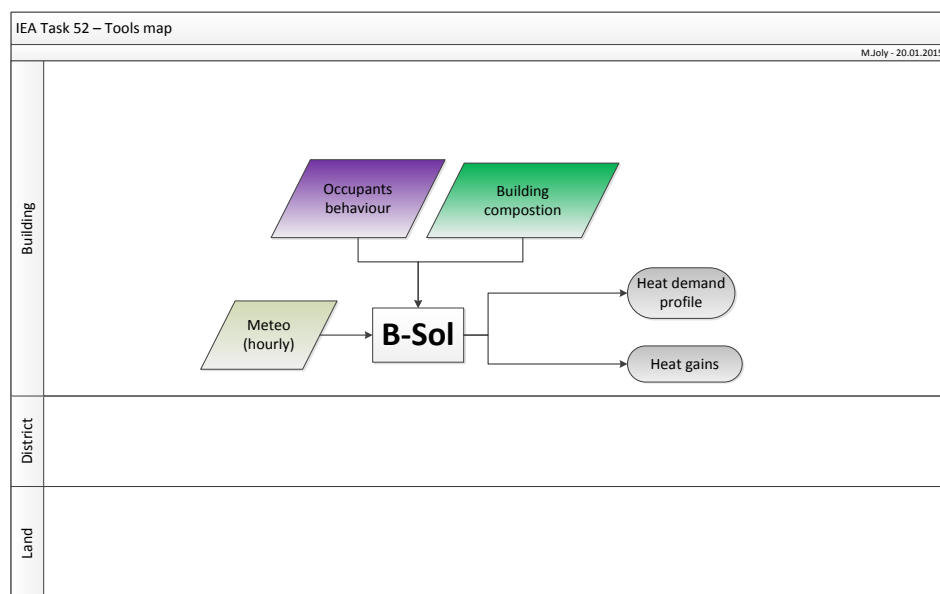


B-Sol (HES-SO)

This is a building simulation tool to determine the heat losses distributions. The simulations are performed based on building characteristics and considering solar gains. The close horizon can be manually defined.

Strength: The software is able to manage an hour by hour calculation. The solar thermal gains are taken into account in the behaviour of the building.

5.2.2.4 Polysun


Short description: Polysun is a simulation tool which can be used to design solar thermal, heat pump or photovoltaic systems as well as combined system.

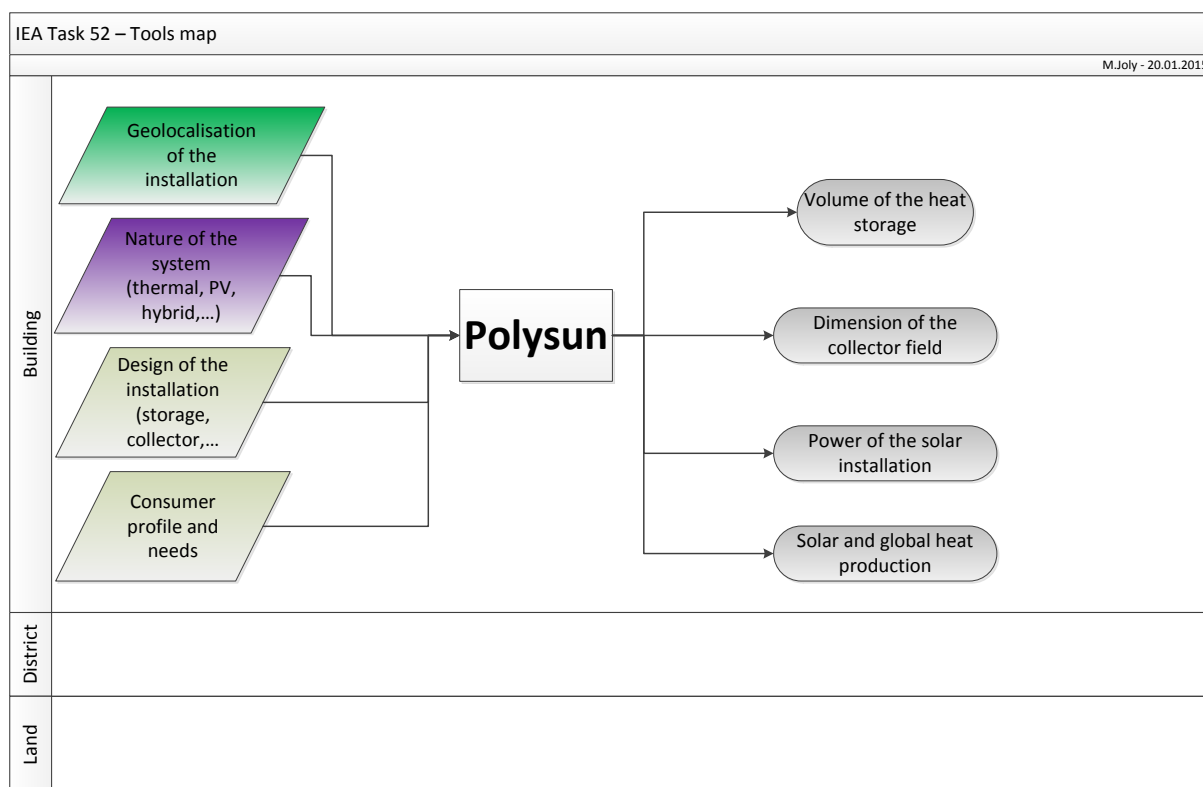

Polysun

5.2.2.5 SIMPLEX

Short description: Simplex is a software dedicated to the calculation, design and optimization of district heating networks which allows technical (thermo-hydraulic) and economic network simulation on a minute-by-minute, up to hourly time base. The software is used for both the optimization of the operating performance of existing heating networks (e.g.: analysis of heat or hydraulic losses, parameter variations) as well as for the design of new or the extension of existing heating networks.

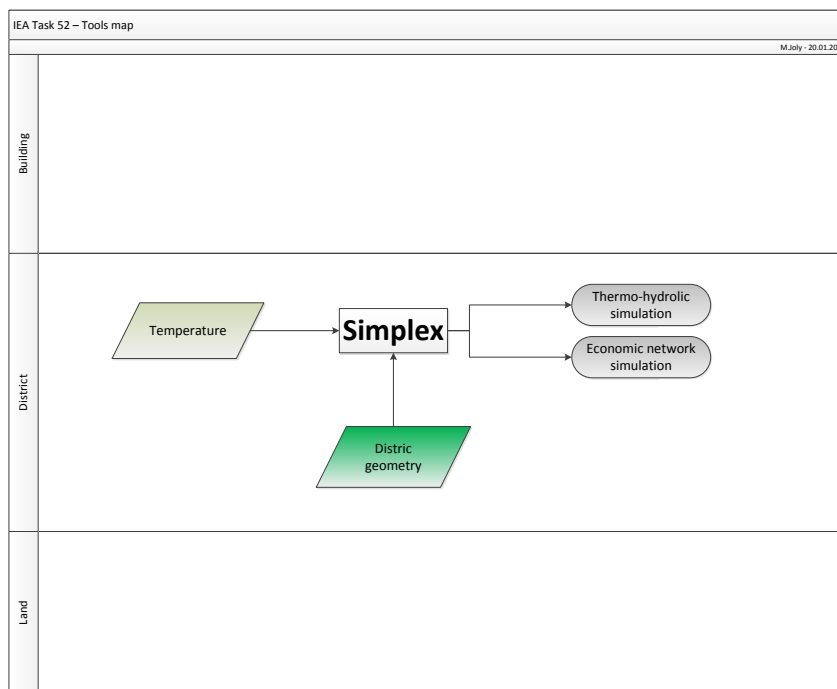

Simplex (Pink GmbH, Österreich)


Strength: the software is able to treat one building up to a city with 250-thousand people. The duration of the calculation time is three minutes up to one hour.

5.2.3 Tools for optimization

5.2.3.1 GenOpt 3.1.0

Short description: GenOpt® is an optimization program developed for the minimization of a cost function that is evaluated by an external simulation program (e.g. TRNSYS). Independent variables can be continuous variables (possibly with lower and upper bounds), discrete variables, or both.

GenOpt has a library with local and global multi-dimensional and one-dimensional optimization algorithms, as well as algorithms for doing parametric runs.

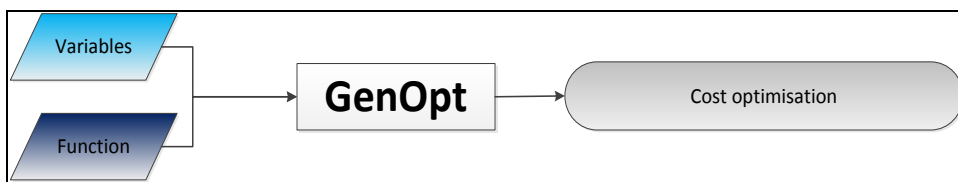


GenOpt (Lawrence Berkeley National Laboratory)

In our situation, GenOpt can be used to minimize many functions. It can be done for different scale such as a function linked to building consumption or in a city with district heating temperature. This tool is not sensitive to the question of time resolution.

Strength: this tool can be coupled to any simulation program. Using this tool with another one lead to a chain tool as it is the case in the next section.

5.2.3.2 TRNOPT 2.1.54

Short description: TRNOPT is a tool that links a TRNSYS simulation model with the GenOpt program for optimisation (by minimisation of a cost or error function). TRNOPT may also be used to calibrate simulation results to the data from the actual system. TRNOPT is also known as the "TESS Optimization Library" and is part of the TESS Component Library Package (for TRNSYS).

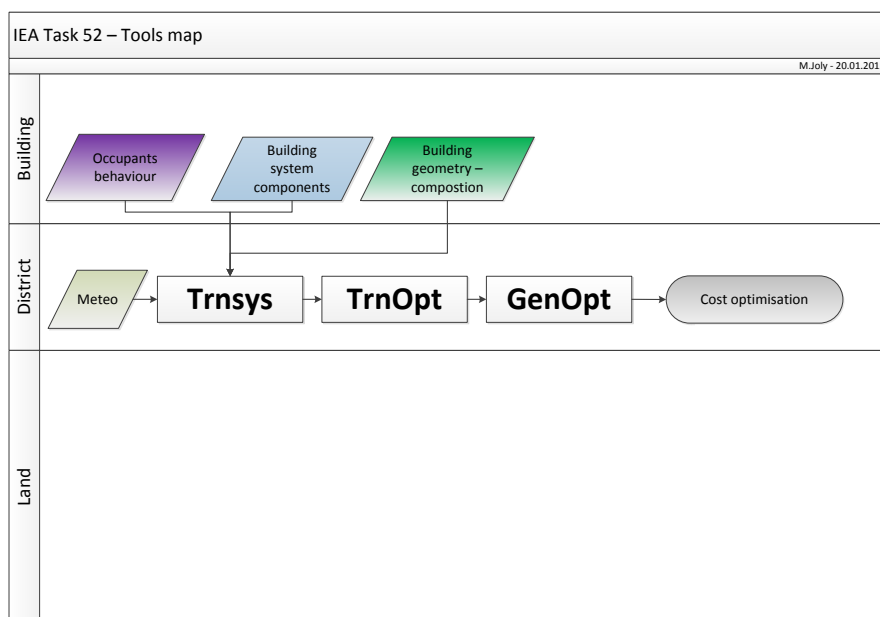


TRNOPT (University of Wisconsin, TESS)

5.2.4 Others : GIS, tool frameworks, co-simulation platforms

5.2.4.1 PlanETer

Short description: GIS tool dedicated to elaborate territorial energy planning in 4 main steps: energy balances of actual situation, renewable resources quantification, future heat demands simulation and identification of energy supply scenarios.

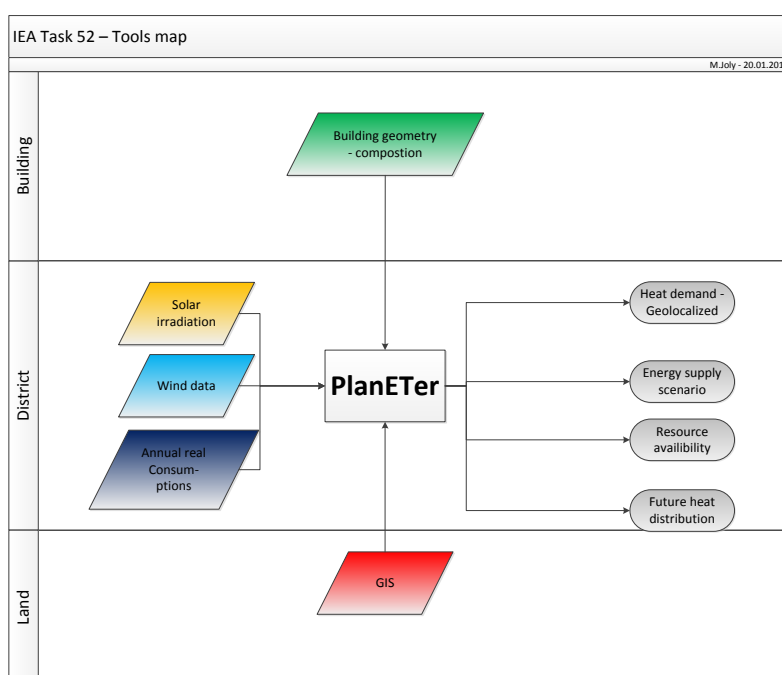

PlanETer (CREM), dedicated to future heat demands simulation energy supply scenarios


This tool developed by the CREM is built on the following methodology:

- Mapping of the territory with a GIS tool. The maximal resolution is the building
- Determination of the annual consumption of the buildings
- Evaluation of the future needs for heat
- Evaluation of the resources, renewable or not, available on the considered territory.
- Identification of the present and future synergies between the needs and the resources
- Elaboration of proposition for territory energy supply scenarios.

This tool is based on annual need and consumption. His strength is the possibility to elaborate energy supply scenarios at the scale of a district for municipalities. The thermal or electric annual solar energy potential can be given by this tool.

5.2.4.2 MEU

Short description: The MEU GIS web-platform enables detailed monitoring and planning for both energy demand and supply at individual building and neighbourhood level.

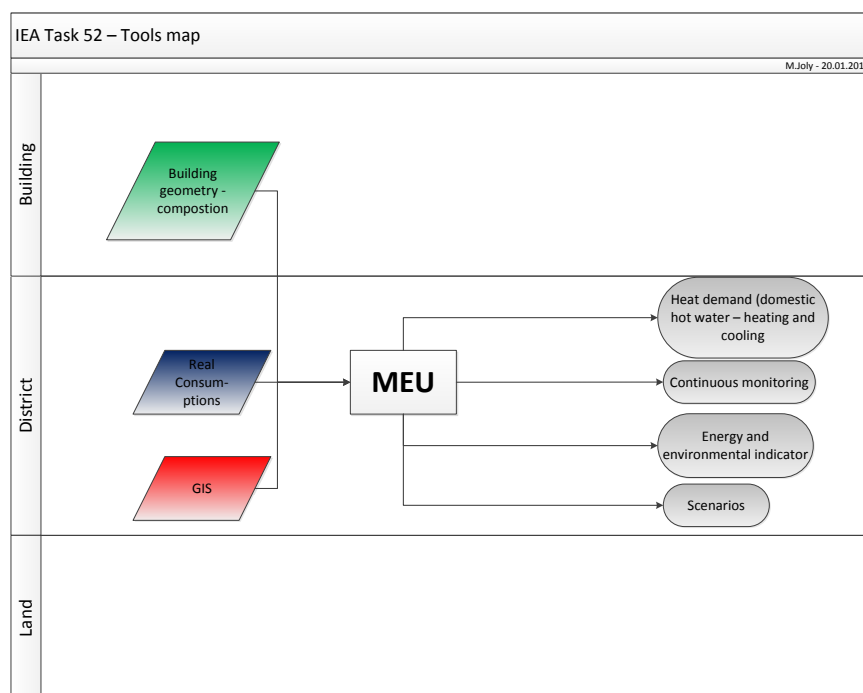


MEU (CREM).

The MEU data basis is a powerful GIS tool to give a picture of the complex consumption of a city. The consumption of the buildings can be obtained either by using the real consumption bill or by using the CitySim simulation tool (EPFL thesis 6102, D. Perez, 2014).

Strength: This web tool is powerful to guide the energy planner in their future choices. In Switzerland, four towns are using this tool.

5.2.4.3 Smart Heat Design

Short description: Optimization method for pre-designing the most exergy-efficient systems in a given urban perimeter (districts)

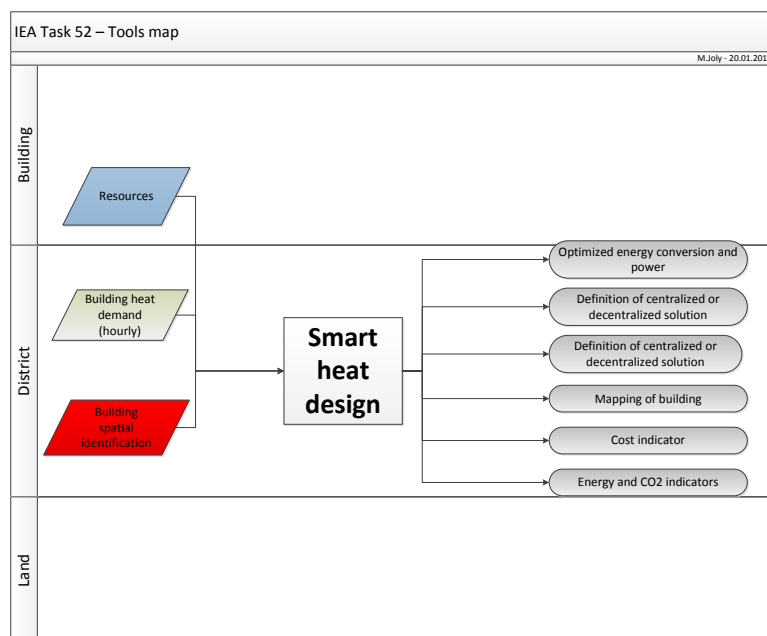

Smart heat design (CREM – EPFL – HES-SO)


Smart heat design is a software developed by the CREM. As well as MEU or PlanETer, this tool is based on a GIS data basis. Its goal is the optimization of the district heating.

Strength: This hour by hour calculating tool is able to optimize thermodynamics distributed network. In this network, producers and consumers are connected and decentralize production system can be implemented.

This tool is already a chain tool.

5.2.5 Time resolution

Another goal of this survey is the description of the space and time resolution of each tool. In the following graph are represented the space resolution with respect to the left axis. The time resolution is given by the colour of the strip for each tool.

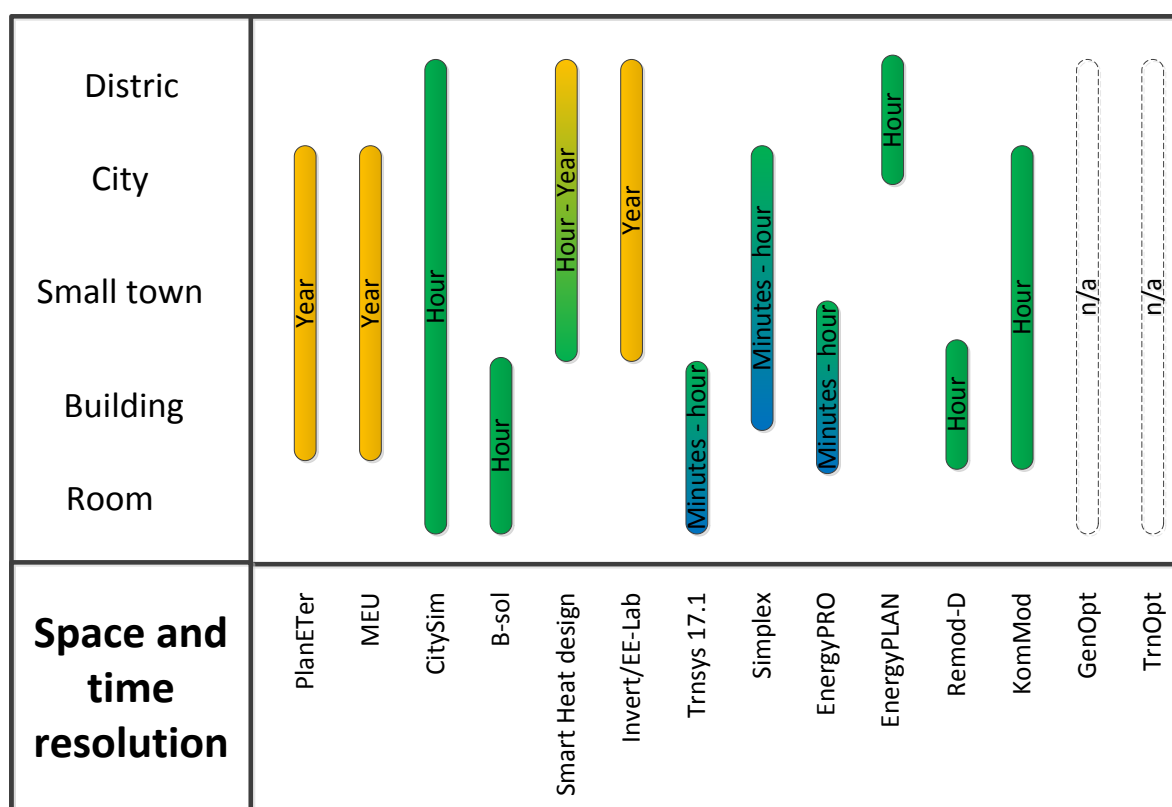



8.2 TECHNOLOGY AND DEMONSTRATORS - Technical Report Subtask B – Part B3 F. Mauthner, M. Joly and P. Bourdoukan, 2017



TECHNOLOGY AND DEMONSTRATORS

Technical Report Subtask B – Part B3

B3: Case studies

Technical Report Subtask C – Part C2

C2: Analysis of built best practice examples and conceptual feasibility studies

Franz Mauthner

AEE INTEC
Gleisdorf, Austria



Martin Joly, Paul Bourdoukan

Sorane SA
Ecublens, Switzerland



With contributions from:

Daniel Trier, Linn Laurberg Jensen PlanEnergi Zealand Copenhagen, Denmark	
Bengt Perers, Simon Furbo, Zhiyong Tian Technical University of Denmark Copenhagen, Denmark	
Sebastian Herkel, Mehmet Elci, Axel Oliva Fraunhofer-Institute for Solar Energy Systems Freiburg, Germany	
Christine Weber BKW AG Bern, Switzerland	
Gabriel Ruiz CREM - Centre de Recherches Energétiques et Municipales Martigny, Switzerland	
Martin Andersen, Jan-Olof Dalenbäck Dalarna University / Chalmers University of Technology Falun / Gothenborg, Sweden	
Martin Joly, Paul Bourdoukan Sorane SA Ecublens, Switzerland	
Franz Mauthner AEE INTEC Gleisdorf, Austria	

Apart from the above mentioned participants of IEA SHC Task 52, the following companies and institutions provided valuable inputs to the respective best practice examples:

Johan Frey Dronninglund Fjernvarme A.m.b.a. Dronninglund, Denmark	
---	--

Andreas Zourellis Aalborg CSP A/s Aalborg, Denmark	
Norbert Dorfinger Salzburg AG für Energie, Verkehr und Telekommunikation Salzburg, Austria	
Inge Strassl SIR - Salzburg Institute for Regional Planning and Housing Salzburg, Austria	
Alexander Ripka badenovaWÄRMEPLUS GmbH & Co. KG Freiburg i.Br., Germany	
Fabien Kuchler Lauber IWISA AG Naters, Switzerland	
Bernard Thissen Energie Solaire S.A. Sierre, Switzerland	

IEA Solar Heating and Cooling Programme (IEA SHC)

The Solar Heating and Cooling Technology Collaboration Programme was founded in 1977 as one of the first multilateral technology initiatives ("Implementing Agreements") of the International Energy Agency. Its mission is *"to enhance collective knowledge and application of solar heating and cooling through international collaboration to reach the goal set in the vision of solar thermal energy meeting 50% of low temperature heating and cooling demand by 2050"*.

The members of the IEA SHC collaborate on projects (referred to as "Tasks") in the field of research, development, demonstration (RD&D), and test methods for solar thermal energy and solar buildings.

A total of 59 projects have been initiated, 51 of which have been completed. Research topics include:

- Solar Space Heating and Water Heating (Tasks 14, 19, 26, 44, 54)
- Solar Cooling (Tasks 25, 38, 48, 53)
- Solar Heat or Industrial or Agricultural Processes (Tasks 29, 33, 49)
- Solar District Heating (Tasks 7, 45, 55)
- Solar Buildings/Architecture/Urban Planning (Tasks 8, 11, 12, 13, 20, 22, 23, 28, 37, 40, 41, 47, 51, 52, 56, 59)
- Solar Thermal & PV (Tasks 16, 35)
- Daylighting/Lighting (Tasks 21, 31, 50)
- Materials/Components for Solar Heating and Cooling (Tasks 2, 3, 6, 10, 18, 27, 39)
- Standards, Certification, and Test Methods (Tasks 14, 24, 34, 43, 57)
- Resource Assessment (Tasks 1, 4, 5, 9, 17, 36, 46)
- Storage of Solar Heat (Tasks 7, 32, 42, 58)

In addition to the project work, there are special activities:

- SHC International Conference on Solar Heating and Cooling for Buildings and Industry
- Solar Heat Worldwide – annual statistics publication
- Memorandum of Understanding – working agreement with solar thermal trade organizations
- Workshops and seminars

Country Members

Australia	France	Spain
Austria	Germany	Sweden
Belgium	Italy	Switzerland
Canada	Mexico	Turkey
China	Netherlands	Portugal
Denmark	Norway	United Kingdom
European Commission	Slovakia	

Sponsor Members

European Copper Institute	International Solar Energy Society
ECREEE	RCREEE
Gulf Organization for Research and Development	

For more information on the IEA SHC work, including many free publications, please visit www.iea-shc.org.

The contents of this report do not necessarily reflect the viewpoints or policies of the International Energy Agency (IEA) or its member countries, the IEA Solar Heating and Cooling Technology Collaboration Programme (SHC TCP) members or the participating researchers.

Content

1	Scope and content of Subtask C	6
2	Scope and content of Subtask B	6
3	Methodology	6
4	Analysis of best practice examples and feasibility studies	7
4.1	Solar district heating with seasonal storage in the city of Dronninglund, DK.....	8
4.2	Hybrid solar district heating in the city of Taars, DK.....	18
4.3	Solar-assisted urban quarter “Salzburg-Lehen”, AT.....	25
4.4	Solar-assisted urban quarter “Freiburg-Gutleutmatten”, DE.....	33
4.5	Solar-assisted residential area “Vallda Heberg” in Kungsbacka, SE.....	41
4.6	Solar assisted apartment blocks “La Cigale” in Geneva, CH.....	50
4.7	Solar-assisted mountain holiday resort “Reka Feriendorf” in Naters, CH.....	58
4.8	Solar-assisted urban quarter “Buchsee-Köniz” in Berne, CH.....	65
4.9	Solar-assisted urban quarter “Renens-CFF” in the suburb of Lausanne; CH	72
5	Literature References	77

1 Scope and content of Subtask C

In the framework of IEA-SHC Task 52 the future role of solar thermal in urban energy systems is investigated. In Subtask C “*Technology and Demonstrators*” an overview and analysis over corresponding state-of-the-art applications is given.

In Report [C1: Classification and benchmarking](#), solar thermal system configurations suitable for applications in urban environments are identified and characterized by representative techno-economic benchmark figures from a set of best practice examples. Objective is to provide a comprehensive data base for techno-economic (pre-) evaluations, especially applicable for urban planners / energy system planners without deeper theoretical solar thermal expertise.

In Report [C2: Analysis of best practice examples](#), information about built best practice examples as well as conceptual feasibility studies of solar thermal applications in urban environments is summarized. Objective is to highlight technical potentials, innovative approaches and restrictions of solar thermal applications in urban environments in a holistic energy system context on the one hand and to identify and describe lessons learned regarding applied methodologies, success factors and barriers on the other side.

In addition, a [Best-practice Leaflet](#) provides flash light information and impressions about seven best practice examples from Austria, Denmark, Germany, Sweden and Switzerland. The examples represent the entire range of solar thermal system configurations suitable for applications in urban environments including systems, which are hydraulically connected to a district or block heating grid, as well as systems which are directly attached to individual buildings.

2 Scope and content of Subtask B

Subtask B “*Methodologies, Tools and Case studies*” aims at providing methodologies to support technical and economical calculations and decision paths for successful integration of solar thermal applications in urban environments. The intention is to identify urban planning methodologies and calculation techniques capable to ensure an objective evaluation of the role of solar thermal in urban energy scenario’s reflecting future regional, national and international boundary conditions.

The use of solar thermal can be differently weighted depending on the size and the boundary of the concerned energetic systems. In Subtask B, case studies for integrating solar thermal systems into urban and regional energy systems were performed.

This document, compiled with Subtask C, represents the deliverable [B2: Report on Case studies](#).

3 Methodology

The analysis of built best practice examples and conceptual feasibility studies is based on information gathered in the framework of a comprehensive questionnaire survey. For each case, information about both technology specific aspects as well as non-technological aspects was asked.

Each case description (chapters 4.1 to 4.9) follows the same sub-chapter structure:

- 4.x.1 Introduction and description
- 4.x.2 Technical description of the concept and innovative approaches
- 4.x.3 Decision and design process
- 4.x.4 Lessons learned (barriers and success factors)
- 4.x.5 Summary

4 Analysis of best practice examples and feasibility studies

In sum, nine questionnaires were filled-in by Task participants in co-operation with involved stakeholders such as city council departments, real estate developers, local utilities and technical consultants. Case Studies from Denmark, Sweden, Germany, Austria and Switzerland are described.

CaseNr	BP	FS	Title of case study	Country
1	✓	✗	Solar district heating with seasonal storage in the city of Dronninglund, DK	DK
2	✓	✗	Hybrid solar district heating in the city of Taars, DK	DK
3	✓	✗	Solar-assisted urban quarter "Salzburg-Lehen", AT	AT
4	✓	✗	Solar-assisted urban quarter "Freiburg-Glutleutmatten", DE	DE
5	✓	✗	Solar-assisted residential area "Vallda Heberg" in Kungsbacka, SE	SE
6	✓	✗	Solar assisted apartment blocks "La Cigale" in Geneva, CH	CH
7	✓	✗	Solar-assisted mountain holiday resort "Reka Feriendorf" in Naters, CH	CH
8	✗	✓	Solar-assisted urban quarter "Buchsee-Köniz" in Berne, CH	CH
9	✗	✓	Solar-assisted urban quarter "Renens-CFF" in the suburb of Lausanne; CH	CH

*BP...built best practice example

**FS...conceptual feasibility study

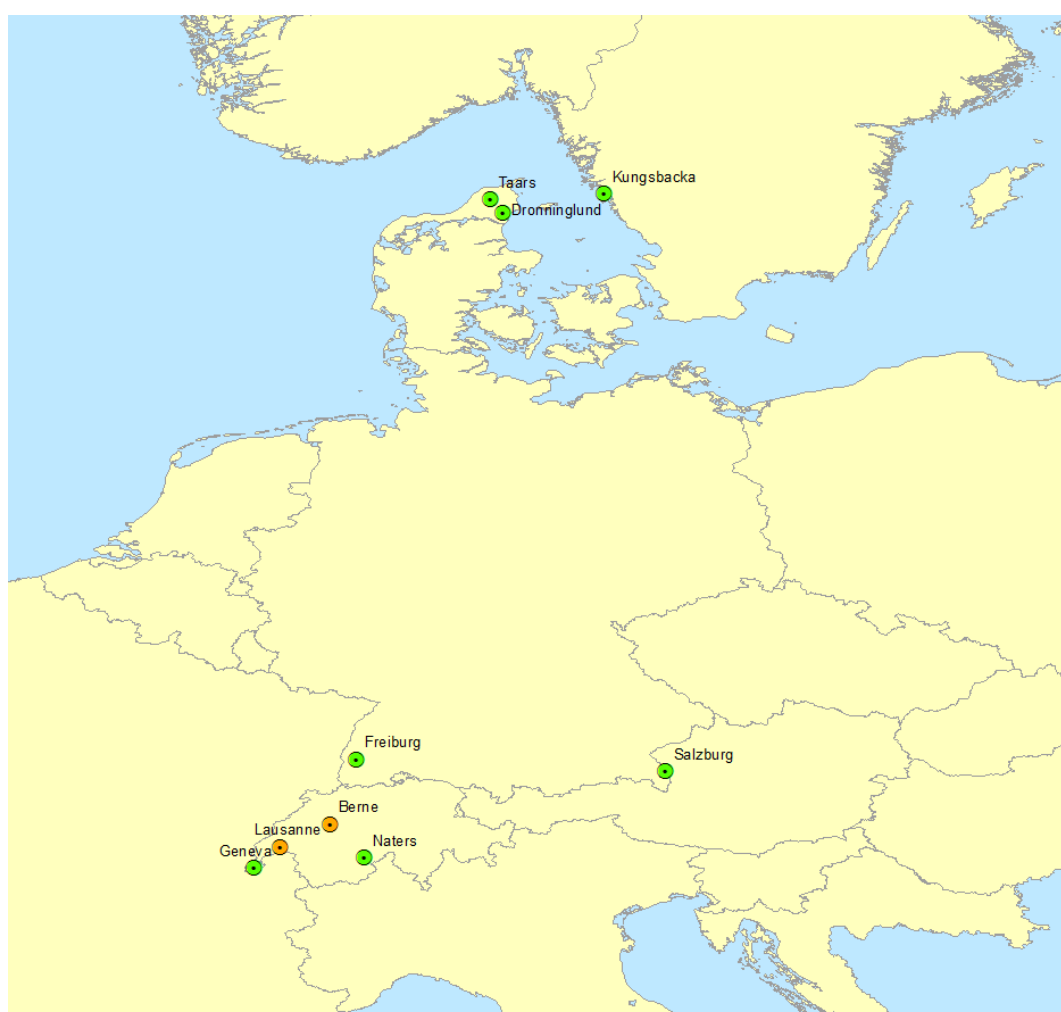


Figure 1: Location of the investigated case studies (green: built best practice example, orange: conceptual feasibility study)

4.1 Solar district heating with seasonal storage in the city of Dronninglund, DK

Authors:

Daniel TRIER	PlanEnergi	dt@planenergi.dk
Linn Laurberg JENSEN	PlanEnergi	lj@planenergi.dk



Figure 2: Aerial view on the solar district heating system of Dronninglund Fjernvarme (Source: Brønderslev Municipality). A flat plate collector field (1by) with a gross collector area of 40,466 m² hydraulically connected to a 62,000 m³ pit thermal energy storage (29k) as well as to an absorption heat pump with 2.6 MW_{th} heating capacity for improved operation flexibility was put into operation in 2014. From 06/2015-05/2016 48 % of the annual DH output originated from solar thermal.

Project fact box /2/, /3/:**General information:**

Location: **Northern Denmark (Jutland), Brønderslev Municipality**
 Urban scale of area: **633 km² (municipality) / 2.8 km² (city)**
 Population in the area: **36,047 (municipality) / 3,394 (city); 2016**
 Building mix in the area (city): **Mainly single-family homes, few multi-storey buildings**
 Plant owner: **Consumer-owned cooperative with limited liability (Dronninglund Fjernvarme A.m.b.A)**

Specific information about Dronninglund Fjernvarme A.m.b.A:

Heated (gross) floor area (supplied by district heating): **approx. 309,000 m² (2015/16)**
 Final thermal energy consumption (heat generated, incl. thermal losses): **35.726 MWh (2015/16)**
 Useful thermal energy consumption (heat sold): **27.652 MWh (2015/16)**
 Network heat losses: **8,074 MWh (2015/16) (22.6 %)**
 Heating grid trench length: **46 km (only distribution grid, length of service pipes not considered)**
 No. of building substations: **approx. 1,350**
 Supply/Return temperature levels: **Supply 75°C, return 40°C**
 (Thermal) energy supply technologies: **N-Gas CHP (5.9 MW_{th}/3.7 MW_{el}), bio-oil boiler (10 MW_{th}), N-Gas boiler (8 MW_{th}), solar thermal (26.3 MW_{th}), absorption heat pump (2.6 MW_{th} heating)**

Specific information about the solar thermal part:

Solar thermal collector area: **40,466 [m²_{gross}] / 37,573 [m²_{aperture}] (2,982 panels)**
 Thermal energy storage: **Pit heat storage (seasonal storage): approx. 62,000 m³; tank thermal energy storage (diurnal storage, load balancing): 865 m³**
 Annual solar energy yield: **17,201 MWh (06/2015-05/2016 [*] /1/**
 Solar fraction: **48% (based on heat generated resp. final DH output)**
 Specific annual solar energy yield: **425 kWh/ (m²_{gross}·a) / 458 kWh/ (m²_{aperture}·a), 2015/2016**

Economics of the solar thermal part:

Total project cost: **14.63 M EUR (excl. VAT); grant/funding (excl. VAT): 2.95 M EUR (20.2%)**

<i>Solar thermal collector field incl. piping and foundations</i>	41.7%
<i>Pit heat water storage incl. heat exchanger, pumps, piping</i>	16.4%
<i>Technique building with pipes, pumps, heat exchangers, control</i>	16.4%
<i>New district heat piping, excavation and mounting</i>	9.1%
<i>Oil boilers / absorption heat pump</i>	6.3%
<i>Land / contingencies</i>	5.5%
<i>Consulting / engineering</i>	4.6%

[*] From <http://solarheatdata.eu/> (accessed on 01/2017)

4.1.1 Introduction and description

History of Dronninglund district heating /3/, /4/

Dronninglund Fjernvarme A.m.b.A was established in 1973 as a consumer-owned cooperative with limited liability (as most other district heating (DH) utilities in Denmark). Initially, heat supply was exclusively based on oil boilers. In 1989, it became the first Danish district heating company to install natural gas-driven engines for combined heat and power production. Around 2005, the board and the general assembly of Dronninglund Fjernvarme realized that they should replace natural gas with renewable energy over time.

At that time, several Danish district heating utilities had already gained experiences with large scale solar thermal systems that could cover up to 20 % of the annual district heating demand **without increasing consumer heat prices**. Dronninglund Fjernvarme decided to go further and targeted a **solar fraction of 50 %**. In 2007, *Nordjyllands Vækstforum* (forum for regional business) subsidized a pre-feasibility study. From a technical perspective the study showed that a **large-scale solar thermal system combined with a seasonal storage** could meet this objective. Moreover, it has been found that the heat production price would not be increased for the consumer with a subsidized investment. Consequently, Dronninglund Fjernvarme decided to continue the project and applied for subsidy from EUDP (Energy Technology Development and Demonstration Programme), a program financed by the Danish state. The application was approved and subsidy was granted for detailed design and for investments in long-term storage, piping, heat exchangers and a control system to connect the production units (subsidy amounted to around 20 % of the entire system cost – see fact box).

New Dronninglund solar-assisted district heating system with seasonal pit heat storage was put into operation in May 2014. By end of 2016, the district heating utility supplies around 1,350 consumers via 46 km of district heating network. In the period 06/2015-05/2016 48 % of the annual district heat output originates from solar thermal.



Figure 3: Pit heat storage in Dronninglund with the solar collector field seen in the back (Source: Dronninglund Fjernvarme A.m.b.A)

4.1.2 Technical description of the concept and innovative approaches

The main components in the new production plant are the large solar thermal plant hydraulically connected to seasonal pit heat water storage as well as to an absorption heat pump (Figure 4).

Overall, the Dronninglund district heating system comprises the following system components:

- Four natural gas CHP units (approx. 5.9 MW of heat and 3.7 MW electricity)
- 865 m³ non-pressurized tank thermal energy storage for load balancing
- Bio oil boiler (10 MW_{th} in regular hot water mode for peak load resp. 6 MW_{th} in superheated hot water mode for absorption heat pump operation)
- 8 MW_{th} N-Gas hot water boiler as backup heating system
- Absorption heat pump (approx. 2.6 MW_{th} heating / 2.1 MW_{th} cooling capacity).

- Pit heat storage (approx. 62,000 m³)
- Ground-mounted collector field (2,982 solar thermal collectors with a total of 37,573 m² aperture area – corresponding to a thermal peak capacity of 26.3 MW)

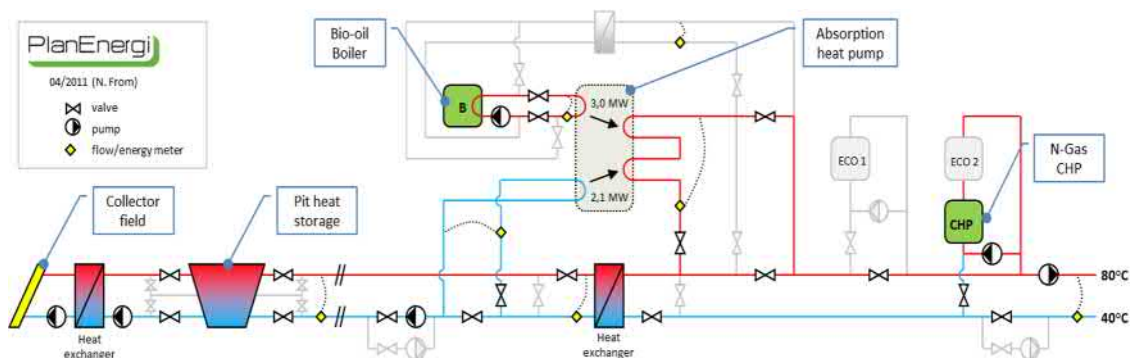


Figure 4: Dronninglund District heating principle diagram including solar thermal collector field, pit heat storage and absorption heat pump (Source: PlanEnergi) *Note: the diagram is simplified and not all equipment is shown*

Operating principle and seasonal operating modes:

In summer (non-heating season), solar thermal energy supply by far exceeds thermal energy demand of the connected consumers in Dronninglund. The surplus is used to heat up (charge) the pit heat storage to a maximum temperature of 90 °C (limited by the liner material). In autumn (heating season), hot water is taken out from the upper storage part for district heating while the cooler district heating return flow enters the bottom part of the energy storage with a temperature of around 40 °C (discharging). If the temperature from the pit heat storage is lower than the required district heating supply temperature the missing energy may be provided by the absorption heat pump (driven by superheated hot water with 160 °C from the bio-oil boiler). Otherwise, district heating is conventionally supplied in boiler and/or CHP mode.

While heat pump operation, the district heating return flow is used as heat sink and temperature is decreased down to 10 °C (minimum: 8 °C) before water enters the pit heat storage. This has several positive effects on the entire system efficiency: On the one hand, storage capacity is increased meaning that with similar storage volume more energy can be stored (higher ΔT). Second, average storage temperature is decreased which decreases thermal energy storage losses and third, efficiency of the solar thermal collectors is increased due to lower operating temperatures.

Pit heat storage and lid-design:

More and more utilities in Denmark look towards introducing solar heat or increasing the share of solar heat they already have. Typically, solar fractions of 5-20 % can be reached with short-term (diurnal) storages [1] but for higher solar fractions of up to 50-60 % seasonal storages are needed. Although different concepts for seasonal thermal energy storage are available, pit heat storages are the most promising technology today with several installations realized all over Denmark (e.g. Marstal and Vojens among others).

Solar thermal has in general made progress in recent years in the Danish district heating systems and in 2017 the Danish town of Silkeborg holds the record for having the world's largest solar heating system with a collector aperture area of 156,694 m² (corresponding to a thermal peak capacity of 110 MW). There are several reasons for this development; taxes on natural gas (no taxes on solar thermal), prohibition of additional biomass in natural gas-fired power plants as well as one year of solar production can be counted as energy savings the first year of operation. It is also essential that

¹ 20 % solar fraction on an annual basis corresponds to about 100 % coverage in the summer months.

the technology is reliable with a long life (over 25-30 years) and that the industry shares knowledge and experience, e.g. through the Danish District Heating Association [e.g. /5/].

The technology is still relatively young and several R&D agendas have been addressed in the framework of the Dronninglund project:

- Demonstration of full-scale pit heat storage combined with solar thermal and heat pump.
- 50 % solar thermal coverage of district heat demand
- Development and demonstration of improved solutions for the roof-cover [2] and the HDPE-liner which separates the water body from the soil (see schematic diagram in Figure 5)
- Investigations on possible benefits due to multi-functional use of the storage (e.g. additional storage of excess heat from industries, power plants and biogas plants, Power-to-Heat, etc.)

The HDPE-liner used in Dronninglund has a durability of min. 20 years for temperatures up to 90 °C for one storage cycle (charging and discharging – one year). The construction is described in detail in /5/.

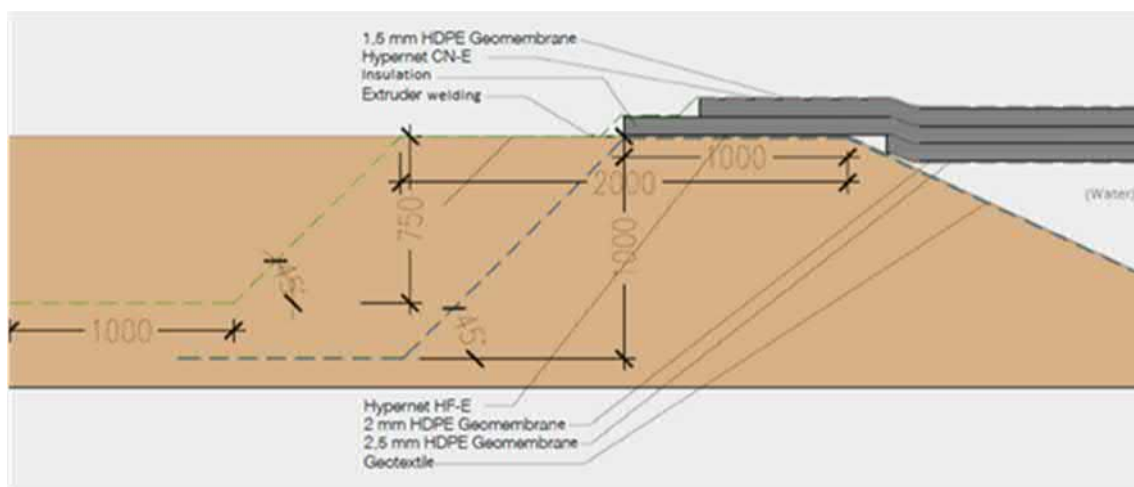


Figure 5: Principle diagram of the pit thermal energy storage and lid design cross section (Source: PlanEnergi from /4/)

One of the major advantages of the pit heat storage is that the cost per m^3 of storage is relatively low e.g. around 40 €/m³. A larger storage than the one in Dronninglund has even achieved lower costs than this (e.g. between 20 and 30 €/m³). The marginal investment cost per m³ is even lower if initial investment costs are disregarded. Hence, if a DH company decides to establish a pit heat storage and considers different size options, then the cost of increasing the volume with an extra m³ can be very low (e.g. in the range of 15-20 €/m³). When considering large scale storages, the investment cost will typically be much lower than steel tank solutions. On the other hand, the initial investment cost of a pit heat storage together with the associated heat losses, makes it unfeasible for smaller storage volumes (e.g. a few thousand m³).

² Problems that occurred in an earlier installation (10,000 m³ pit heat storage in Marstal) should be avoided in Dronninglund. Special focus was given to air pockets under the cover, water pits on the top near the edge, moisture in insulation and degrading of the convection barrier.

4.1.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

Due to uncertain price developments of natural gas but also of limited renewable resources such as biomass the board of Dronninglund district heating decided on a strategy for a future heat supply based on high shares from solar thermal energy. As a consequence, "SUNSTORE 3" project was initiated in 2008 with the objective to design, optimize and implement a full-scale solar district heating plant that is able to cover around half of the present heat demand.

In the framework of a feasibility study, a technical concept including 35,000 m² collector area, 60,000 m³ pit heat water storage volume and a MW-scale heat pump was developed to meet this target. Economic calculations showed that the new system has the potential to stabilize district heating prices in the long run and that consumer heat prices need not to be increased if some of the new equipment is subsidized.

Which stakeholders were involved in the project?

- District heating utility: Dronninglund Fjernvarme A.m.b.A
- Local authority: Brønderslev municipality
- Main entrepreneur: AEA – Averhoff Energi Anlæg A/S
- Technical consultants: Planenergi (DK), NIRAS (DK), Solites (DE)
- Others
 - o Solar collector supplier: Arcon Solar A/S
 - o Excavation, storage: Jakobsen & Blindkilde
 - o Liner work, storage: PBJ Milijoe
 - o DH pipe supplier: Logstor
 - o Entrepreneur, transmission pipes: L&H-Roerby
 - o Electrical installations: Dronninglund EL-Service A/S
 - o Control system: DME A/S
 - o Building: JE BYG APS
 - o Boiler and heat pump: danstoker

The project is subsidized from EUDP (Energy Technology Development and Demonstration Programme), a program financed by the Danish state (administered by the Danish Energy Agency).

Who (what) were drivers and who (what) were opponents (barriers) – and why?

In general, the main driver for the project was the initiative of the local district heating utility (Dronninglund Fjernvarme A.m.b.A).

From a technical perspective, to find suitable placement for a pit heat storage can be challenging because soil and groundwater conditions have critical effects on the costs (e.g. if ground water level is above storage bottom level special structural measures are required).

What have been the main challenges regarding decision finding?

The first design phase ended up with an *electrical* driven compression heat pump with a thermal heating capacity of 3 MW. However, the compression heat pump showed bad economy due to the Danish electricity taxation system. As a consequence, the technical concept was adapted in favor of an absorption heat pump with a heating capacity of 2.6 MW_{th}.

What was finally the crucial parameter for go /no-go decision?

Main arguments were stable heat prices over the system life time (20-30 years) and more flexibility in district heating operation due to the new equipment (solar thermal + seasonal storage + absorption heat pump).

Moreover, it was crucial for Dronninglund district heating that the investment did not increase current end-consumer costs for heat. Financial support was asked from the Danish state-funded *Energy Technology Development and Demonstration Programme* (EUDP). The application was granted due to the innovative approach.

Financing issues:

What have been the main challenges / constraints regarding financing?

One barrier was a financial one concerning taxes on electricity for the electrical heat pump in the project. Therefore, an absorption heat pump was implemented in the project instead of an electric driven heat pump.

Which business model applies to the project?

In general the heat price (and potential future lower heat price) is the main driver for the district heating companies' investments. The production price for heat in Dronninglund has no grants included and capital expenses corresponding average costs for a 20 year annuity loan with an interest of 5% and 2% inflation is 374 DKK/MWh (~ 50 €/MWh). The investor in the project is the DH company in Dronninglund. The heat price today for the consumers is 424 DKK/MWh excl. VAT (~ 57 €/MWh).

All grid and distribution companies in electricity, district heating and natural gas is through the Agreement of 13 November 2012 /6/ required to achieve a number of energy savings annually and report these to the Danish Energy Agency (DEA). The first year's solar heat production could count as such an energy saving. The system includes the opportunity to buy other companies' savings instead of obtaining them. Hence, the surplus savings Dronninglund DH obtained by installing the solar field meant that some of the savings could be sold on the "energy savings stock market".

The main commercial objectives in the EUDP for Dronninglund project were the points below. For each of these it is described how these have been reached in the project /4/.

1. To keep storage costs below 250 DKK/m³ [3]
2. To produce heat at 350-400 DKK/MWh (5 % interest, 2 % inflation, 20 years annuity loan) [4]
3. To store excess heat for 200–250 DKK/MWh [5]

³ Storage costs are 284 DKK/m³ but since the objective of 250 DKK/m³ is from 2008, a price increment of about 14 % is not much more than the cost development in the period.

⁴ The heat production price for the new plant was expected to be as follows: Investment: 14,300,000 €, Capital costs (20 year loan, 3 % real interest): 949,500 €/year, Extra cost, operation: +21,100 €/year, **Total extra cost/year: 970,600 €/year**, Replaced energy production app. 16.300 MWh/year, Production price 59.5 €/MWh; This is prices without subsidies for Dronninglund. Future projects show the announced level of 350-400 DKK/MWh even despite inflation since 2008.

⁵ The cost of the storage is 284 DKK/m³ or 19.2 DKK/m³/year. Operation cost is approx. 100,000 DKK/year or 1.67 DKK/m³/year. Total 20.75 DKK/m³/year. The capacity of the storage is 0.085 MWh/m³ and heat loss 0.027 MWh/m³. Therefore the storage cost will be 20.75 DKK/m³/(0.085-0.027) MWh/m³ or 358 DKK/MWh with one storage cycle and 145 DKK/MWh with two storage cycles. The concept will become increasingly competitive in the event of increased prices for fossil fuels or a decrease in construction and running expenses for the concept. A simple payback time of 10 years will require a 30 % increase in the price of fuel or a similar decrease in construction costs. The most likely would however be a combination of increase in fuel prices and reduction of construction costs. Included in the above prices are normal contribution margins for the enterprises. During the first 3-5 years the combination of solar heating/long term heat storage/electricity regulation have only been established in few places in Denmark, as the planning period for this type of project is 2 years min. and because most CHPs will await the results of the first projects.

Technical issues:

What have been major technical challenges / constraints regarding system design / construction?

The ground water level in the old gravel pit is approx. 3 meters below the bottom of the storage and the soil consists of gravel and sand. This made the implementation easy mainly because rain and ground water did not cause problems. The excavation was ready after two months due to good conditions, and implementation of side and bottom liner took one month. In the middle of June 2013 the water filling could begin.

- The lid is following the water surface when it moves up and down during the year.
- The insulation in the lid is a closed cell polyethylene ("Nomalén" from company Termonova)
- Rain water on the lid is led to a pump well in the middle of the lid. The middle is lower than the edges because of weight pipes (HDPE-pipes with concrete inside) on the lower geo-membrane and the upper geo-membrane in the lid.

Description about the design approach applied:

Which design targets have been set and why?

The goal was to design a plant consisting of solar collectors, a pit heat storage and heat pumps. The goal is for the system to produce at least 50 % of the annual heat demand for heating cost not exceeding 400 DKK/MWh (typical calculation period: 20 years).

Beside from the financial statements above, the following design criteria were decided at the start of the design phase:

- Lifetime > 20 years
- Heat loss from cover: < 0.15 W/(m²·K) (corresponding to 300 mm mineral wool)
- Price level for actual size (10,000 m³): < 67 €/m³
- Price level for larger sizes (> 50,000 m³): < 30 €/m³
- No leakage

One of the commercial objectives in the projects was to store excess heat for 200-250 DKK/MWh.

Which decision steps lead to the retained solution?

1. 2005: Board of Dronninglund district heating decided on a strategy for future heat supply
2. 2007: Nordjyllands Vækstforum (forum for regional business) subsidizes pre-feasibility study for solar district heating project with high solar fraction of 50%
3. 2007: Application for funding "Sunstore 3" project at EUDP
4. 2008: Start of Sunstore 3 project
5. 2009: Technical concept finalized and detail engineering phase
6. 2012: Last approvals of project are given
7. 2013 – 2014: Construction phase (delayed from 2011)
8. May 2014: Inauguration

Which tools have been used during the design phase?

The software and simulation tool TRNSYS has been used in the design phase of the plant to find the optimal solution both in terms of energy production and the economic perspectives. This means that the model was supplied with several inputs of both economic details and energy performances.

The optimum of energy and economic performance have been found in the simulation tool TRNSYS where costs and energy in- and output have been used to optimize the specific parts of the plant in order to combine these in the most feasible way possible.

To find the optimal design a number of variations of some selected parameters were made in order to determine the share of renewables and heat price sensitivity to these. It was for instance seen that the renewable energy share increases with increasing collector area and that the economic optimum (=

the lowest heat price) was found between 35,000 m² and 40,000 m², depending on which funding being used.

What have been the main challenges in the design phase?

The location of the pit storage was a challenge, since the first location of the heat store just north of Dronninglund was problematic due to soil and groundwater conditions (which would entail an estimated additional cost of almost 5 million DKK in ground work alone).

In relation to the grid in the solar field, a new discovery was found, since LOGSTOR has a fixed length of pipes for connecting the collector rows. In Dronninglund the distance between the collector rows was therefore found to 16 m / 3 = 5.33 m to fit the standard piping length. The municipality applied for an extension of the collector field of approx. 2,800 more m² of solar panels. The permission was given before implementation of the solar collectors.

What have been the most crucial interfaces?

The implementation process was delayed from summer 2011 to spring 2013 because of complaints from neighbors concerning the local plan procedure related to the location of the pit storage. It has shown to be important to start the dialogue with both the municipality (regional authority) and the local citizens at an early stage.

The project group decided in consultation with Brønderslev Municipality's Planning Department to move the heat storage into an old gravel pit west of Dronninglund, where there were no problems with groundwater. At this location the solar plant and the central is placed without conflict with planning interests (including edge of forest, monuments etc.)

4.1.4 Lessons learned (barriers and success factors)

What have been major success factors?

A great success factor of the project in Dronninglund is that the concept contributes to realization of Danish energy policy objectives, because it makes it possible to extend the solar fraction in district heating production.

This is seen through several other district heating utilities that now are investigating pit heat storage and solar solutions in future master plans. Some have already been implemented:

- Vojens District Heating has implemented approximately 200,000 m³ pit heat storage combined with 70,000 m² solar collectors.
- Gram District Heating has implemented approximately 122,000 m³ pit heat storage combined with 44,000 m² solar collectors.

Besides that, the marked for pit heat storages is expected to be extended since the storage could also be relevant in systems with waste incineration plants and CHP plants with surplus heat production in the summer period. Some development in the HDPE is still needed when storage at high temperatures (> 90 °C) are needed.

What have been major bottlenecks?

If an electrical driven heat pump is part of the energy system it contributes by offering electricity consumption in periods with cheap export prices (power to heat).

The electrical heat pump was due to Danish electric taxes one of the bottlenecks in the financial part of the project. The electrical heat pump was therefore replaced by an absorption heat pump.

What are the major lessons learned? /5/

Several lessons learned from the project can be used in similar systems in the future:

Issues with reduced capacity of the heat exchanger between solar plant and storage due to dirt in the water and corrosion (probably galvanic and bacterial) in in- and outlet pipes in the storage in the Marstal project were taken into account in Dronninglund where in- and outlet pipes are in stainless

steel, but even then corrosion can occur. Therefore a corrosion expert was consulted and the following precautions were taken against corrosion and to protect the heat exchangers:

- Pipes between solar thermal collector field, seasonal storage and Søndervang (location of heat pump) were cleaned before water was filled in
- Filters were installed to protect the heat exchangers
- In the commissioning phase special attention was paid to (heating) water treatment:
 - o Salts (especially chlorides) were removed with reverse osmosis
 - o As much oxygen as possible was mechanically removed
 - o pH-value of the water was raised to 9.6-9.8 with additives
- During operation the water in the storage is going to be analyzed for content of oxygen, salts, bacteria and pH-value at least annually

4.1.5 Summary

At the time the plant was constructed, it was the largest solar DH plant in the world. The project was innovative because the large solar seasonal storage and heat pump in combination with a CHP plant, which at the time of construction was not seen before. This meant additional challenges, since the CHP and solar heat production has to be scheduled for the daily operation. In return, solar heating, seasonal storage and heat pumps makes the CHP plant a more flexible player at the electricity market, thus facilitating the integration of more fluctuating electricity in the overall energy system.

There is seen a range of advantages in relation to the solar DH plant:

- Solar district heating has the potential to significantly reduce the carbon footprint of conventional district heat supply.
- Increase the flexibility of the plant's role at the electricity market by releasing the engines at CHP plants from forced heat production when it is not feasible. This can help stabilising the electricity grid while integrating more RE (e.g. from wind turbines).
- Security of supply: The delivery of solar heating is safe and there will be no rationing or problems with the delivery of the energy source used for heat production.
- Solar thermal can produce more than 20 times as much heat on one hectare compared to an area used for growing biomass for boilers.
- Stable heat production price from solar DH (only capital costs and minor maintenance and pumping costs).

Due to these reasons, more and more utilities look towards introducing solar heat or increasing the share of solar heat they already have.

4.2 Hybrid solar district heating in the city of Taars, DK

Authors:

Bengt PERERS	Technical University of Denmark, DK	beper@byg.dtu.dk
Simon FURBO	Technical University of Denmark, DK	sf@byg.dtu.dk
Zhiyong TIAN	Technical University of Denmark, DK	zhiytia@byg.dtu.dk
Andreas ZOURELLIS	Aalborg CSP, DK	azo@aalborgcsp.com



Figure 6: Aerial view on the hybrid solar district heating system in the city of Taars (Source: Aalborg CSP). In sum, 5,960 m² flat plate collectors (FPC) and 4,039 m² parabolic through collectors (PTC) are hydraulically connected to the local DH network. In the period 09/2015-08/2016 solar thermal provides a share of 22 % of the entire district heating output of the utility.

Project fact box:**General information:**

Location: **City in Northern Denmark (Jutland), Hjørring Municipality**
 Urban scale of area: **~1km *1km = 100 [ha]**
 Population in the area: **1,895**
 Building mix in the area: **Mainly single-family homes, few multi-storey buildings**
 Plant owner: **Consumer-owned cooperative with limited liability (Taars Varmeværk A.m.b.A)**

Specific information about Taars Varmeværk A.m.b.A:

Heated (gross) floor area (supplied by district heating): **126,000 m² (2015/16)**
 Final thermal energy consumption (heat generated, incl. thermal losses): **18,583 MWh (2015/16)**
 Useful thermal energy consumption (heat sold): **14.189 MWh (2015/16)**
 Network heat losses: **4,394 MWh/a (23.6 %)**
 Heating grid trench length: **13 km (service pipes not included)**
 No. of building substations: **approx. 850**
 Supply/Return temperature levels: **Supply 68-78°C, return 38°C**
 (Thermal) energy supply technologies: **N-Gas CHP (5.2 MW_{th}/5.0 MW_{el}), 2 N-Gas boilers (6.0 and 2.9 MW_{th}), solar thermal (6.7 MW_{p,th})**

Specific information about the solar thermal part:

Solar thermal collector area: **10,000 m²_{aperture}**
 Flat plate collector (FPC) field: 6,419 m²_{gross} / 5,960 m²_{aperture} (473 panels)
 Parabolic through collector (PTC) field: 4,040 m²_{aperture} (60 modules)
 Thermal energy storage: **Two (unpressurized) storage tanks with a total of 2,430 m³**
 Annual solar energy yield: **4,060 MWh (FPC: 2,650 MWh, PTC: 1,410 MWh) (2015/16)**
 Solar fraction: **22% (based on heat generated resp. final DH output)**
 Specific annual solar energy yield: **406 kWh/ (m²_{aperture}·a), (measured 09/2015-08/2016)**

Economics of the solar thermal part:

Total project cost: **3.5 M EUR (excl. VAT); grant/funding (excl. VAT): 0.4 M EUR (11.3%)**

<i>FPC collector field incl. foundations</i>	42 %
<i>PTC collector field incl. foundations</i>	34 %
<i>Solar energy storage tanks incl. foundation</i>	0 % (existing)
<i>DH pipes, pumps, heat exchangers, control, etc.</i>	15 %
<i>Land, ground work</i>	5 %
<i>Consulting / engineering</i>	4 %

4.2.1 Introduction and description

History of Taars district heating

Taars Varmeværk A.m.b.A is situated in Northern Denmark (Jutland, Hjørring Municipality) and was established in 1960 as a consumer-owned cooperative with limited liability. Heat generation was first based on heavy fuel oil boilers which were replaced by two N-Gas boilers with 6.0 resp. 2.9 MW_{th} as well as an N-Gas CHP with 5.2 MW_{th} / 5.0 MW_{el} in the early 1990s. Additionally, two non-pressurized thermal energy storage tanks with a water volume of 2,430 m³ each for load balancing and optimized CHP operation according to electricity prices were installed at that time.

In 2014 the board of Taars Varmeværk A.m.b.A decided to substitute a significant share of natural gas for district heating by solar thermal. The idea for a hybrid solar district heating system combining concentrating and non-concentrating solar thermal collector technologies was born in talks together with the Danish turn-key concentrating solar thermal system provider Aalborg CSP. The new Taars hybrid solar district heating system finally was commissioned in July 2015 (see hydraulic scheme in Figure 7). By end of 2016, the district heating utility supplies around 850 consumers via 13 km of district heating network. In the period 09/2015-08/2016 solar thermal provides a share of 22% of the entire district heating output of the utility.

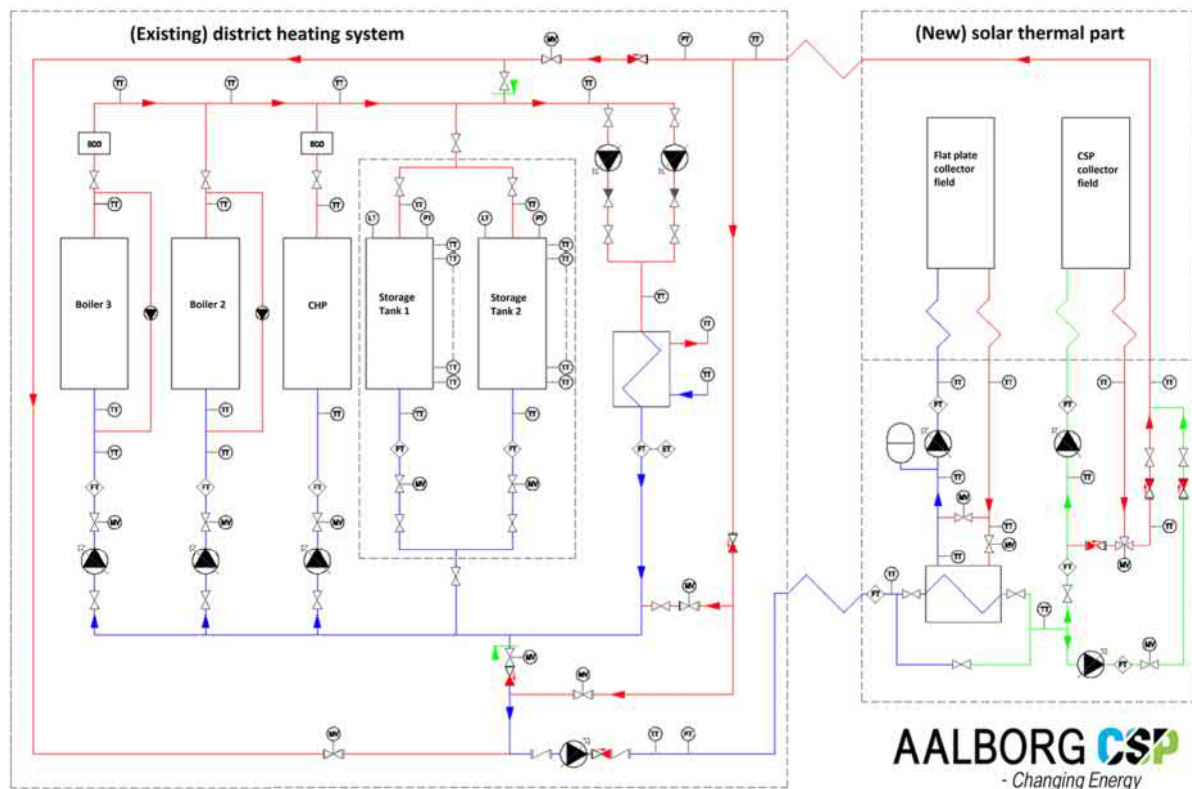


Figure 7: Taars District heating schematic diagram including new hybrid solar thermal collector field (Source: Aalborg CSP)

4.2.2 Technical description of the concept and innovative approaches

Working principle of the hybrid solar district heating concept

The Taars hybrid solar district heating system is the first project around the world, where a combination of concentrating parabolic through collectors (PTC) and non-concentrating flat plate collectors (FPC) is hydraulically connected to a district heating network. The idea behind is to first use the FP collectors at lower temperatures to preheat the district heating return flow (from around 40°C

up to 70°C) and boost the temperature up to 95°C with the PT collectors afterwards (see schematic diagram in Figure 8).

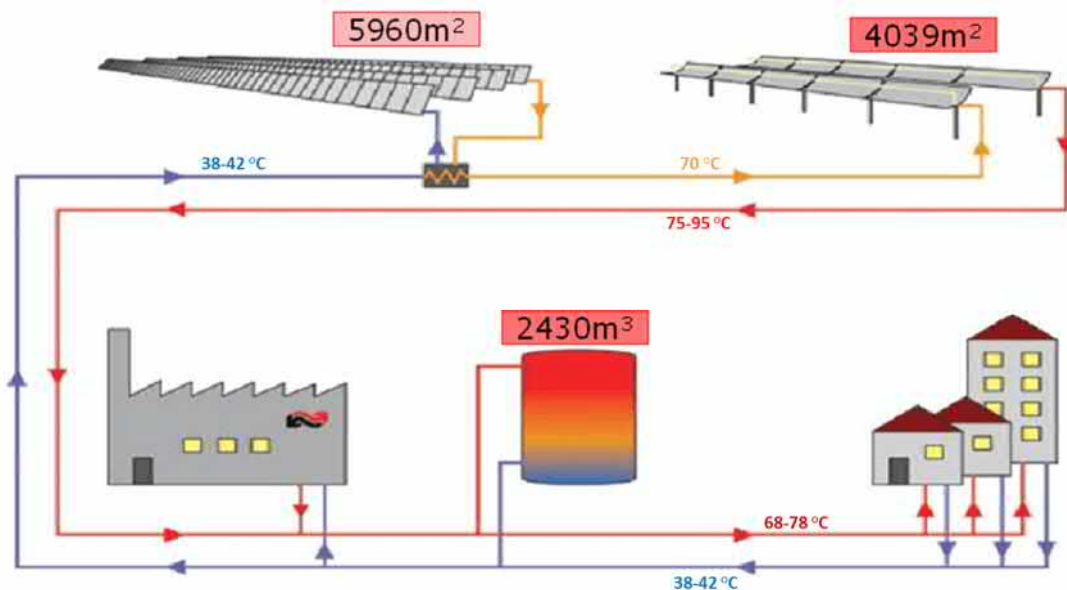


Figure 8: Principle diagram of the Taars hybrid solar district heating system (Source: Aalborg CSP)

In detail, the flat plate collector field consists of two different kinds of collectors from Danish company Arcon-Sunmark A/S – first half of the field is equipped with collectors optimized for lower temperatures ($HT_{HEATboost}$ 35/10) and second half is equipped with advanced flat plate collectors with reduced thermal (convection) losses ($HT_{HEATstore}$ 35/10) for higher temperatures (in case of Taars up to around 70°C). For even higher output temperatures of up to 95°C the parabolic through collector field is serial connected to the flat plate collector field. Parabolic through collectors were delivered by Danish company Aalborg CSP.

Combining the different solar thermal technologies has several advantages: First, each collector type is operated at temperature levels where highest efficiencies are possible (FPC are more efficient at lower temperatures than PTC). Second, the entire system may be actively prevented from overheating / stagnation by means of defocussing the parabolic throughs from the sun [6] and third, the daily solar thermal production profile may be evened out due to different solar thermal collector orientation (FPC are south oriented and hence produce most at noon whereas PTC are tracked from east to west for higher gains before and after noon).

For freeze protection, the flat plate collector loop is filled with a water-glycol mixture (40%). By contrast, in the parabolic through collector field only district heating water is filled (and hence no glycol, glycol pump, control valves, expansion tank, glycol loop control and heat exchangers are needed here). In order to avoid freezing, district heating return water is circulated in the PTC loop if the outdoor temperature drops close to, or below the freezing point. Due to the highly efficient insulation of the PTC vacuum tube absorbers (working principle of a thermos flask) very little energy for freeze protection is needed (measurements by DTU [5] showed, that freeze protection amounts to around 1% of annual PTC output which is comparable to performance losses in a flat plate collector field caused by the water/glycol mixture with additional heat exchanger).

⁶ See IEA SHC Task 49 technical report A.1.2. on Overheating prevention and stagnation handling in solar process heat applications for further information regarding the phenomenon of stagnation in solar thermal applications and strategies for its handling.

4.2.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

District heating is the most common heating technology in the Danish residential sector. However, the majority of district heating systems installed today are equipped with N-gas based CHP engines and economy of those systems got significantly reduced in the past years as electricity prices, especially in summer, decrease constantly. For the board of Taars district heating this was a major reason to react and to look for possibilities to reduce its N-gas consumption. Solar thermal was chosen to be an appropriate technology option because it is a mature and proven technology in Denmark concerning cost performance, reliability and life time.

Which stakeholders were involved in the project?

- District heating utility: Taars Varmeværk A.m.b.A
- Local authority: Hjørring municipality (Role: approval of project)
- Main Entrepreneur: Aalborg CSP A/S
- Technical consultants: JPH Rådgivning
- Other
 - o Flat plate collector supplier: Arcon Solar A/S
 - o Parabolic through collector supplier: Aalborg CSP A/S
 - o Pipe supplier: Isoplus A/S
 - o 3rd party: Technical University of Denmark (DTU)

Who (what) were drivers and who (what) were opponents (barriers) – and why?

Major driver for the investment in the new solar thermal system was the lower cost per kWh for the district heating customers compared to the existing (N-gas based) system.

One reasons to go for the hybrid system was increased security of operation due to automated stagnation management (in situations where solar production may exceed heat demand and storage capacity, boiling of the system is simply avoided by defocussing the parabolic through collectors). In addition, outlet temperature from the PTC field may be controlled very accurately.

By contrast, barriers to overcome were linked to lacking experience and hence lacking confidence with parabolic through collector technology.

What have been the main challenges regarding decision finding?

The PTC technology was new and less proven than flat plate collector fields.

What was finally the crucial parameter for go /no-go decision?

Lower cost per kWh of district heat for the final customer compared to the existing system (calculated over system life-time).

Financing issues:

What have been the main challenges / constraints regarding financing?

The “bankability” (to get loans) of a solar heating plant has been a major challenge in Denmark as well in the past. The situation improved significantly due to the large number of well performing, robust and reliable solar district heating applications installed today.

In Taars, “bankability” was not an issue. However, it was required to prove in calculations / simulations that the economic performance of the new district heating concept is better than the existing one.

Which business model applies to the project?

The turn-key solar thermal system was sold to the local district heating company (which is owned by the local DH customers). A more stable, reduced long term cost of district heating energy for the final customers/owners was offered.

Technical issues:*What have been major technical challenges / constraints regarding system design / construction?*

- The control strategy of serial connected collector fields for different collector technologies, hydraulic design and orientation
- Optimum charging strategy of the existing energy storage tanks in order to utilize solar thermal output best (especially high temperatures from the PTC). There is still potential for improvements in this regard and optimization is on-going here.

Description about the design approach applied:*Which design targets have been set and why?*

The utility wanted to substitute around 30% of its natural gas consumption with solar thermal which is a high value for a system with short-term (diurnal) storages only (typical solar fractions in Danish SDH systems with diurnal storage range from 5-20%). However, this target was achieved by means of slightly oversizing the system. In times of surplus production (summer) the parabolic through collectors are simply defocussed.

Second design target was to achieve lower levelized cost of heat with the new system compared to the existing system (N-Gas boiler + CHP).

Which decision steps lead to the retained solution?

Despite a series of publications /1/, /3/, /4/ and promising pilot experiments /2/ confirmed competitive thermal performance of PTC in Danish climate, the technology seemed to be too unproven for Taars district heating at first. Finally, the combination with FPC turned out to be an attractive compromise with positive synergies for solar thermal system operation and performance. Moreover, it could be shown in simulations that the new system with solar thermal is competitive with the existing N-gas based system in terms of levelized cost per kWh of heat. Especially the latter was decisive for the investment in this solar thermal solution by the DH utility.

Which tools have been used during the design phase?

For the design and energy calculations of the PTC Aalborg CSP used a company-internal tool based on MS Excel.

The techno-economic performance of the entire system (solar thermal systems including storage) was analyzed and optimized applying an adapted TRNSYS-GenOpt model. The calculations showed that there was a positive synergy in combining PTC and FPC collectors: Although the present cost per m² of PTC is higher than for FPC, the total energy cost is reduced by installing both technologies considering positive synergies as already explained. The TRNSYS-GenOpt model is based on individually validated component models and empirical collector parameters. Meanwhile, the simulation model has been validated with annual measured data from the plant /5/. The experience of the Taars solar heating plant can be used to develop and optimize new large solar heating plants.

What have been the main challenges in the design phase?

- Mix of different (concentrating and non-concentrating) solar collector technologies
- The lack of measured DNI (direct normal irradiation) data in Denmark (PTC can only convert direct irradiation and hence this information is crucial for both system design and system operation strategies).

What have been the most crucial interfaces?

The cooperation between the two turn-key solar thermal collector companies (FPC and PTC) showed potentials and synergies on the one hand side but on the other hand side the two companies are competitors, especially on the Danish market, which makes communication processes difficult.

4.2.4 Lessons learned (barriers and success factors)*What have been major success factors?*

- Professional planning, design and construction of the system
- High competence with solar thermal and hydraulic system design of the involved companies
- The DH users invest in the solar plant themselves (principle of a consumer-based co-operative) which shows that solar thermal is a trusted and highly accepted technology

What have been major bottlenecks?

- Extreme weather during the plant construction in winter was challenging for punctual delivery of the project. However, the project was delivered on the agreed time schedule.
- The customer was unfamiliar with the PTC technology.

What are the major lessons learned?

The combination of parabolic through collectors and flat plate collectors connected in series, gives a positive synergy for the whole system performance and cost due to:

- Better overall economy and operational advantages by more even energy production over the day (PTC produce more heat in the morning and evening while FPC peak at midday)
- Built in overheat protection by defocusing the PTC collectors
- The tracking axis direction/azimuth can be adjusted quite freely from due North-South, to even out the daily profile with only minor loss in annual performance.

The plant operator needs special education to utilize the PTC high temperature possibilities best (e.g. in order to increase storage capacity the energy storage tanks may be charged with higher temperature heat from the PTC collector field than used to).

The design of the solar thermal system size targeting 30% solar fraction was proven to work as expected. In the first year of operation a solar fraction of 26% (referring to entire district heating production) resp. 28.6% (referring to heat sold) was achieved. This high solar fraction is reached by efficiently using the existing energy storage tanks only (no new storage capacity was installed). To achieve these high solar fractions without additional energy storage capacity built, the solar thermal system is slightly oversized. As a consequence, surplus production in summer is avoided by defocussing the PTC from time to time [7].

4.2.5 Summary

Modern parabolic through collectors with vacuum tube absorbers perform excellent also at high latitude locations like in Denmark. As an added value for district heating operators PTC technology increases operation safety because overheating/stagnation may be effectively avoided by defocussing the mirrors from the sun. With the overheating/stagnation problem solved, solar thermal systems can be designed for higher solar fractions (in case of Taars: 30%) without installing additional solar energy storage capacity (in Taars existing diurnal storages for load balancing are used as solar energy storages). Another advantage linked to PTC technology is that the tracking axis may be easily adapted over the day and also in the course of the year. In combination with flat plate collectors this enables a more even solar output in the course of a day which makes it easier for the boilers / CHP unit to react and saves cost in equipment due to reduced peak loads.

⁷ A detailed analysis of the solar thermal system operation and performance (including monitoring data from one year of operation) was done by DTU and is documented in /5/.

4.3 Solar-assisted urban quarter “Salzburg-Lehen”, AT

Norbert DORFINGER	Salzburg AG für Energie, Verkehr und Telekommunikation	norbert.dorfinger@salzburg-ag.at
Inge STRASSL	SIR - Salzburg Institute for Regional Planning and Housing	inge.strassl@salzburg.gv.at
Franz MAUTHNER	AEE - Institute for Sustainable Technologies	f.mauthner@aee.at

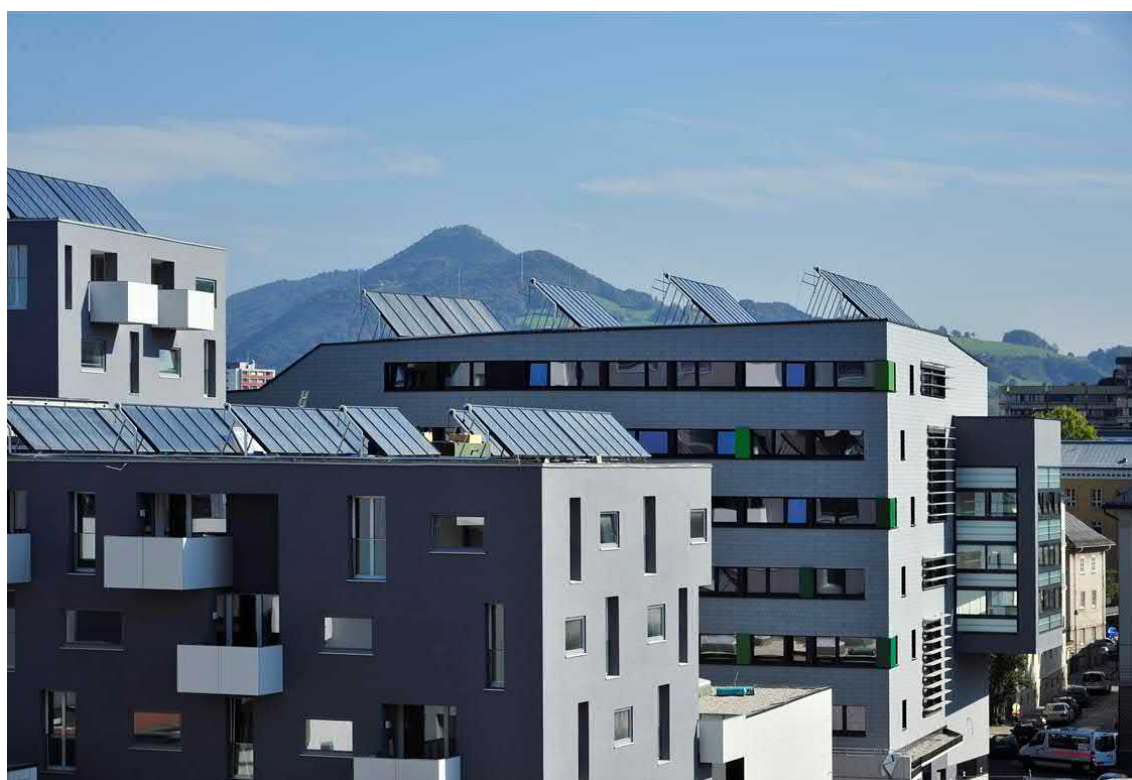


Figure 9: Aerial view on Northern part of the urban quarter “Stadtwerk Lehen” (Source: top: AEE INTEC, bottom: Fotohof). In sum, 2,048 m² solar thermal collectors are split into 13 roof-mounted collector fields and roughly supply 25% of the final thermal energy demand (incl. network heat losses) of the buildings with a heated floor area of 48,860 m².

Project fact box:**General information:**

Location: Salzburg district of „Lehen“, Austria

Urban scale of area: 42,000 m²

Population in the area: N/A

Building mix in the area (kind of building category in % of heated floor area):

19,000 m² of laboratory, ordination and office space (38.9%)

20,620 m² of subsidized housing (42.2%)

3,030 m² student residence (6.2%)

1,000 m² cultural and social facilities (2.0%)

5,000 m² shops and other housing (10.2%)

Heat consumer characteristics in the area: 100 % medium size consumers (80-800 MWh/a)

Plant owner: public

Specific information:

Heated (gross) floor area: approx. 48.860 m²

Final thermal energy consumption (incl. network heat losses): 3,975 MWh (measured, 2013/14)

Useful building thermal energy consumption (heat sold): 3.575 MWh (measured, 2013/14)

Network heat losses: approx. 400 MWh/a (10%)

Heating grid trench length: 680 m

No. of building substations: 20

Supply/Return temperature levels: 65/35 °C (designed); 65/35-45 °C (measured)

(Thermal) energy supply technologies: District heating (1.8 MW_{th}), Solar thermal (1.3 MW_{p,th}), Compression heat pump (160kW_{th})

Specific information about the solar thermal part:

Solar thermal collector area: 2,048 m²_{gross} / 1,855 m²_{aperture}

Thermal energy storage: 200,000 liters (pressurized steel tank)

Annual solar energy yield: 989 MWh (measured, 2013/14)

Solar fraction: 25% (based on final thermal energy consumption)

Specific annual solar energy yield: 533 [kWh/(m²_{aperture}·a)] (measured, 2013/14)

Economics figures:

Total building project: ~ 42 M EUR (excl. VAT) / ~ 2.3 M EUR subsidies from EU

Solar heating system: ~ 0.9 M EUR (excl. VAT) / ~ 0.4 M EUR subsidies from government

4.3.1 Introduction and description

Urban quarter Stadtwerk Lehen

From 2011 to 2016, a new residential area with a total of 287 dwellings in nine buildings as well as a student dormitory and a kindergarten was built in the Salzburg district of „Lehen“ (Figure 10, yellow and green area). The two- to eight-storey buildings were designed to meet lowest energy building standards ($4\text{--}18 \text{ kWh/m}^2_{\text{GFA/a}}$) and are equipped with air ventilation including heat recovery. Moreover, in the Southern part of the quarter several new low-energy buildings for commercial use (laboratory, ordination and office space as well as shops and social facilities) were erected and an existing 10-storey office building was renovated (Figure 10, red area). In sum, the area comprises a gross floor area of approx. $48,650 \text{ m}^2$.

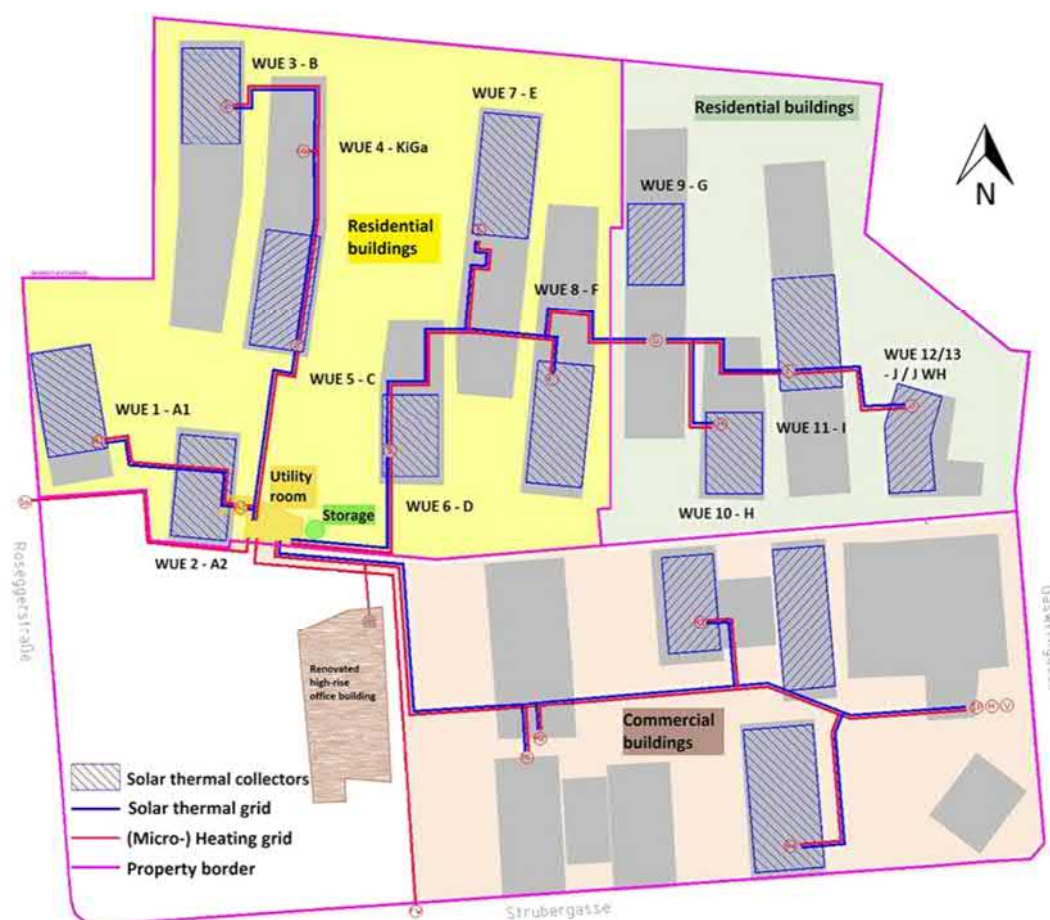


Figure 10: Site plan Stadtwerk Lehen (Source: adapted from EGS-plan). North: new built housing area; South: new built commercial area and renovated high-rise office building.

Heat supply

For the supply with thermal energy all buildings are connected to a low-temperature (65/35) heating grid (micro-grid) that serves a 2-pipe building distribution network with local heat transfer stations for space heating and domestic hot water preparation. The annual consumption of thermal energy (final energy including transmission losses) was measured to be $3,975 \text{ MWh}$ in the period Aug13-Jul14.

Roughly one quarter of the thermal energy for the supply of the buildings is provided by a solar thermal system. Therefore, $2,048 \text{ m}^2_{\text{gross}}$ ($1,855 \text{ m}^2_{\text{aperture}}$) flat plate collectors ($1.3 \text{ MW}_{\text{th,p}}$) split into 13 separate collector fields are installed on building flat roofs (Figure 10) and feed into a 200 m^3 central thermal energy storage (Figure 11).

Additionally, a compression heat pump with a heating capacity of $160 \text{ kW}_{\text{th}}$ is hydraulically connected to the energy storage utilizing the lower storage part as heat source while charging the upper storage part.

Heat pump operation enables temperatures down to 10°C in the lower part of the energy storage which has several positive effects on the entire system efficiency: On the one hand, storage capacity is increased meaning that with similar storage volume more energy can be stored (higher ΔT). Second, average storage temperature is decreased which decreases thermal energy storage losses and third, efficiency of the solar thermal collectors is increased due to lower operating temperatures. District heating serves as auxiliary heating system and backup (Figure 12).



Figure 11: 200 m^3 energy storage tank
(Source: Fotohof)

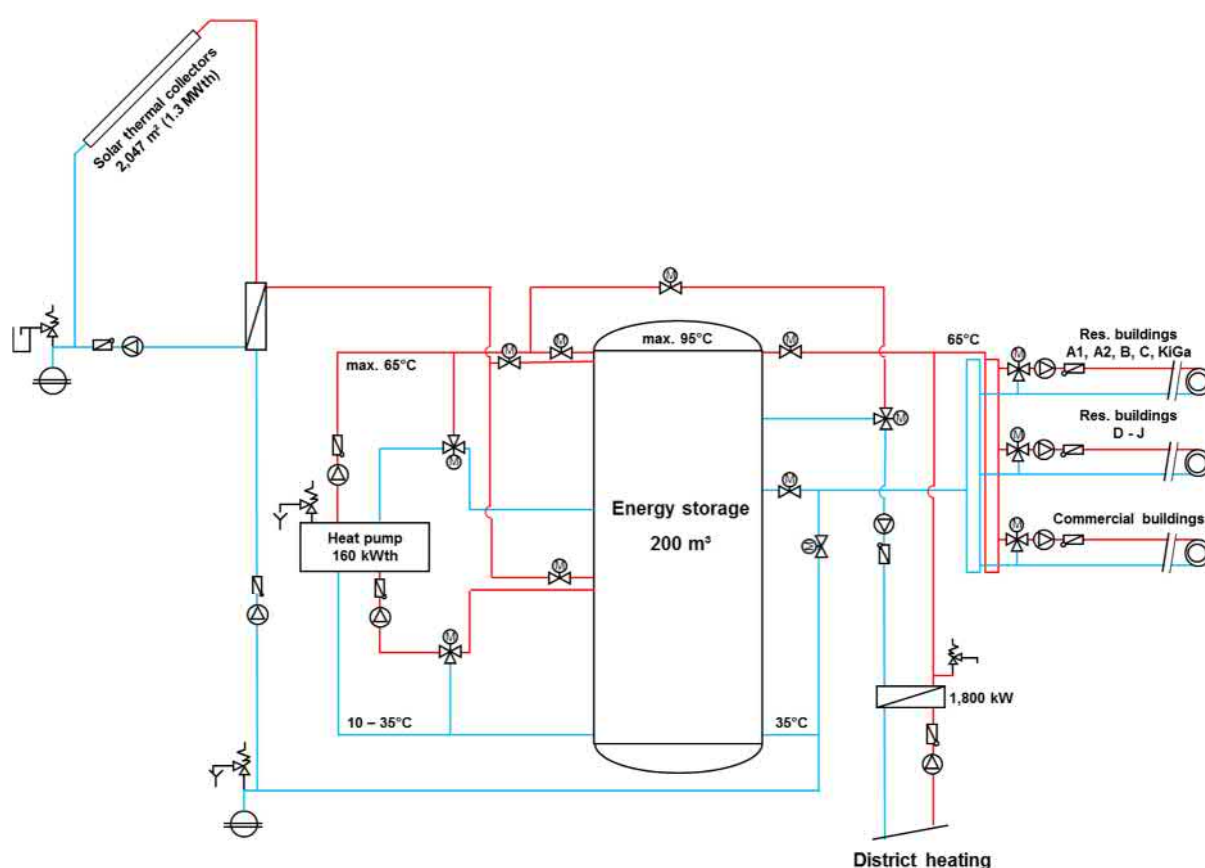


Figure 12: Hydraulic scheme of the heat supply system Stadtwerk Lehen (Source: AEE INTEC)

4.3.2 Technical description of the concept and innovative approaches

The heat supply concept for the new urban quarter was part of an integrated urban planning process. From the very beginning, focus was given to both high energy efficiency and low-carbon energy supply. The decision finding process ended up in the prioritization of a low-temperature ($65/35^\circ\text{C}$) heat supply

and distribution system with a high share (>25%) of solar thermal energy in the heat supply. As city district heating is attached close to the new urban quarter it was also decided to use this energy source as auxiliary system. With this basic technical boundaries decided it was possible to design the heat supply and distribution system in detail from conversion to end-user stage and very notably, to identify and occupy space for installing the solar thermal collectors as well as the energy storage tank in an early project stage.

In a later optimization step in the design phase it was decided to hydraulically attach a compression heat pump to the energy storage tank in order to increase storage capacity (and hence reduce its size) and solar thermal efficiency.

The concept was finally realized and proven to work satisfying in the framework of a scientific monitoring program: On the one hand side solar energy yields could be significantly increased due to heat pump operation at hours with low solar irradiation. In the period Aug13-Jul14 specific annual yield of $533 \text{ kWh}/(\text{m}^2_{\text{aperture}} \cdot \text{a})$ was measured which was 25% higher than projected. On the other hand specific storage volume could be kept relatively low (100 liter per m^2 collector area installed) compared to the solar fraction achieved (25%). Seasonal performance factor of the heat pump was always between four and five.

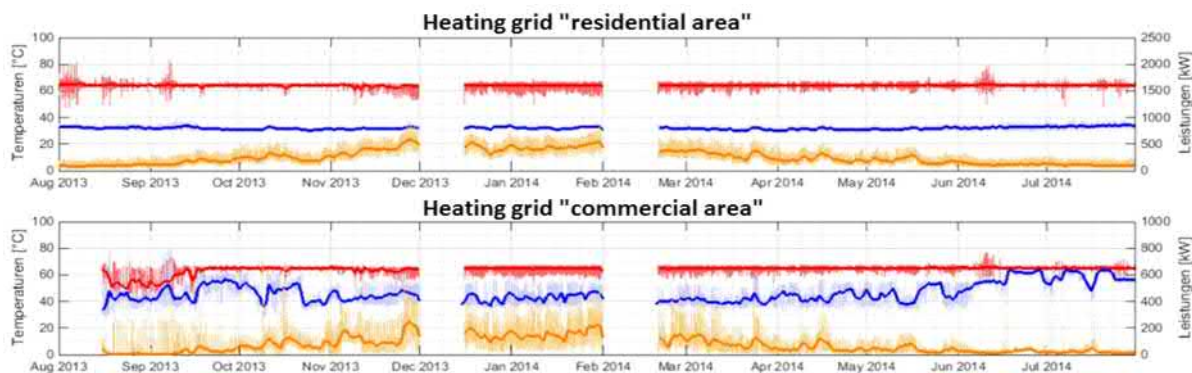


Figure 13: Measured micro-grid supply (red lines) and return (blue lines) temperatures as well as capacities (yellow lines) in the Northern (residential area) resp. Southern (commercial area) part of the supply area (Source: AEE INTEC)

Sensitive parameters of the entire technical concept especially refer to the supply and return temperatures in the micro-grid (Figure 13). While the design temperatures of 65/35°C could be well achieved in the Northern part of the quarter (residential buildings) higher return temperatures of 40-45°C were measured in the Southern part (commercial and retrofitted buildings). Since all temperatures are mixed again in the energy storage this should be avoided, e.g. by proper hydraulic balancing.

4.3.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

Large fallow area in the city center was decided to become revived by means of a new residential and commercial area. The idea for a solar-assisted micro-heating grid in close distance to an existing district heating supply area evolved due to the availability of promotion schemes for solar thermal in combination with newly constructed buildings (in Salzburg, housing subsidies incentivize the implementation of renewable technologies).

Which stakeholders were involved in the project?

- Non-profit real estate developers (GSWB and Heimat Österreich)
- Commercial real estate developer (Prisma)
- Regional Multi Utility Company (Salzburg AG für Energie, Verkehr und Telekommunikation)
- Several city council departments (a.o. town planning, residential building research)
- Salzburg Institute for Regional Planning and Housing (SIR)

Which resources were available before the project?

- Strong participation and intervention by local administrative facilities and overall good co-operation between involved actors
- Dedicated individuals with high specific expertise

Who (what) were drivers and who (what) were opponents (barriers) – and why?

On the one hand several important stakeholders joined forces in order to come up with a commonly accepted solution. On the other hand subsidies have been enablers for innovative approaches and investments, specific research and monitoring (EU funding from the Concerto initiative, national R&D funding, housing subsidy scheme of the state Salzburg).

Barriers to overcome have been high initial investment costs (compared to standard solutions) as well as time-consuming and partly complicated modalities linked to the subsidy schemes.

What have been the main challenges regarding decision finding?

Contracting (especially handling of risks linked to pre-financing, accounting, property limits, operation management, funding allocation)

What was finally the crucial parameter for go /no-go decision?

A **quality agreement** signed by all involved parties as well as the signed Concerto project contract made decisions transparent and binding.

Financing issues:

What have been the main challenges / constraints regarding financing?

- Contracting among the partners
- Implementation of technical innovations within the cost ceilings in building construction

Which business model applies to the project?

- “**Wärme-Direkt-Service**”: Heat customers are supplied with heat including service and operation of the whole distribution system (including installation in the flat) for a basic rate per m² useful area plus an energy rate per kWh.

Technical issues:

What have been major technical challenges / constraints regarding system design?

- Allocation of appropriate roof areas as well as architectural implementation of the large distributed solar thermal collector fields
- Interface roof (erection of the solar thermal collector fields by the energy supplier on the roofs of the buildings owned by the real estate developers)
- Hydraulic set-up, control and operation of the storage-integrated compression heat pump

Description about the design approach applied:

Which design targets have been set and why?

Superior target was to design and implement a highly energy efficiency and low-carbon energy heat supply for the new urban quarter Stadtwerk Lehen. More specifically, it was decided to implement a solar-assisted micro-heating grid in close distance to the existing district heating supply area which should meet optimum cost-performance targets (and hence should result in lowest possible cost of heat for the future residents).

Which decision steps lead to the retained solution?

1. Idea for a solar-assisted low-temperature micro-heating grid backed up by district heating and with storage integrated heat pump was brought in by a technical consultant
2. Consensus amongst all stakeholders regarding the technical concept was obtained
3. Quality parameters and criteria for the project were defined and added to the quality agreement document
4. Applications for subsidies on investment for innovative technologies, project-specific R&D as well as monitoring were handed in (EU Concerto initiative, national R&D promotion scheme, Salzburg state subsidies scheme on housing developments)
5. Establishment of a control group in which the essential decisions and information are communicated and reconciled on a monthly basis
6. Accompanying quality assurance on the basis of the quality agreement and the EU contract (SIR)
7. Technical simulations, scientific accompaniment and monitoring by external scientific partner (Steinbeis Institute, Germany)
8. Further engagement and interventions by the City of Salzburg as well as by the multi utility company (Salzburg AG) to expand the project area to the adjoining renovation area

Which tools have been used during the design phase?

- Simulation tools of the energy consultants and scientific partners
- control group meetings
- quality agreement combined with quality assurance measures

What have been the main challenges in the design phase?

- To identify and bring together all necessary stakeholders and actors
- Communication and decision-making processes

What have been the most crucial interfaces?

- utility ⇔ real estate developer
- real estate developers ⇔ politics
- A coordinator was appointed by the city of Salzburg (secretary of the planning town council)
- Accompanying quality assurance by SIR ⇔ EU project

4.3.4 Lessons learned (barriers and success factors)

What have been major success factors?

- Setting up a quality agreement
- EU project with liabilities
- The common will
- Common tender
- Good communication amongst stakeholders and implementation of a control group

What have been major bottlenecks?

- Financing (pre-financing with uncertainties) and Contracting
 - o Contracts were necessary before tendering which led to
 - o Tough contractual negotiations
- The interface roof (who is to blame for leaks...)

What are the major lessons learned?

- Clear targets at the beginning and a moderated process with quality assurance and clear responsibilities are prerequisites
- Political will and support are very conducive
- Reconciliation Interface Roof → Construction of the collectors, if possible by the real estate developers themselves (liability questions...)

4.3.5 Summary

The case of **Stadtwerk Lehen** is a very successful example of an integrated urban planning process with many involved stakeholders who agreed upon an efficient and low-carbon energy supply system. Based on a superior target (high efficiency, high share of RES, district heat as auxiliary service) the design of the heat supply system was matched to the design of the new and renovated buildings and vice versa in a very early project stage. This approach favors holistic urban planning and leads to optimal energy system designs.

From a technical point of view, the realized technical concept was proven to work very satisfying. Low temperatures in the heating grid together with heat pump operation enabled above-average solar energy yields and high solar fractions. Meanwhile three more similar systems with storage-integrated heat pumps were built in social housing projects in Salzburg based on the “Stadtwerk Lehen” best-practice example.

From an organizational point of view the challenge was to reach consensus between various stakeholders with quite different background and responsibilities. In this respect, a coordinated, moderated and in a later stage contractually binding procedure with accompanying quality assurance was proofed to be a successful approach for this project. Moreover, applying for subsidies and participation in R&D projects (European, national and state initiatives) helped to deeply analyze and proof innovative (out-of-the-box) ideas, to co-finance new technologies and to disseminate achievements to a broader audience.

4.4 Solar-assisted urban quarter “Freiburg-Gutleutmatten”, DE

Authors:

Sebastian Herkel	Fraunhofer ISE, DE	sebastian.herkel@ise.fraunhofer.de
Mehmet Elci	Fraunhofer ISE, DE	mehmet.elci@ise.fraunhofer.de
Axel Oliva	Fraunhofer ISE, DE	axel.oliva@ise.fraunhofer.de
Alexander Ripka	badenovaWÄRMEPLUS GmbH & Co. KG, DE	alexander.ripka@badenova.de



Figure 14: View on Eastern part of the urban quarter “Gutleutmatten” (Source: Fraunhofer ISE). In sum, 2,220 m² solar thermal collectors are split into 38 roof-mounted collector fields. The solar thermal system is designed to supply around 24% of the final thermal energy demand (incl. network heat losses) of the new buildings with a heated floor area of approx. 40,000 m².



Figure 15: View on collector array of the largest plant in the urban quarter "Gutleutmatten" as well as the piping-system of the heat network. (Source: Fraunhofer ISE, badenovaWÄRMEPLUS GmbH & Co. KG)

Project fact box:**General information:**

Location: **Gutleutmatten in Freiburg i. Br., Germany**

Urban scale of area: **81,500 m²**

Population in the area: **1,500**

Building mix in the area: **Multi-storey (three to nine) residential buildings**

39.000 m² residential (98%)

1,000 m² cultural and social facilities (2.0%)

Heat consumer characteristics in the area: **100 % medium size consumers (80-800 MWh/a)**

Plant owner: **public owned private utility**

Specific information:

Total gross floor area: **57,000 m²**

Heated floor area: **approx. 40.000 m²**

Final thermal energy demand (incl. network heat losses): **approx. 2,900 MWh (design value)**

Useful building thermal energy demand: **2.600 MWh (design value)**

Network heat losses: **approx. 300 MWh/a (10%) (design value)**

Heating grid trench length: **1,540 m**

No. of building substations: **38**

Supply/Return temperature levels: **75/40 °C (heating network design temperatures)**

(Thermal) energy supply technologies: **N-Gas CHP (600 kW_{el}/654 kW_{th}), N-Gas Boilers (4,000 kW), Solar thermal (~ 1.400 kW_{p,th})**

Specific information about the solar thermal part:

Solar thermal collector area: **2,200 m²_{gross} / 1,990 m²_{aperture} (38 roof-mounted systems of between 7 and 145 m²)**

Thermal energy storage volume: **177 m³ (split into 38 units of up to 15 m³)**

Annual solar energy yield: **780 MWh (design value)**

Solar fraction: **30% (based on useful building thermal energy demand)**

Specific annual solar energy yield: **390 kWh/ (m²_{aperture}·a) (design value)**

Economics figures:

Total building project: **≈ 120 MEUR (excl. VAT)**

Total cost of heating system: **≈ 3.25 MEUR (excl. VAT); grant/funding: 2.95 M EUR (20.2%)**

Solar thermal collector field + piping + storage + control 53.8% (1.75 MEUR)

Building heat transfer stations 4.6% (0.15 MEUR)

Heating grid 16.4% (0.8 MEUR)

Ancillary construction costs, other costs 6.2% (0.2 MEUR)

Consulting / engineering / R&D 10.8% (0.35 MEUR)

4.4.1 Introduction and description

The new development area “Gutleutmatten”, with 500 households, 40,000 m² living area and a heat demand of approximately 2,600 MWh/a, will be constructed in Freiburg between 2013 to 2018, within the framework of the inner-city development. Within the scope of this project, a decentralized solar thermal system will be integrated to a heat supply system based on a Combined Heat and Power (CHP) district heating system. The operation of the CHP will be optimized so as to seek the best possible interaction with the electricity network and aiming to minimize the distribution losses of the local heating network. Key topic of the concept is to implement innovative operational management, and to deduce overall rules to the long-term perspective of solar thermal heating in similar urban districts. The main innovative objective of this heat supply system is to realize an innovative integration of solar thermal systems in the local heating network which reflects the availability and cost of space in dense urban environments. The approach is a decentralized coupling of the solar thermal system which aims to shut down the operation of the local heating network for a sum of at least 3 months during summertime.



Figure 16: Development area Gutleutmatten in Freiburg i. Br. incl. principle diagram of the hydraulic solar thermal integration to the local heating grid (Source: City planning office Freiburg i. Br., Fraunhofer ISE, badenovaWÄRMEPLUS GmbH & Co. KG)

4.4.2 Technical description of the concept and innovative approaches

Combined heat and power (CHP) district heating systems are a reasonable and well established solution to meet a residential area's energy demand. While the produced heat is used to provide the buildings' space heating and domestic hot water (DHW) requirements, often the generated electricity is fed into the grid at a fixed tariff. In future, the income from this supplied electricity is expected to depend on the national residual load – the load that remains after national photovoltaic (PV) and wind turbine power has been fed in – and hence be coupled with the electricity prices at the European Energy Exchange. One promising technical solution to adapt the operation of conventional CHP district heating systems is to enhance the scheme with decentralized solar thermal collectors. Due to the correlation of PV power and solar heat production, at periods when there is a low residual load due to PV power, solar heat can be used to meet the heat demand, whilst the CHP district heating system will temporarily be decommissioned. Thus this solution is improving both the thermal performance by reducing heating network losses due to the decommissioning and a better adaptation of CHP operation to the electricity market.

The heat supply concept for “Gutleutmatten” is going to be a composition of a CHP district heating system and decentralized solar thermal systems. There will be about 38 substations. The solar thermal collectors are going to be installed on the buildings’ roofs and will amount to approximately 2,200 m² in total. The decentralized thermal storages will result in about 177 m³ in total. The district heating station consists of a CHP unit with 600 kW_{el}/654 kW_{th} and several gas boilers with 4 MW in total (see Figure 17). A sophisticated control scheme allows the decommissioning of the heating network in a way that the heating network will be put into operation only in those segments where a heating demand occurs. Thus excess heat from a specific collector field can be transferred from one buildings storage to a neighborhood building.

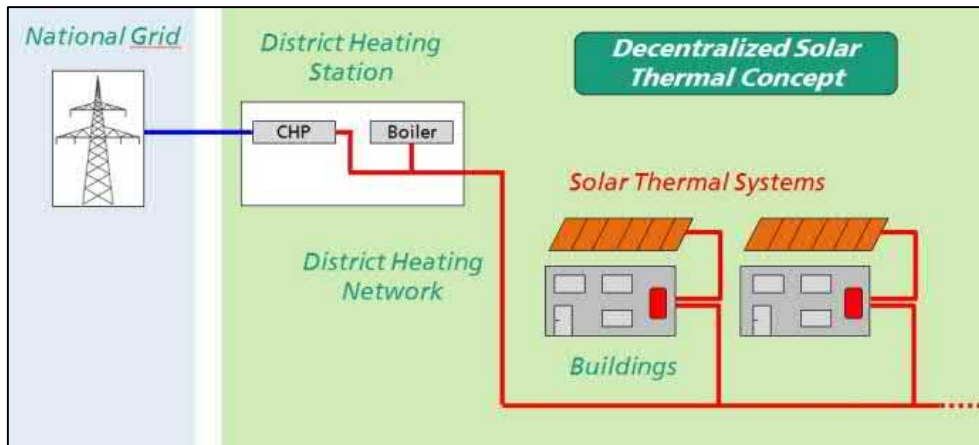


Figure 17: Schematic view on the integration of the local solar thermal system and storage into the district heating network
(Source: Fraunhofer ISE)

The entire building stock meets German low energy building standard “KfW-Effizienzhaus 55” with a specific space heating demand of about 35 kWh/(m²a). The domestic hot water demand is designed with 30 kWh/(m²a). Total heat demand of the urban district sums up to 1,400 MWh/a for space heating and 1,200 MWh/a for domestic hot water (DHW) preparation and is supplied by natural gas fired district heating (70 %) and distributed solar thermal (30 %).

The delivery of the DHW in the buildings is partly organized by central fresh water stations as can be seen in Figure 18, partly as flatwise local fresh water stations.

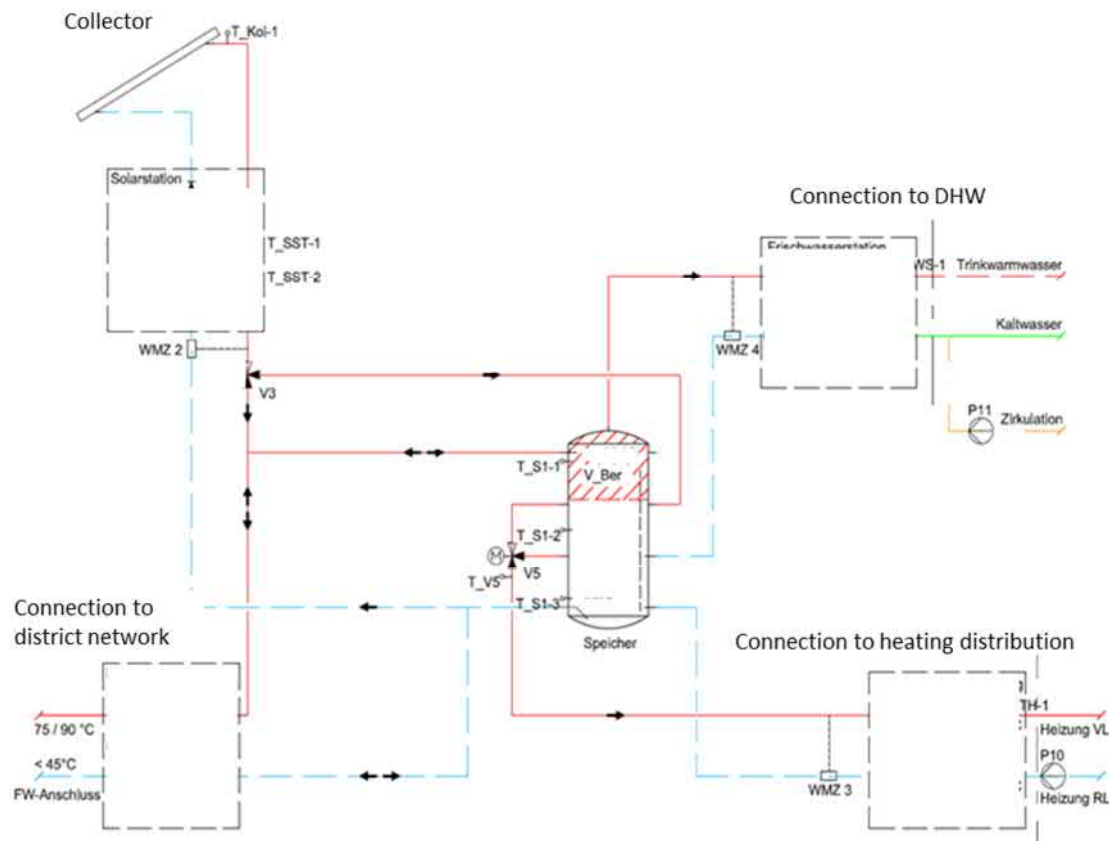


Figure 18: Layout of the hydraulic system in the buildings (Source: badenovaWÄRMEPLUS GmbH & Co. KG)

4.4.3 Decision and design process

Why was this project initiated, to answer which need?

The project was initiated by the City of Freiburg, where there is a local requirement for an energy concept for all new developments based on public owned ground. In addition municipal building codes require that buildings energy demand for heat does not exceed 55 kWh/(m²·a) for domestic hot water and heating. The energy concept for Gutleutmatten evaluated different solutions with and without a heating grid and different heat sources like biomass, gas and solar thermal.

badenovaWÄRMEPLUS GmbH&Co. KG and Fraunhofer ISE offered as additional option the described innovative solution combining Bio-Gas based CHP in combination with local Solar thermal production and smart heating grid operation. Due to the low CO₂-emissions of this solution and the innovative aspects this solution was selected.

Which stakeholders were involved in the project?

- City of Freiburg with several city council departments (a.o. energy department and town planning)
- Regional Utility Company (badenovaWÄRMEPLUS GmbH&Co. KG)
- Fraunhofer Institute for Solar Energy Systems ISE

Which resources were available before the project?

- Strong participation and intervention by local administrative facilities and overall good co-operation between involved actors
- Dedicated individuals with high specific expertise

Who (what) were drivers and who (what) were opponents (barriers) – and why?

On the one hand several important stakeholders joined forces in order to come up with a climate friendly and innovative solution. On the other hand subsidies have been enablers for innovative approaches and investments for specific technologies like solar collectors or enhance quality of the district heating network (*Innovationsfond* of badenovaWÄRMEPLUS GmbH&Co. KG and German state owned bank *KfW*), specific research and monitoring (German Ministry for Economy and Energy *BMWi*).

Barriers to overcome have been high initial investment costs (compared to standard solutions) resulting in relative high levelized cost of heat as well as time-consuming communication with very diverse group of building owners.

What have been the main challenges regarding decision finding?

The main challenging point was to define an acceptable level for the customer's financial contribution and energy price vs. the environmental approach. Background is the already high cost for new building at the location. In addition the development of a reliable cost calculation for the whole system in a very early design stage was challenging.

What was finally the crucial parameter for go /no-go decision?

The innovative part of the solution in combination with the availability of funding was the base for the decision.

Financing issues:*What have been the main challenges / constraints regarding financing?*

- Implementation of technical innovations and specific cost for design

Which business model applies to the project?

All building owners are obliged to contract with the utility operating the district network and the collector system including storage and transfer stations. Heat customers are supplied with heat including service and operation of the whole distribution for a basic rate per m² useful area plus an energy rate per kWh.

Technical issues:*What have been major technical challenges / constraints regarding system design?*

- Limited areas on the roofs due to restrictions by the city's planning office
- Interface roof (erection of the solar thermal collector fields by the energy supplier on the roofs of the buildings owned by the real estate developers)
- Communication effort with more than 20 different architects and planners of the buildings
- Hydraulic set-up, control and operation of the Solar collector fields in Interaction with the district heating network

Description about the design approach applied:*Which design targets have been set and why?*

Superior target was to design and implement a highly energy efficiency and low-carbon energy heat supply for the new urban quarter Gutleutmatten. More specifically, it was decided to implement a solar-assisted micro-heating grid in close distance to the existing district heating supply area which should meet optimum cost-performance targets. In addition the enhancement of the energy performance by reduced distribution losses and the compatibility to the future development of electric energy system.

Which decision steps lead to the retained solution?

1. Energy concept was developed by a technical consultant ordered by the municipal government

2. Idea for a solar-assisted low-temperature micro-heating grid backed up by district heating was brought in by badenovaWÄRMEPLUS GmbH&Co. KG and Fraunhofer ISE and further elaborated in interaction with the energy department of the city.
3. City government approved the technical concept.
4. Applications for subsidies on investment for innovative technologies, project-specific R&D as well as monitoring were handed in (national R&D promotion scheme, badenovaWÄRMEPLUS GmbH&Co. KG innovation fond)
5. Technical project development by utility supported by scientific accompaniment and monitoring by scientific partner (Fraunhofer ISE, Germany)

Which tools have been used during the design phase?

- Spread sheet calculations and simulation tools of the utility and the scientific partners
- control group meetings

What have been the main challenges in the design phase?

- To identify and bring together all necessary stakeholders and actors
- Communication and decision-making processes
- Setting up of an appropriate tender model
- Development of hydraulic schemes and control algorithms

What have been the most crucial interfaces?

- building owners ↔ politics
- utility ↔ building owners

4.4.4 Lessons learned (barriers and success factors)

What have been major success factors?

- The common will
- The availability of different expertise within the core group
- R&D project with resources for innovation
- Climate policy of the City
- Clear targets at the beginning and a clear communication into the public space

What have been major bottlenecks?

- Acceptance of an energy concept based on a community system like district heating in times of rising individualism in the society

What are the major lessons learned?

- Political will and support are very conducive
- The cost of solar thermal supply concepts are dominated by installations costs and connected cost for risk management. In addition cost of design and planning is very sensitive to distributed ownership of buildings.

4.4.5 Summary

The case of **Gutleutmatten** is good example of a **low-carbon energy supply system** with a very effective and productive cooperation between utilities and applied research. Based on a superior target (high efficiency, high share of RES, district heat as auxiliary service) the design of the heat supply system has a potential to act as a blueprint for integration of solar thermal and district heating as well as for optimized operation of heating networks.

From a technical point of view, local production of solar thermal has the potential to lower the distribution losses using smart communication technology to optimize the heat supply of specific buildings. The newly developed system enables the connected CHP to operate in line with the

electricity market. The hydraulic integration of medium sized collector areas is still a complex task regarding design and put into operation.

From an organizational point of view the good cooperation between city government, utility and research institute was a key success factor. The challenge is to reach consensus regarding acceptable levelized cost of heat for a low-carbon supply system. Moreover, applying for subsidies and participation in R&D projects (national and utility funded) helped to deeply analyze and proof innovative (out-of-the-box) ideas, to co-finance new technologies and to disseminate achievements to a broader audience.

4.5 Solar-assisted residential area “Vallda Heberg” in Kungsbacka, SE

Authors:

Martin ANDERSEN	Dalarna University, SE Chalmers University of Technology, SE	maar@du.se
Jan-Olof DALENBÄCK	Chalmers University of Technology, SE	jan-olof.dalenback@chalmers.se



Figure 19: Aerial view on the “Vallda Heberg” residential area, Kungsbacka, Sweden (Source: Eksta Bostads AB). In sum, 570 m² flat plate collectors (FPC) and 108 m² evacuated tube collectors (ETC) roughly supply 29% of the final thermal energy demand (incl. network heat losses) of the buildings with a heated floor area of around 14.000 m².

Project fact box:**General information:**

Location: **Suburban area outside the city of Kungälv (South of Gothenburg)**

Urban scale of area: **5.3 ha**

Population in the area: **260 (128 living units)**

Building mix in the area*: **SFH 38.4%, MFH 9.3%, AB 52.3%**

26 modulated passive houses developed by NCC

4 multi-family buildings (16 living units)

6 row-houses (22 living units for seniors)

64 apartments as home for elderly people

Consumer mix in the area**: **Small 48%, Medium 52%**

Plant owner: **EKSTA Bostads AB (Public entity)**

Specific information:

Heated floor area: **14 000 m²**

Final thermal energy consumption (incl. network heat losses): **~850 MWh/a (measured 2015)**

Useful thermal energy consumption: **640 MWh/a (measured 2015)**

Network heat losses: **~210 MWh/a (measured 2014/2015) (25%)**

Heating grid trench length: **>1 000 m**

No. of consumer substations: **four main substations / >50 consumer substations**

Supply/Return temperature levels: **70/50 °C (primary network), 60/50 °C (secondary network)**

Heat supply technologies: **Wood-pellet boiler (300 kW), Oil boiler (500 kW, backup), Solar thermal (~ 475 kW_{p,th})**

Specific information about the solar thermal part:

Solar thermal collector area: **678 m²_{aperture}**

Flat plate collectors (FPC): 570 m²_{aperture}

Evacuated tube collectors (ETC): 108 m²_{aperture}

Thermal energy storage volume: **~75 m³ (split into 13 units)**

Annual solar energy yield: **250 MWh (design value) / 230 MWh (Measurements)¹**

Solar fraction: **29 % / 37%¹ / 40% (Net/Gross/ Gross design)²**

Specific annual solar energy yield: **369 kWh/ (m²_{aperture}·a) (design value)**

Economic figures:

Total building project: **~ 340 M SEK (38 M EUR) (incl. VAT and construction cost)**

Solar heating system: **~ 3.3 M SEK (0.4 M EUR) (incl. VAT and construction cost)**

Subsidies: 25% of solar thermal system cost (LÅGAN programme + Swedish construction industry's organization for research and development (SBUF))

* SFH: single-family home; MFH: multi-family home, AB: apartment block

** Small consumers (SFH + MFH): <80 MWh/a, Medium consumers (AB, schools, etc.): 80-800 MWh/a

[1] Values originate from an analysis made by the national program LÅGAN, funded by the Swedish Energy authority. The analysis stated measured energy and estimates based on six months of measurements for parts of the system.

[2] Net solar fraction means output solar collector energy divided by sum of total energy into the system and thus incorporates system losses. Gross solar fraction means output solar collector energy divided by end user heat demand and thus does not include the system losses.

4.5.1 Introduction and description

The construction of the Vallda Heberg residential area commenced in 2011 with last building finished in 2016. It is a suburban area outside the city of Kungälv (south of Gothenburg) on the Swedish west coast, result of the collaboration between housing developer NCC (acting as contractor) and municipal housing company EKSTA Bostads AB (owner).

EKSTA has been delivering green housing solutions since the 1980's, always with a little lower heating demand than required in the Swedish building code. The energy system solution offered has for the most part consisted of small district heating systems with different combinations of wood-chips/pellet fired boilers and solar collectors acting as heat supply. Earlier projects had managed to achieve up to 35% solar fraction based on heating demand, which was set as a benchmark in the new project, subject to improvement.

The conceptual approach at project initiation was to build a number of single-family houses for sale, in addition to several multi-family buildings and an elderly home with apartments for rent. At the time, NCC developed a modular series-produced house whose heating demand was in agreement with the Swedish passive house standard (i.e. near zero energy buildings), which suited the project rather well. Hence, this house and the remaining building stock were all purpose built to supply a low-energy, 100% renewably heated living area. Main objectives for the project include:

- 100% renewable heating solution
- 40% solar fraction (based on useful building thermal energy demand)
- Passive house standard (near zero energy)
- Reduction of heat distribution cost

Although the challenges related to the fulfillment of the project were few, as all involved parties were experienced developers within their respective fields, some aspects proved challenging:

- Achievement of a higher (40%) solar fraction without use of seasonal storage
- Acceptable level of heat distribution losses when supplying a load of low heat demand
- Alternative to steel-pipe heat distribution, with similar performance at lower cost

The main approach to meet these challenges was to implement novel heat distribution, using a central wood-pellet boiler to supply a primary distribution network, delivering heat to four substations containing a decentralized storage. The substations couple to a secondary distribution network utilizing PEX pipes, with hot water circulation to serve the heating demand. Roof integrated flat plate collectors on the larger buildings and substations form solar roofs that deliver solar heat, used for pre-heating of domestic hot water in the substations, before delivery to the load. In addition, evacuated tube collectors are installed at the central boiler house with steeper inclination angles for optimized solar energy yields in winter (as well as reduced overheating in summer).

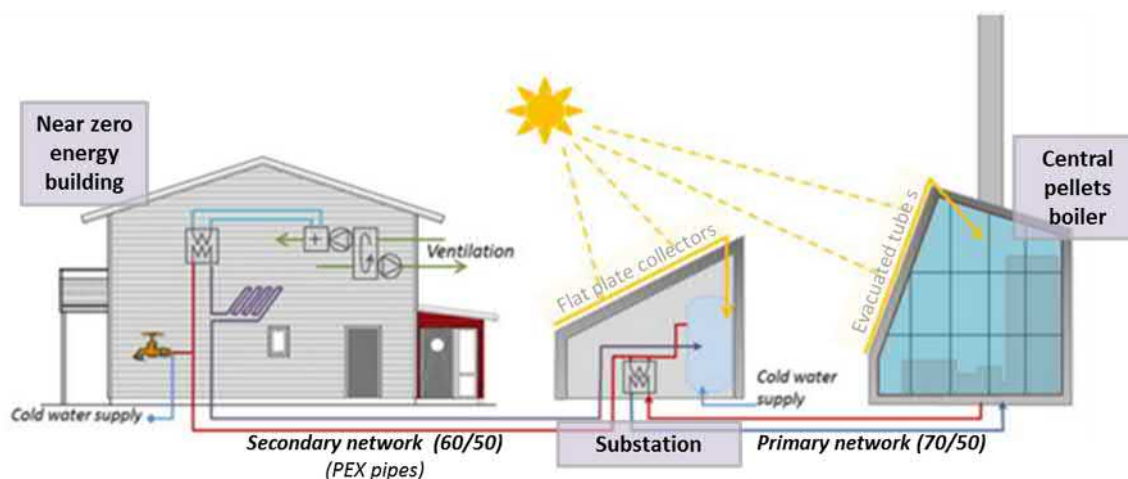


Figure 20: Schematic of the technical system in Vallda Heberg (Source: Adapted from Markgren Arkitektur AB and Mats Abrahamsons Arkitektkontor AB)

4.5.2 Technical description of the concept and innovative approaches

The holistic approach used in construction of the area is extraordinary in the way that by using EKSTA Bostads AB as purchaser and later owner and operator, it was possible to tie politics to business policy. The political will to move towards a renewable society could be expressed clearly by designing the area to be supplied 100% by renewable energy, whereof 60% biomass and 40% solar heat. By using NCC, manufacturer of housing to meet the Swedish passive house standard, as contractor and project manager, it could be shown that economic potential and political sustainability goals can be realized at the same time. **The sales model employed to sell the housing units naturally took the costs of the heating system into account and thus guaranteed that the area would be supplied by a large fraction solar energy at the expense of about 1% of the total project cost.** From this aspect, purchasers of a house/apartment received renewable energy as a main source of energy as part of a package deal, avoiding they be deterred by potential costs seemingly too high for the individual.

The innovative hydraulic scheme employed in Vallda Heberg includes conventional steel double pipes in the district heating primary culvert, delivering heat to four substations. In addition, flat plate solar collectors installed on the multi-family houses and the substations deliver heat to storage tanks placed in the substations. The combination of heat from these storage tanks and the primary culvert is then used to supply the secondary culvert.

Heat is distributed through a so-called GRUDIS system where warm water is circulated between the substation and the load in a secondary culvert, which consists of extruded polyethylene (PEX) piping in an evacuated polystyrene (EPS) casing. The circulating water supplies space heating (SH) through a glycol loop, by heating up incoming fresh air after it passes the outlet air heat-recovery unit, before running through a floor loop in the dwellings. This provides both an active, user controlled heating solution in addition to providing passive, year round floor heating. Domestic hot water (DHW) is supplied and pre-heated in the substation, then distributed with the warm water circulation to the load where it is drawn off.

This way, a relatively large solar fraction is ensured, due to the constant heat load of the circulation loop and the relative size of DHW demand to space heating demand. The pre-heating solution makes it possible to ensure that solar heat is the preferred source of heat, when available.

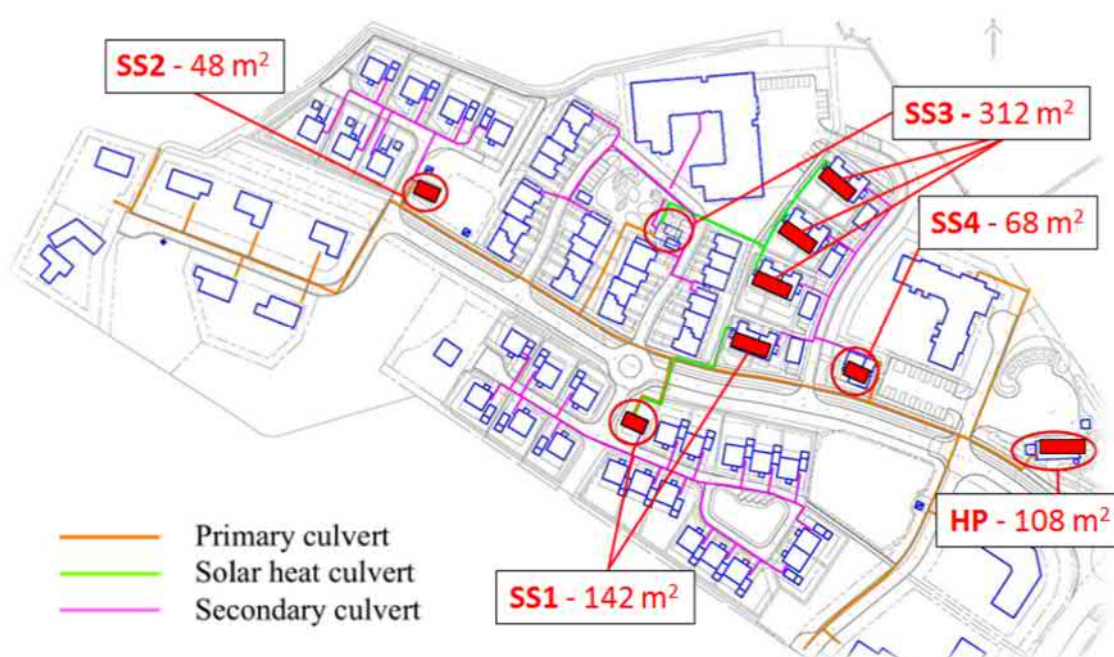


Figure 21: Schematic showing the heat distribution network in Vallda Heberg (Source: Master thesis of Olsson and Rosander, 2014). Primary culvert refers to conventional double steel piping, solar heat culvert refers to in ground insulated copper pipes and secondary culvert refers to PEX circulation piping. Rectangles filled in red indicate solar thermal collector fields; SS stands for substation (SS1 – SS4); HP stands for central heating plant.

4.5.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

The project was initiated by the municipal housing company EKSTA Bostads AB to cover the increasing need for dwelling in the already pressured housing market of the greater Gothenburg city area. While fulfilling the need of housing, it was simultaneously of great importance to progress in an exemplary manner with regards to energy supply and efficiency, in order to address present-day issues of climate change and sustainability by providing a model for how to combine economy and sustainability.

Which stakeholders were involved in the project?

- Contractor (including project management): NCC Construction Sweden AB
- Real estate owner: EKSTA Bostads AB - Municipal housing company
- Consultants: Markgren Arkitektur AB, Mats Abrahamsson Arkitekter AB, NCC Environment, Andersson & Hultmark and BA-Elteknik.
- Collaboration: end users, Kungsbacka municipality

Which resources were available before the project?

Electric heating has traditionally been used extensively and was one alternate option considering passive housing with low energy needs. However this would increase the pressure on the electric grid and also would require measures to ensure that the energy consumed was renewable.

District heating could be supplied from nearby Kungsbacka, but would entail a larger network extension, speaking in favor of the isolated smaller district heating system chosen.

As gas is not used extensively in Sweden, in terms of primary energy, biomass and solar were two readily available and easy to use energy sources.

Who (what) were drivers and who (what) were opponents (barriers) – and why?

The main driver was the real estate owner, Eksta Bostads AB, which in turn is owned by Kungsbacka municipality. The project was an answer to the housing situation experienced in most major cities, where the market is under mounting pressure. Eksta in turn maintains the intent to gather information on practicality of different technological solutions, which inclines their projects towards innovation while supplying renewable technical solutions. In short, they decide what they want, then work out an appropriate solution.

NCC as contractor had a financial interest as a housing manufacturer. The opportunity to test a new modular (passive) house along with the business opportunity represented by selling these houses simultaneously was, if not a driver, certainly a beneficial support.

Not many barriers were found. The area is regulated in the spatial plan as a development area for housing, so that the potential barriers would have related mainly to the choice of energy supply. At present, waste is currently being imported to Sweden's major cities for incineration in larger district heating plants, complementing recycled industrial heat from the outskirts of the city. Gothenburg has a large share of industrial recycled heat, while Kungsbacka has none.

As such, the most promising option was biomass in line with the vast resources available in Sweden.

What have been the main challenges regarding decision finding?

Key challenges were related to those inherent to the technical outlay of a low energy demand system. The optimal solution for low energy housing (passive according to Swedish standard) of the class considered, with airtight envelopes, is difficult to find and requires a lot of attention to load balance and detail planning. The challenges lie in making a complex solution involving a lot of control systems

work in a simple manner. Eksta chose to go for a solution proven in their earlier projects, while implementing a few new elements (passive house, GRUDIS culvert and evacuated tube collectors) and thus found their challenges in compromising between the operation of these.

It was generally perceived a benefit that Eksta acted as both realtor and energy supplier to the housing area, as this meant that all larger decisions could be taken beforehand in the planning stage, which meant a more complete set of boundary conditions for all involved parties. The added security posed by this organization of the process voided any potential larger challenges often seen when a larger set of actors are involved in a project without a designated order of project phases.

What was finally the crucial parameter for go /no-go decision?

There were no crucial parameters related to the evaluation of the project viability. The decision had been made on a political level in Kungsbacka municipality to build new housing in Vallda Heberg. The cost of the energy system was considered irrelevant to the decision regarding choice of energy supply as a whole, as it made out about 1% of the overall cost, which is considered well within any margin on the estimated cost.

Financing issues:

What have been the main challenges / constraints regarding financing? Which business model applies to the project?

NCC was contracted to build the whole residential area for customer Eksta. The single-family houses were sold off by NCC as one of their products, whereas the remaining facilities were taken over and rented out by Eksta. The energy system was purchased and is operated by Eksta, which sells energy to the inhabitants of the area. This is the municipal housing model.

In planning this project, contractor NCC had considerations about the price level of the houses offered, as this was about 13% higher with the additional climate shell, as opposed to the same houses in a higher energy class. Therefore, there was some doubt related to the market reaction when the dwellings were put out on sale. However, the rate at which the sale proceeded exceeded every expectation and thus the willingness in the market to pay for renewable energy solutions and energy efficient measures seems high.

There were no additional challenges related to financing as the end product was considered most relevant and cost issues were largely secondary. It should be mentioned that the project enjoyed part of this economic freedom due to dedicated subsidies.

Technical issues:

What have been major technical challenges / constraints regarding system design?

The complex interaction between control systems and solar collectors has proven to be a significant challenge in systems with a higher degree of complexity, like the one in Vallda Heberg. Some challenges were experienced during commission of the solar system, as it received air pockets in the piping. This is largely seen as an issue related to installer experience and could be easily resolved.

One constraint on the system design put on the solar system was that the increase in solar fraction should not be made on the expense of an increased storage volume. Increasing the solar fraction upwards of 35%, it is natural to consider larger storage units for seasonal or part-seasonal storage. However, this was never an option in a system of this scale.

The choice of heating system for the dwellings incorporated a floor heating loop, which posed a challenge during dimensioning. Seeing that the climate shell was of such a standard that little auxiliary heat was needed to maintain adequate living comfort for the inhabitants, it was necessary to insulate the floor-heating loop to avoid excessive indoor temperatures. This limited the power to an acceptable level for year round unregulated operation.

For the elderly home, the idea of passive- and air heating was abandoned after thorough consideration had been made to the user knowledge of, and familiarity with, newer systems. Older users are often

accustomed to user controlled heating, i.e. radiators, which made this a preferred choice in the elderly home. This meant having to separate the SH and DHW supply in the building, which added somewhat to the system complexity, but had no particular consequences for the system otherwise. In fact, it had the added benefit of reducing the return temperature in the primary culvert.

On the other side, during a user survey on the senior living quarters (22 row houses), it was found that the senior citizens had a tendency to use a lot more energy than first calculated in the design phase and that they would extend the heated area by incorporating the hall into the house, which further increased their energy consumption.

Description about the design approach applied:

Which design targets have been set and why?

Previous projects by EKSTA have achieved solar fractions up to 35% (of end user heat demand) and this was set as benchmark for the Vallda Heberg project. The new target was 40% solar fraction and the remaining supplied by biomass in order to improve the amount of heat covered by solar from earlier projects. Measurements have shown solar coverage close to the target, upwards of 37%, which is slightly less than expected. However, this has largely been due to operational problems like pump failure, air entrainment in the pipes and even control system faults. Work is ongoing to improve the operational strategy by implementing different solar loop pump control and faster fault detection, among others.

What were the decision steps to lead to the retained solution?

The layout of the energy system was chosen according to the constraints and challenges mentioned earlier. Once the solution of wood-pellets and solar energy had been chosen, it became a priority to find the most suitable way to increase the solar fraction without making significant increase in storage volume necessary. One of the major challenges with solar heat is that the peak production is in the summer, when the heat demand is at its lowest. Although the amount of DHW does not vary so much over the year, the overall heat demand is significantly lower in summer, which leads to two effects in particular:

1. A full diurnal storage and excess solar heat on hot days
2. Increased distribution heat losses due to large circulation compared to demand

Furthermore, it was desirable to lower the costs of the heat distribution system.

One way to deal with the challenges of excess solar heat was to install solar collectors on the heating central with a high tilt (70°), so that the increase in solar fraction would happen by collection of energy during the autumn-winter months where the demand is highest.

To address the second challenge, one proposed alternative was to lower the network temperature and preparing DHW in the substations. By preparing the DHW more centrally and at lower temperature, an extra heat exchanger for DHW preparation in the dwellings became obsolete, which in turn made the heating system cheaper and more efficient.

The lower temperature of the network secondary culvert lowered distribution losses during the summer and meant that a larger part of the circulation losses could be covered by solar heat, and the culvert itself would be cheaper, being made of EPSPEX.

Another alternative to the high distribution losses would have been to abandon the use of a district heating system. However, the options for individual heating generally had a higher price level and, in the instance of direct/indirect electrical heating would require installation of large arrays of solar PV panels. This was decided to induce an undesired level of complexity, as it would require use of private roof surfaces (i.e. SFH) which has juridical issues related to owner responsibility in the energy regulations. Furthermore, with the lower efficiency of solar PV panels compared to solar thermal collectors, it was considered unfeasible to achieve a 100% renewable energy share.

Which tools have been used during the design phase?

For building simulations, IDA (ICE) was used. For cold bridges HEAT2. For culvert losses and ground effects a FEM analysis was done. Cost estimation is largely done with Wikells, a Swedish program for building and HVAC enterprise. Solar energy yield was mainly planned from operational data in other systems in the same region and experience.

4.5.4 Lessons learned (barriers and success factors)*What have been major success factors?*

A survey of inhabitant comfort in the area largely shows that the population is very pleased with their housing. The energy efficient housing is popular due to low energy bills and the renewable energy solutions have seemed to work as planned. The market reports show that the area is a desirable place to live and the houses have seen a fair increase in value on the free market. The renewable energy solutions seem to aid to this.

NCC has had large success with their new house and has received prizes for it. The Kungsbacka municipality has also received a lot of attention and the Vallda Heberg residential area is featured as a gold example of best practice example in “Build up” - the EU portal for energy efficiency in buildings. Several research projects have been conducted and connected to the project and the residents have become accustomed to wide spread media attention and regular study tours bringing in “tourists” curious of the scheme.

What have been major bottlenecks?

None, so far. However, there have been some challenges related to the full operation of the system. In 2013 as the area was still only partly built, there were some startup problems. Control optimization required a lot of time as well as problems with leakages. Air entrainment in the solar loop pipes occurred in the beginning, leading to lowered production. In the first quarter and half of 2016, leakage of glycol from the circuit of the solar loop led to low production and the system log was rendered inactive, leading to missing log data. Log data has also been missing in the log system for larger periods of time, without any apparent reason.

An area prepared for larger villas has remained unconnected to the network for a longer time, which has led to some parasitic distribution heat losses. The commercial customers foreseen in the area were connected in 2016 and so the system is only fully connected at present. Preliminary results show that the system is performing better than in 2015, despite the operational challenges.

What are the major lessons learned?

Partly new system layout needs time to have all control issues in place. Some logging issues can be avoided by installing double sets of sensors. Regular monitoring should aim to reveal leakage problems early, IR thermography from air may prove useful.

Investigation of reasons for higher-than-theoretical values of energy consumption show that user behavior differ significantly in some cases from that assumed in initial energy calculations. Particularly elderly have an increased consumption to reach comfort levels which may be planned for in the design phase by scaling the solar system and storage accordingly.

What should be transferred from this project?

The project is continuously evaluated and it is anticipated that the majority of solutions will be transferred to future projects, if applicable. In particular the EPSPEX system for heat distribution has proven to be economically and technically preferable, with lower overall cost and higher practicality due to a shorter installation time than conventional steel pipes. Furthermore, it has been seen that the investment cost for a renewable energy system has a negligible influence on the attractiveness of a residential area and the housing offered. The implementation of such a system becomes much more feasible when the energy system cost is seen in relation to the overall system cost – in which it becomes

apparent that the additional cost for a renewable energy solution is such a small fraction, that it is considered irrelevant for all involved parties.

4.5.5 Summary

The Vallda Heberg residential area is an exemplary project under many aspects. Coupling highly insulated house, 100% renewable energy production, including 40% of solar energy without seasonal storage, and heat district distribution, the project was able to reach the initial ambitious objectives.

This achievement was made possible by elaborating a novel and complex heat distribution system. The heat district energy system is composed of different kinds of renewable energy sources (solar radiation and wood pellets), different types of heat pipes, different types of solar absorber technology and decentralized energy storage. This great achievement is even reinforced on the economic point of view. Indeed, the willingness of the market to access to sustainable housing solution was exceeding every expectation

The result of these measures collectively count as a great achievement for all involved stakeholders and has received widespread media attention.

4.6 Solar assisted apartment blocks “La Cigale” in Geneva, CH

Authors:

Gabriel RUIZ	CREM	gabriel.ruiz@crem.ch
Bernard THISSEN	Energie Solaire SA	b.thissen@energie-solaire.com

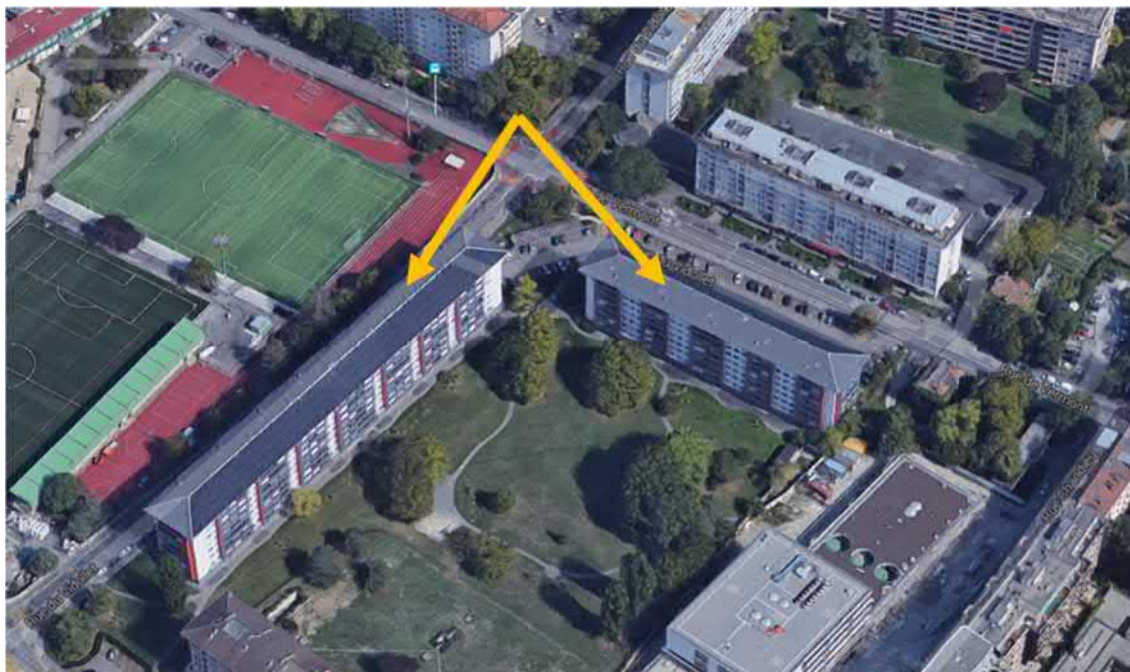


Figure 22: Aerial view on the solar assisted apartment blocks “La Cigale” in Geneva,, Switzerland. (Source: Google Earth)

Project fact box:**General information:**

Location: Apartment blocks in Geneva, Switzerland

Urban scale of area: N/A

Residents in apartment block: 458 residents in two buildings for a total of 273 apartments

Consumer characteristics: 100% residential consumers

Owner: Private housing cooperative

Specific information*:

Heated floor area: 18,999 m² (7,343 m² for Vermont and 11,656 m² for Vidollet)

Thermal energy demand (inkl. Network heat losses): 1,416 MWh/a

Useful thermal energy demand: 1,260 MWh/a

Heat losses (storages and network); 11 % (156 MWh/a) of thermal energy demand

Building heat distribution: 4-pipe network with centralized DHW tank

No. of building substations: 1 in each building

Supply/Return temperature levels: 40/35 °C for heating / 55/35 °C for DHW (design values)

Thermal energy supply system:

Compression heat pump 2 x 65 kW + 3 x 65 kW (@B-9/W45)

1,740 m²_{gross} unglazed solar water collectors (~ 1.2 MW_{p,th})

2 x 30 m³ latent heat storage tank (water/ice)

1 x 12 m³ and 1 x 20 m³ stratified water tanks

1 x 1,5 m³ and 1 x 2 m³ DHW tanks

1 x 130 kW and 1 x 200 kW gas boiler

Specific information about the solar thermal part:**

Annual solar energy yield and solar fraction:

948.1 MWh/a of solar generated heat (49.9 kWh/(m².a) x heated surface)

Share of solar thermal: 56% indirect, 13% direct

Solar (thermal) fraction: 69% (referring to total heat demand incl. losses)

Specific annual solar energy yield: 561.3 kWh/ (m²_{gross}.a)

Economic figures***

Total building project (refurbishment + heating system): ~ 16.3 M EUR (20 M CHF excl. 8% VAT)

Total heating system (incl. dismantling of old system): ~ 1.5 M EUR (1.83 M CHF excl. 8% VAT)

Solar collectors (incl. mounting): ~457 k EUR (560 k CHF excl. 8% VAT)

Subsidies for solar system: ~110 k EUR

* Nota Bene: Figures refer to the entire heated surface (2 buildings) and are extrapolated from values measured in 2016 at the "Vermont" building.

** Nota Bene: Figures refer to the whole system and are extrapolated from values measured in 2016 at the "Vermont" building (out of the 2 buildings).

*** Nota Bene: Exchange rate CHF to EUR considered. Base date: 01.01.2014 (www.oanda.com, accessed on 01/2017)

4.6.1 Introduction and description

'La Cigale' is a housing cooperative established in 1952 in Geneva, Switzerland comprising 273 apartments with a heated floor area of approx. 19,000 m². Between 2013 and 2014, a full renovation of the building envelope with modernization of the heating system was realized.

The overall project achieved very ambitious goals: Building refurbishment decreases thermal energy demand by 55% (building complex meets low energy standards today) and moreover, 69% of the buildings whole thermal energy production is covered by 1,740 m² roof-integrated unglazed water collectors. This high solar fraction is achieved by means of a heat supply concept that combines compression heat pump, latent heat storage (water/ice) and solar thermal in a very smart way.

Depending on the season of the year, space heating and domestic hot water preparation is either provided by solar thermal only, or a combination of solar thermal with heat pump operation including charging / discharging of the ice storage is applied. A small natural gas boiler provides peak and backup capacity.

4.6.2 Technical description of the concept and innovative approaches

For supply of space heating and domestic hot water (DHW) an innovative hydraulic concept called "IceSol" was applied for La Cigale (for further information see /1/). In each building, the concept combines compression heat pumps, unglazed solar thermal collectors as well as a latent heat storage (water/ice). Additionally, a small gas boiler for back-up and peak load operation is installed. Thermal energy is supplied via a four-pipe network with a centralized thermal energy storage and small centralized domestic hot water tanks in the basement (Figure 23). Temperature levels to meet space heating requirements are 40°C (supply) and 35°C (return). For DHW higher temperatures of 55°C are needed. A regular flashing of the dedicated DHW boilers at a temperature over 60°C allows to avoid legionella issues.

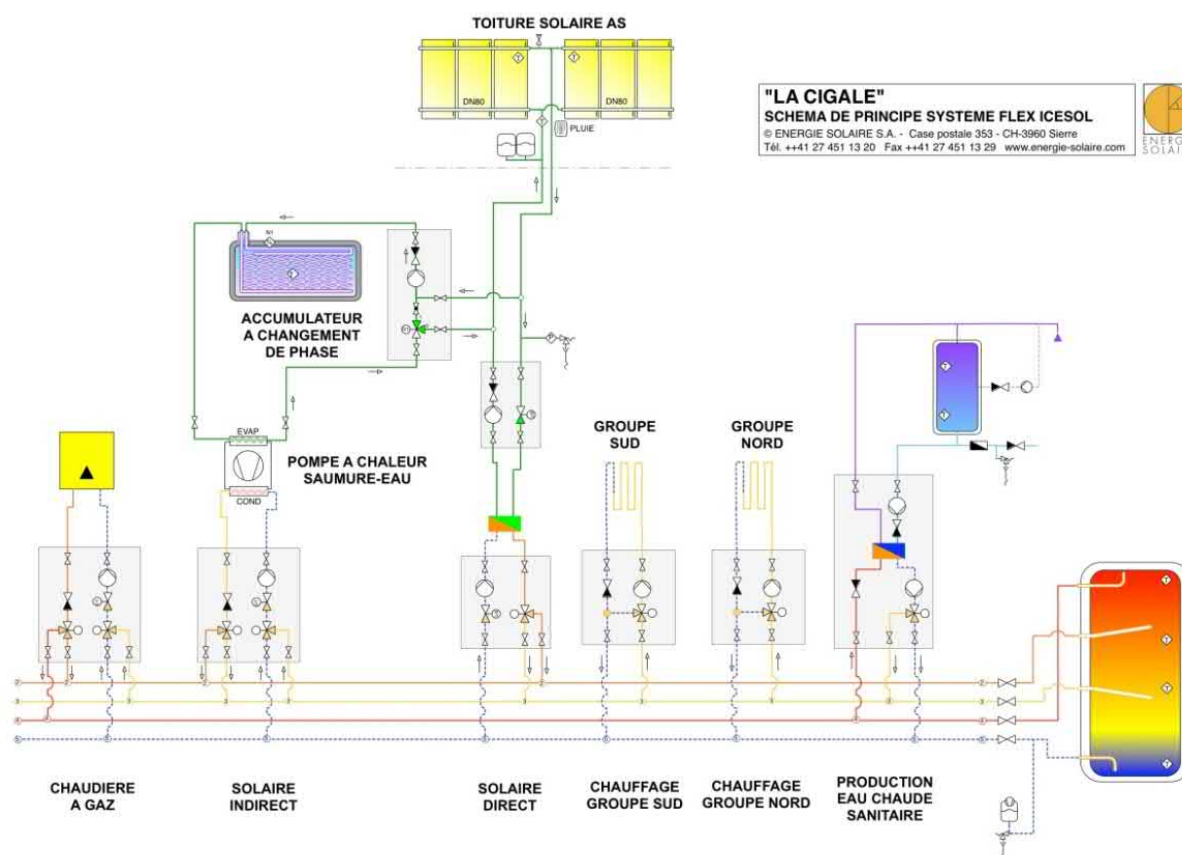


Figure 23: Hydraulic scheme of the heat supply system of "LA CIGALE". (Source: ENERGIE SOLAIRE S.A.)

Operating principle of the IceSol system

The operating principle of the IceSol system may be split into four phases: During warm season, solar thermal collectors are directly feeding the centralized thermal energy storage with the required temperature - 40°C for heating and 55°C for DHW (Figure 24, left). In case solar thermal is not sufficient to cover DHW demand, solar thermal output is used to unfreeze and heat up (to max. 20°C) the latent heat storage (indirect solar operation) and the energy stored in the ice storage is utilized by the compression heat pump to meet the demand (Figure 24, right).

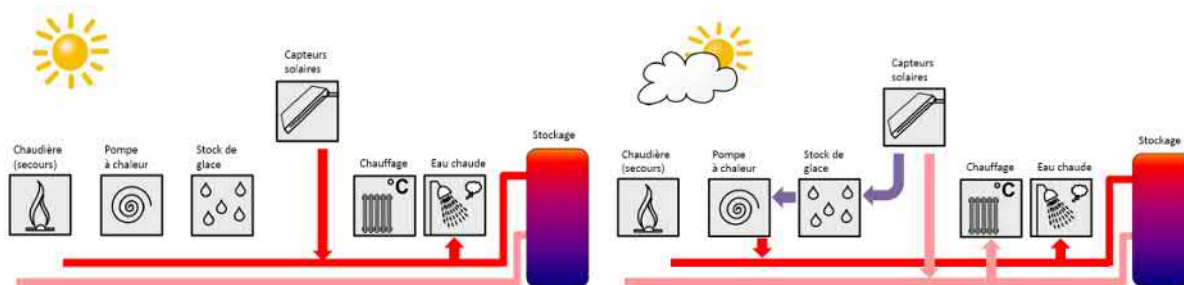


Figure 24: Principle diagram “LA CIGALE” – Warm season. (Source: ENERGIE SOLAIRE S.A.)

In case solar energy is too low for any direct service during cold season, all solar thermal heat is transferred to the ice/water storage (Figure 25, left). Its effect is, as worst case, to maintain the ice/water storage at 0°C, unfreezing the ice produced by the HP and thus keeping the system at a minimum of 0°C by playing with the latent heat. In case the latent heat storage is fully frozen, the storage can also be by-passed and heat pump can run in direct mode utilizing the solar loop as heat source. For peak heat demand at very cold winter days, a small natural gas boiler may be activated as well (Figure 25, right).

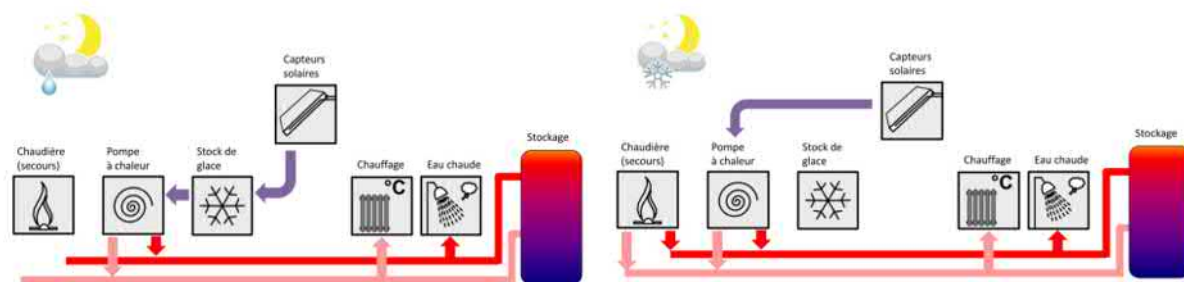


Figure 25: Principle diagram “LA CIGALE” – Cold season (source: ENERGIE SOLAIRE S.A)

The ice/water storage can work within the min 0°C to max 20°C temperature range. In the worst conditions (i.e. at 0°C) and when supplying DHW at 55°C, the heat pump performance coefficient is varying from a minimum of 3 to 4.7.

Gas consumption is designed to amount only 2% of the entire final energy demand for heating and domestic hot water (incl. losses) and was measured to be 6% in the second year of operation.

4.6.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

Major trigger of the whole project was the need for renovating the façade and for replacement of the old oil fired heating system. It was then decided to investigate both building renovation as well as modernization of the heating system whereas the following premises were stated beforehand:

- Decrease rental costs
- Reduction of CO₂ resp. reduction of fossil fuel demand for building energy services
- Use of eco-friendly construction materials
- Increased comfort, especially in winter
- Lower running costs for building maintenance
- Minimize nuisance while construction / renovation work

For the study different scenarios for were defined. In sum, two different qualities of building renovation were developed and analyzed (A) as well as six different heat supply scenarios (B):

- A1) Moderate renovation of the non-glazed surfaces only, energy target (heating, ventilation, DHW): ~210 MJ/m² (=58.3 kWh/m²/a) → 47% reduction compared to existing building stock
- A2) High quality renovation of the entire building envelope (incl. new glazing and loggia concept for the open balconies), energy target (heating, ventilation, DHW): ~110 MJ/m² (=30.6 kWh/m²/a) → 73% reduction compared to existing building stock
- B1) Heat pump coupled to geothermal probes
- B2) Gas boiler
- B3) Heat pump coupled to solar collectors
- B4) Solar thermal with seasonal storage
- B5) Wood boiler
- B6) Heat pump coupled to lake water

For decision finding a matrix was used considering costs (initial investment costs, annualized costs), energy efficiency as well as compatibility of the heating system with the respective building renovation alternative (Figure 26).

		Scénario 1	Scénario 2	Scénario 3	Scénario 4	Scénario 5	Scénario 6
		PAC Géo Th	Gaz Th	PAC Toiture AS IceSol	Stock Th	Bois Th	PAC GLN Th
Efficacité énergétique							
Efficacité chauffage		+++	++	+++	-	+	+++
Efficacité ECS		+	++	+++	-	+	+
Couverture EnR ECS		+	+	++	-	+++	++
Consommation énergétique primaire (Indice Minergie®)		+++	+	+++	-	+	+++
Coût d'investissement et d'exploitation							
Investissement total	CHF	1 350 000	560 000	1 230 000	-	990 000	500 000
Subventions	CHF	370 000	60 000	370 000	-	170 000	60 000
Coût annuel amortissement et exploitation	CHF/an	91 000	50 000	88 000	-	86 000	44 000
Coût annuel pour l'énergie	CHF/an	54 000	70 000	51 000	-	77 000	132 000
Coût annuel total	CHF/an	145 000	120 000	139 000	-	163 000	176 000
Compatibilité avec variantes enveloppe							
Compatibilité avec variante A (SIA380/1)		Oui	Oui	Oui	-	Oui	Oui
Compatibilité avec variante B (Minergie-Audit)		Oui	Oui	Oui	-	Oui	Oui
Compatibilité avec variante C (Minergie-P)		Oui	Non	Oui	-	Non	Oui

Figure 26: Cost comparison of the heat production systems alternatives in the frame of a preliminary study for the La Cigale project (Source: BG Ingénieurs Conseils SA)

Due to best cost/performance ratios it was decided to go for the high quality building renovation alternative (meeting Swiss Minergi-P building standard) combined with the “IceSol” thermal energy supply concept. As can be seen in Figure 26, the IceSol scenario (scenario three) shows a) high energy efficiency, b) has 2nd highest cost in terms of investment but 2nd lowest cost in terms of annual costs and c) is fully compatible with any refurbishment alternative.

Which stakeholders were involved in the project?

The housing cooperative, the estate corporation and a Swiss credit bank.

Which resources were available before the project?

The available local resources are: solar, geothermal, wood, gas and lake water. However, none of the available resource did represent a specific opportunity or was to be fostered more than another (except maybe solar heat).

Who (what) were drivers and who (what) were opponents (barriers) – and why?

The main driver was the architect of the project which implication was not only oriented towards structural aspects and aesthetics, but also towards energy efficiency. He made happen that the question of heat production, one of the main trigger for this project, remained a central point of discussion. Therefore, energy advisors were involved from the beginning.

Another key driver was that the estate corporation was convinced of the project objectives.

What have been the main challenges regarding decision finding?

To promote an innovative system never tested at such scale, and to reach a plausible cost estimate. Another condition was to ask for a turnkey project guaranteeing energy performances of the system.

What was finally the crucial parameter for go /no-go decision?

The final decision was based on the cost/performance ratio. Here the Swiss standard Minergie-P was chosen as building standard, which also strongly influenced the design of the heat supply system. There was also a strong will of the owners to go for the most environmental friendly refurbishment solution, as long as it remained within an acceptable financial frame. The whole refurbishment project proves to be also financially attractive on a mid-term base. High savings in CO₂ taxes are amongst the most important monetary drivers for the realization of the La Cigale project.

Financing issues:

What have been the main challenges / constraints regarding financing?

For both the Vermont and Vidollet buildings, the heating system represents a total investment of ~1.83 M CHF (1.68 M EUR as of June 2017), incl. dismantling the old technical heating installation, incl. adaptation on heating distribution piping to connect on the new heating system, incl. supply and rental of mobile oil boilers during the works in the heating plant. Where the total building refurbishment project cost is reaching 20 M CHF (18,4 M EUR as of June 2017). The main challenge was rather to justify a high standard of refurbishment and, along with it, an adequate and innovative heat production system. In other words, the selected advanced heating system would probably not have been considered without the strong motivation for an efficient refurbishment solution. In case of a less « ambitious » refurbishment, it is most probable that the solution using a combination of a gas boiler + a solar thermal system for domestic hot water pre-heating would have been installed.

Which business model applies to the project?

The project is profitable. The financial operation has been a success. The apartment rental cost was only increased by less than 50 EUR/room/month. This results from a combination of higher rating costs and lower energy charges.

Technical issues:

What have been major technical challenges / constraints regarding system design?

Designing the selected heating system at this scale was a premiere. The calculation tools were therefore not ready to handle the project and a certain additional work and care. The estimate the hourly profile of heat demand (DHW and heating) was also a challenge, as the norms and real figures are always different. The design includes a certain margin, however in order not to penalize the system efficiency due to oversizing; a small gas boiler was installed.

Description about the design approach applied:

Which design targets have been set and why?

The designed heat production system was targeting the following shares of energy sources: 29% of direct use of solar heat, 52% of indirect solar heat (through HP), 17% electricity at heat pump and 2% gas. Those targets are related to the system itself and the dimensioning of the storage tank. The measurements made over the last 12 months (2nd year measurements from 24.06.2015 to 23.06.2016) indicate a ratio of 24% electricity consumption (heat pump + all components of the heating plant using electricity), 6% gas and 69% (13% direct, 56% indirect) of the energy comes from the thermal solar panels. These results are slightly worse than the forecast. The main reason is the domestic hot water consumption that is definitely higher than the consumption profile which was taken into account for the dimensioning of the project. A way to overcome this would be to install additional solar collector area, and/or to install heat pumps with better COP values, and/or installing heat pumps able to get high temperatures at the condensator side even with temperatures far below zero on the evaporator side.

What were the decision steps to lead to the retained solution?

First to decide on the refurbishment standard. Here the retained solution was motivated by the possibility to reach high energy performance and to transform old balcony into non-heated loggias with a good financial balance of the project (with low impact on the renters). Once the refurbishment standard chosen, the realized IceSol solution was in competition with two other scenarios: heat pump coupled to geothermal energy and heat pump coupled to lake water.

The solution using lake water had a big disadvantage: the lake water grid has been installed by the local energy provider (SIG), meaning that each kWh of heat extracted from this grid has a cost. The owners of La Cigale did want to be as much as possible independent from energy costs. Therefore, this solution was abandoned.

The alternative with boreholes was also discarded for the following reasons:

- It was a little more expensive than the retained "ICESOL" system.
- Drilling boreholes in an urban environment brings a lot of acoustic disturbance. The people living in La Cigale lived in their apartments during the refurbishment. Thus it was crucial to reduce disturbances as much as possible.

Which tools have been used during the design phase?

Energie Solaire SA has developed a simulation tool in Excel over the last years. It is an hourly based simulation model. It uses climate data from Meteonorm extracted from Polysun. This simulation model was compared with field measurements on ICESOL systems and give good correspondence. Energie Solaire SA also developed a template for the ICESOL system in Polysun. However at that time, this simulation gave a worse correspondence compared to field measurements. It is, by the way, the aim of the company to improve the Polysun template to get more reliable results also with the Polysun simulation software.

4.6.4 Lessons learned (barriers and success factors)

What have been major success factors?

Strategically, the involvement of different stakeholders (housing cooperative's representative, architect in charge of the project, engineering companies) from the very beginning turns out to be very productive.

The architect played a key role as he addressed the future building heating systems together with renovation measures from the very beginning.

What have been major bottlenecks?

The technology readiness level at such scale was a risk. Another important constraint was to deal with an inhabited site to execute the works (bringing the nuisance level to a strict minimum) and to complete construction works within 12 months.

This retrofitting project implied also to deal with the building given configuration. A condition was to plug the new heating system on the existing distribution network. Another difficulty was in terms of space availability where the access to the technical room was not adequate to receive the selected heat production units.

What are the major lessons learned?

That an old building from the '50 can be converted into an exemplary building through energy efficient, and financially viable, retrofitting concept and heat production system.

What should be transferred from this project?

To perform at the same time the refurbishment works and the change of the heat production system.

To disseminate this success story for its replication (compared to other projects oriented towards new constructions).

4.6.5 Summary

The project of "La Cigale" in Geneva is a very successful example for high-quality building renovation combined with an innovative modernization of the heating system. As an important driver, the responsible architect pushed the development of an integral building renovation and heat supply concept from the very beginning and extensive pre-evaluation studies were carried out in an early project phase. For decision finding on which studied options to realize, overall energy efficiency as well as annualized costs were considered to be more important parameters than (initial) investment costs. This approach led to the following results:

From 2016 measurements (second year of operation) renovation of the building envelope decreases thermal energy demand by 55% (building complex meets low energy standards today) and moreover, around 69% of the total building thermal energy demand is covered by 1,740 m² roof-integrated unglazed solar thermal collectors. This high solar fraction is achieved by means of a heat supply concept that combines compression heat pumps, latent ice storages and solar thermal in a very smart way: Depending on the season of the year space heating and domestic hot water preparation is either provided by solar thermal only, or a combination of solar thermal with heat pump operation including charging / discharging of the ice storage is applied. A small natural gas source provides peak and backup capacity.

4.7 Solar-assisted mountain holiday resort “Reka Feriendorf” in Naters, CH

Authors:

Gabriel RUIZ	CREM	gabriel.ruiz@crem.ch
Fabien KUCHLER	Lauber IWISA AG	fabien.kuchler@lauber-iwisa.ch



Figure 27: Aerial view on the “Reka Feriendorf” in Naters, Switzerland (Source: Lauber IWISA AG)

Project fact box:**General information:**

Location: **Mountain holiday resort in Naters, CH, Switzerland**
 Urban scale of area: **1.2 ha**
 Residents in the area: **Total capacity = 224 people**
 Building characteristics: **78% apartments, 10% offices, 12% services and pool**
 Owner: **50% Swiss Travel Fund (Reka) Cooperative), 50% municipality of Naters**

Specific information:

Heated floor area: **6.646 m²**
 Electrical energy consumption: **115 MWh/a (measured 2016) / 269 MWh/a including heat pump**
 Thermal energy consumption (incl. network heat losses): **562 MWh/a (measured, 2016)**
 Useful thermal energy demand (heat sold): **468 MWh/a (measured, 2016)**
 Network heat losses: **94 MWh/a (16.7%, measured, 2016)**
 Heating grid trench length: **300 m**
 No. of building substations: **9**
 Supply/Return temperatures: **3 levels : 50..65°C for DHW | 35°C for heating | 25°C return**
 Energy supply system:
 3x72kW electrical heat pump for space heating + 12m³ technical tank,
 1x47kW electrical heat pump for DHW + 8m³ tank,
 31 ground probes (150 m deep) for seasonal energy storage
 ~273 MWh/a extracted, ~270 MWh/a injected (measured, 2016)
 Waste water energy recovery system
 ~135 MWh/year extracted (measured, 2016)
 671 m² uncovered PVT collectors (corresponding to around 450 kW_{p,th} and 102.5 kW_{p,el})
 487 m² PV panels (corresponding to around 70.5 kW_{p,el})

Specific information about the solar part:

Annual solar energy yield and solar fraction:
 ~218 MWh/a of direct solar generated heat (measured value)
 Solar (thermal) fraction: 39% (referring to total heat demand incl.losses))
 Specific solar thermal energy yield: 325 kWh/(m²·a)
 139 MWh/a electricity from PV and PVT (measured, 2016)
 Solar (electric) fraction: >100% of electrical demand excl. heat pump and 52% incl. heat pump
 Electric efficiency PVT collectors: 809 kWh/kW_p (measured, 2016)
 Electric efficiency PV collectors: 793 kWh/kW_p (measured, 2016)

Economic figures:

Total building project cost (incl. energy system): **~25 M EUR; (excl.8% VAT)**
 Total energy system project cost*: **~2.04 M EUR; (excl. 8% VAT)**

<i>Ground probes</i>	<i>408 k€ (20 %)</i>
<i>Heat pumps, technical needs, waste water energy recovery</i>	<i>489 k€ (24 %)</i>
<i>PV panels + PVT collectors</i>	<i>979 k€ (48 %)</i>
<i>Heating grid, others, engineering</i>	<i>163 k€ (8 %)</i>

[*] Exchange rate (CHF → EUR) considered. Base date: 01.01.2014 (www.oanda.com, accessed on 01/2017)

4.7.1 Introduction and description

“Reka Feriendorf” is a holiday resort located at 1,300 meters above sea level in Kanton Wallis, Switzerland and was inaugurated in winter 2014. The resort comprises 50 apartments, an indoor pool as well as childcare infrastructure and offices.

Total heated floor area amounts to 6,646 m² and the planned thermal energy demand (including electrical, heat and system losses) is 670 MWh/year (562 MWh measured in 2016). The high-quality buildings are equipped with heat pumps, PVT collectors as well as PV panels. The energy supply concept also includes underground heat storage and heat recovery from waste water. On an annual basis, about 77% of the thermal energy demand and 100% of the electrical energy demand (excl. heat pumps) is provided on site.

4.7.2 Technical description of the concept and innovative approaches

The energy supply concept consists of two separate networks with centralized storages: one low temperature dedicated to heating purposes (35°C network), the second, high temperature (65 °C network), is for the domestic hot water. Each separated heating network is supplied by an own heat pump optimized for the respective temperature levels needed (Figure 28).

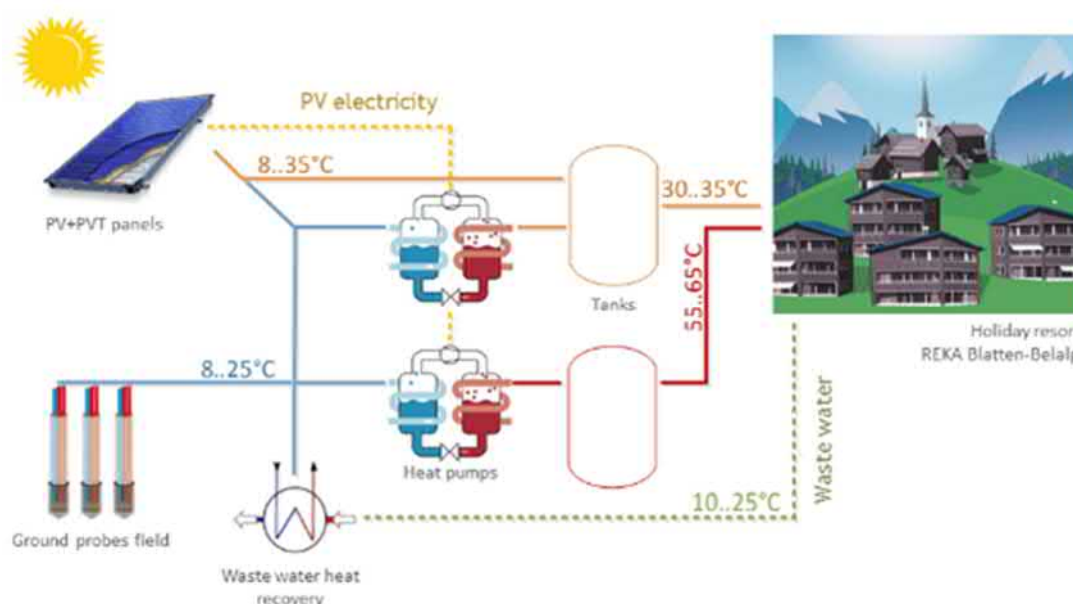


Figure 28: Principle diagram of the “Reka Feriendorf” heating system (Source: Reka AG 2015)

Operating principle:

On sunny days, thermal energy from the PVT collectors is directly used to meet space heating and domestic hot water demands (operating mode 1). In case the solar thermal collectors are not able to meet the demand, compression heat pumps help to boost the temperature to the required level (operation mode 2). Electricity produced by the hybrid collectors (PVT) may be directly used for heat pump operation or is transferred to the electricity grid. In addition to the hybrid PVT collectors conventional PV panels (reaching a sum of 173 kW_{p,el}) are installed to meet, in total, more than 50 % of the annual electricity demand of the entire holiday resort.

Besides of the PV, PVT and compression heat pump combination the use of seasonal borehole thermal energy storage might be highlighted. The storage consists of 31 ground probes with a length of 150 m and is used in summer to store excess solar thermal generated heat. In the heating season, the borehole thermal energy storage act as heat sink for heat pump operation and hence solar thermal

energy stored in summer helps to operate the heat pumps at higher efficiencies in winter. In addition, a waste water heat recovery system is installed as additional heat source for heat pump operation.

The heart of this innovative system is the main regulation device comprising of a hydraulic control valve and the related control rules managing the energy distribution and its sourcing strategy. The control settings were developed by the engineering office Elimes.

The project was awarded the Swiss solar 2015 award.

4.7.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

The project was initiated upon the Reka Company' ambition of creating a new holiday resort. In its ambition, Reka underlined the necessity to integrate an eco-friendly concept.

Which stakeholders were involved in the project?

- Swiss Travel Fund (Reka) Cooperative: Owner, investor and operator
- The Municipality of Naters: supporting the project on its territory
- Elimes: engineering office in charge of the overall project planning
- Swiss Federal Office of Energy (SFOE): providing some financial support

Which resources were available before the project?

Solar, wood (although not available in the direct surrounding), geothermal (but not enough to cover the whole energy needs) and oil (imported).

Who (what) were drivers and who (what) were opponents (barriers) – and why?

The driver was the Reka Company willing to invest in a new holiday Village. The local authorities did play a crucial role from a political perspective as they fully supported the project from its beginning.

Although the whole project represented a technical challenge, no important oppositions from public/private bodies were faced.

What have been the main challenges regarding decision finding?

For the engineering office to convince Reka about the innovative and adequate technical solution in terms of heat supply and building envelope. In fact, if the building typology was set by the project owner, the related building energy standard was left open to the engineering office. This allowed the definition of the insulation and ventilation standards in order to fit the retained energy production and supply concept.

What was finally the crucial parameter for go /no-go decision?

The financial aspects, i.e. to convince the project Owner to go for a higher investment balanced by low annual costs (total cost of ownership) compared to other alternatives.

Financing issues:

What have been the main challenges / constraints regarding financing?

To accept a concept with higher investment becoming profitable at long term (compared to a conventional system with oil boilers investment costs for the realized concept are around ten times higher). In order to promote a sustainable solution, the project Owner also accepted that the price of

final energy could be of more than 10%⁸ higher than the actual market price for an oily boiler system (benchmark scenario).

To obtain subsidies from public bodies with an innovative project which cannot, by nature, exactly fit some established programs.

Which business model applies to the project?

The target was to propose a fair price of energy sold throughout the lifetime of the energy system's components. The energy system itself is not meant to optimize profits. The overall business model was oriented towards generating profit through the holiday resort activities.

Technical issues:

What have been major technical challenges / constraints regarding system design?

To develop and implement a control system for the efficient operation of all combined energy system components. Especially control of the heat pumps for highest COP's was challenging.

Description about the design approach applied:

Which design targets have been set and why?

Reka's commitment of developing sustainable holiday resorts implied an energy supply concept for the Village with an important focus use of renewable energy sources. The condition was also set as being economically as interesting as using a traditional oil firing system.

What were the decision steps to lead to the retained solution?

A major challenge in the design process was to find the right balance (in terms of cost, energy and climate indicators) between building insulation standard and high share of renewable energies in the energy supply. An additional special issue to be treated was the location of the holiday resort (high altitude of 1500x meters) as well as the seasonal occupation. Next, architectural and landscape integration represented an important decision criterion.

In order to find an appropriate solution, four technical concepts were defined by Lauber IWISA AG together with their engineering branch Elimes for further investigations. Each option was evaluated considering four criteria (investment cost, annual operating cost, share of renewable primary energy, CO₂-emissions):

- 100% oil fired (as benchmark)
- Wood pellets boiler
- Solar thermal collectors + seasonal underground storage + heat pumps
- PVT collectors + seasonal underground storage + heat pumps

Results of investigations and decision finding:

The cost comparison of the 4 studied scenarios is presented in Figure 29 below. It appears that the realized concept (the 4th scenario) requires a much higher investment compared to the other concepts. The difference between the 3rd and 4th scenario illustrates the additional costs of PVT collectors. This higher investment cost is however balanced by the lower running costs (energy & maintenance).

⁸ 10% corresponds to a so-called « psychological limit » considered as reasonably acceptable to a standard investor for promoting green solutions (marketing, sustainability,...)

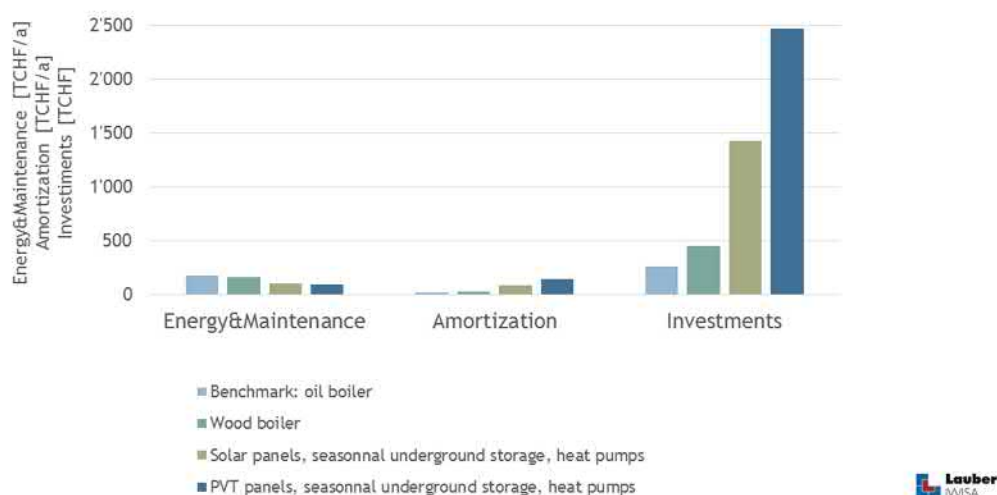


Figure 29: Cost comparison of the 4 studied scenarios. (Source: Lauber Iwisa, 2014)

In terms of total specific energy costs, Figure 30 below shows two main aspects:

- The retained solution (4th scenario) cost more than 10% higher, compared to a system using oil boiler (benchmark scenario), which proves the willingness of the investors and the owner to go on a green solution.
- The decrease of the oil price since the project study is not contributing to promote renewable sourced solutions from the perspective of the final price of energy (and especially concerning the retained scenario).

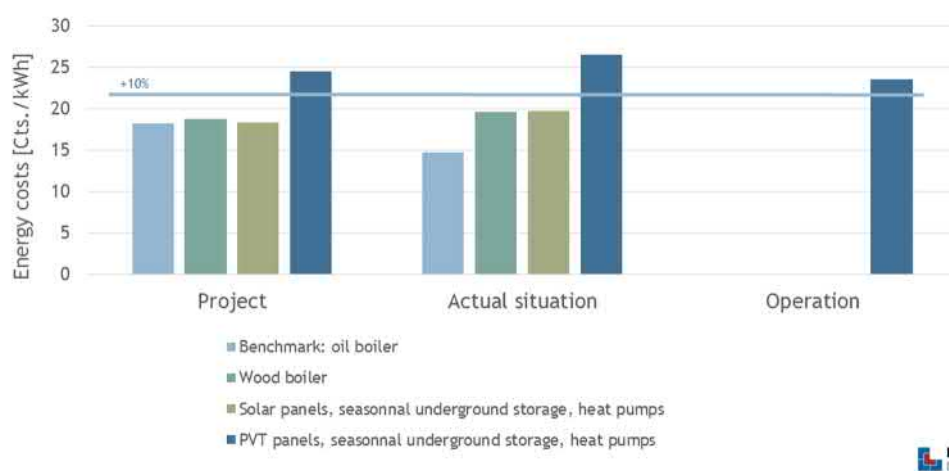


Figure 30: Comparison of the total specific energy costs of the 4 studied scenarios, with project situation representing year 2014, actual and operation situation representing 2016. (Source Lauber Iwisa, 2017)

Finally, the 4th scenario was chosen, despite a less profitable business case. The final decision was driven by the will of the Owner to build an exemplary energy-efficient holiday resort.

Which tools have been used during the design phase?

- “Polysun” for dynamic simulation.
- “AutoCAD” for static measures of thermal needs (building envelope)
- Own valuation tools for financial analysis.

What have been the main challenges in the design phase?

To run an iterative process leading to find the best solution (in terms of the above mentioned criteria for decision finding)

What have been the most crucial interfaces?

The relationship between the engineering office (establishing the concept) and the investor (project Owner) to agree on the retained solution.

4.7.4 Lessons learned (barriers and success factors)

What have been major success factors?

- The trusting relationship between the project owner (Reka) and the engineering office on the technical concept and the cost estimate.
- The homemade control algorithms of the system's main regulation device.
- The system works beyond expectations, where 77% of the thermal energy demand (incl. heat losses) is sourced from renewables (solar + environment), where 100% of the required electrical energy (excl. heat pumps) is covered by PV+PVT collectors, and where the electrical demand of the heat pumps is partly supplied by PV panels.
- Importance to estimate the project costs including the operating costs, and to have a strong financing capacity.

What have been major bottlenecks?

- Investing capacity requested for the retained energy system.
- The risk taking, actually supported by the engineering office in terms of risks management, and by the project Owner in terms of risk acceptance.

What are the major lessons learned?

- The necessary cooperation between the client, the architects, and the energy planner
- The need of flexibility during the project management
- A need for open and transparent communication between all participants
- A close collaboration between the planning and the construction

What should be transferred from this project?

- The applied and proven energy concept
- The feasibility (technically and economically speaking) of reaching ~80% energy independency with renewable and local resources
- The trade-off between high performance envelope and efficient energy system. This aspect gave birth to a Swiss research project "OSCARS" financed by the SFOE.

4.7.5 Summary

Awarded by the Swiss solar 2015 award, the solar-assisted mountain holiday resort "Reka Feriendorf" shows an extremely high level energy independency with more than 80% of the total energy demand (electrical and heat incl. heat losses) covered by renewables and local resources. The main innovation in the energy system is the main regulation device comprising a hydraulic valve and its control rules. To achieve such high level of performance, the energy system is based on different kinds of solar technology (PV panels and PVT collectors), multipurpose water storage and heat pumps coupled to ground probes. Economic studies showed that a major bottleneck to the realization of the project was the high initial investment costs. However, a good collaborative and trusting relationship between all stakeholders as well as the strong will of the Owner to build an exemplary energy-efficient holiday resort finally led to the realization of the project. Finally, the system works beyond expectations.

4.8 Solar-assisted urban quarter “Buchsee-Köniz” in Berne, CH

Author:

Christine WEBER

BKW AG

christine.weber@bkw.ch



Figure 31: Aerial and schematic view of the solar-assisted urban quarter “Buchsee-Köniz” in Berne, Switzerland. (Source: Kommunale Richtpläne Energie © Amt für Umweltkoordination und Energie des Kantons Bern, Google Maps)

Project fact box:**General information:**

Location: **Municipality of Köniz (canton of Berne) in Switzerland**
 Urban scale of area: **130 ha**
 Population in the area: **~4,000**
 Building mix in the area*: **70% SFH & MFH, 30% non-residential (school & retirement home)**
 Consumer mix in the area**: **30% small consumers, 70% medium consumers**
 Plant owner (public or private): **private (planned owner BKW, no execution)**

Specific information:

Heated floor area: **Unknown**
 Final thermal energy demand (incl. thermal losses): **7,090 MWh**
 Useful thermal energy demand (heat to be sold): **6,490 MWh**
 Network heat losses: **600 MWh/a (8.5%)**
 Heating grid trench length: **1,600 m (feed + return pipes)**
 No. of consumer substations: **16**
 Supply/Return temperature levels: **Winter: 88/60 °C / Summer: 75/50 °C**
 (Thermal) energy supply technologies: **Wood-chip burner (1.200 kW), Oil boiler (2.800 kW), Solar thermal (~ 560 kWp,th)**

Specific information about the solar thermal part:

Solar thermal collector area: **869 m²_{gross} / 799 m²_{aperture}**
 Thermal energy storage: **70 m³ pressurized steel tank**
 Annual solar energy yield: **361 MWh**
 Solar fraction: **5 % (based on final thermal energy demand)**
 Specific annual solar energy yield: **415 kWh/m²_{gross} / 451 kWh/m²_{aperture}**

Economic figures (Version 1: Basic layout + roof D – see description in chapter 4.8.2)

	CHF	Euro (JAN2016)
<i>Solar installation</i>	574'000	528'080
<i>Wood specific parts (wood chip burner)</i>	790'750	727'490
<i>Peak demand parts (oil boiler)</i>	175'000	161'000
<i>Hydraulics (incl. heat transfer station + storage)</i>	566'000	520'720
<i>Electricity + sanitary parts</i>	180'000	165'600
<i>Construction + site development</i>	1'227'000	1'128'840
<i>Heating Grid (incl. additional solar pipes)</i>	1'680'000	1'545'600
<i>Personnel fees + additional costs</i>	15.00% 778'913	716'600
<i>Reserve</i>	10.00% 597'166	549'393
<i>Additional costs</i>	50'000	46'000
Total incl. Internal and corporate labour	6'618'829	6'089'322

* SFH: single-family home; MFH: multi-family home, AB: apartment block

** Small consumers (SFH + MFH): <80 MWh/a, Medium consumers (AB, schools, etc.): 80-800 MWh/a, Large consumers (industrial consumers, hospitals, etc.): >800 MWh/a

4.8.1 Introduction and description

The municipality of Köniz (canton of Berne) in Switzerland is one of 50 "energy cities" /1/ in the country. Based on specific requirements of the federal energy strategy 2050, the municipality holds the GOLD energy label. This means that diverse measures regarding energy efficiency and implementation of renewable energy generation are taken and road mapped.

Starting point for the solar part of the feasibility study was a current project in development for a wood-driven district heating grid. As BKW supports innovative and ecological case studies and projects, an extended case study was carried out.

Thus, the existing project was expanded by an assessment for a solar installation on the roof tops of the Köniz primary school buildings, owned by the municipality. This school area had already been chosen as potential site for the initial district heating central.

4.8.2 Technical description of the concept

The overall system is a wood-driven district heating grid with solar assistance. The assessed area is an urban quarter in the canton of Berne, the municipality of Köniz. The heating central was planned to be installed on the premises of the Köniz primary school. The heat-supplied buildings were planned to be the school buildings and surroundings, mainly residential multi-family houses, an elderly home and some small enterprises. The bigger multi-family houses are administered by some bigger real estate companies. The main components are:

- Wood-chip burner
- Oil burner
- Solar thermal system
- District heating grid

Three different system layouts were economically evaluated, based on the available rooftop area as seen in Figure 32. A profound business case analysis was carried out for **Version 1 (Basic layout + roof D)** as this was the most feasible option regarding size, heat demand and costs.

1. Basic: Roofs A + B and heating central → in sum, 679 m² gross collector area
2. **Version 1: additionally roof D** → in sum, 869 m² gross collector area
3. Version 2: additionally roof E1 + E2 → in sum, 1.262 m² gross collector area

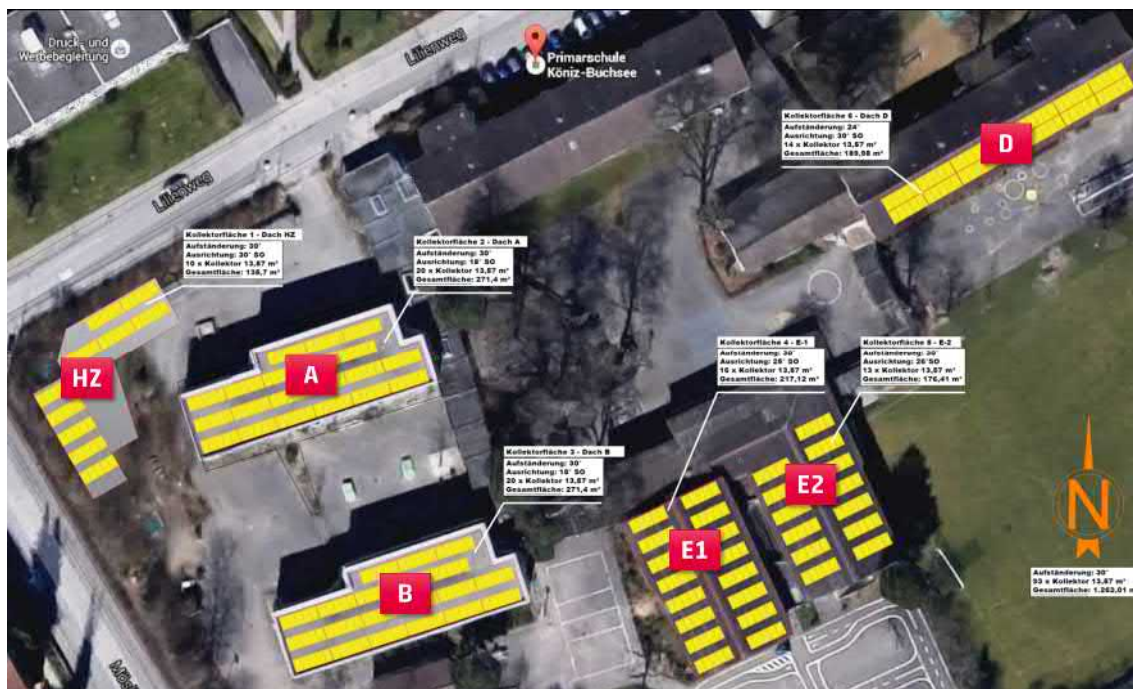


Figure 32: Different roof area options (Source: BKW, 2016, Google Earth)

In Table 1 next, feasibility study results for all three investigated options are summarized.

Table 1: Summary of feasibility study results (Source: BKW, 2016)

Version	Basic	Version 1	Version 2
Solar installation			
Gross collector area (m ²)	679	869	1.262
Solar heat production (MWh/a)	280	363	505
Specific heat production (kWh/m ²)	415	410	400
Solar fraction (%)	4.3	5.6	8
Economics			
Investment costs per m ² (CHF) (<i>Euro</i>)	766 (715)	703 (657)	680 (635)
Heat price, <i>only for SOLAR</i> (CHF cents/kWh)	12.5	12.9	
First feasibility study results	24	24.5	23

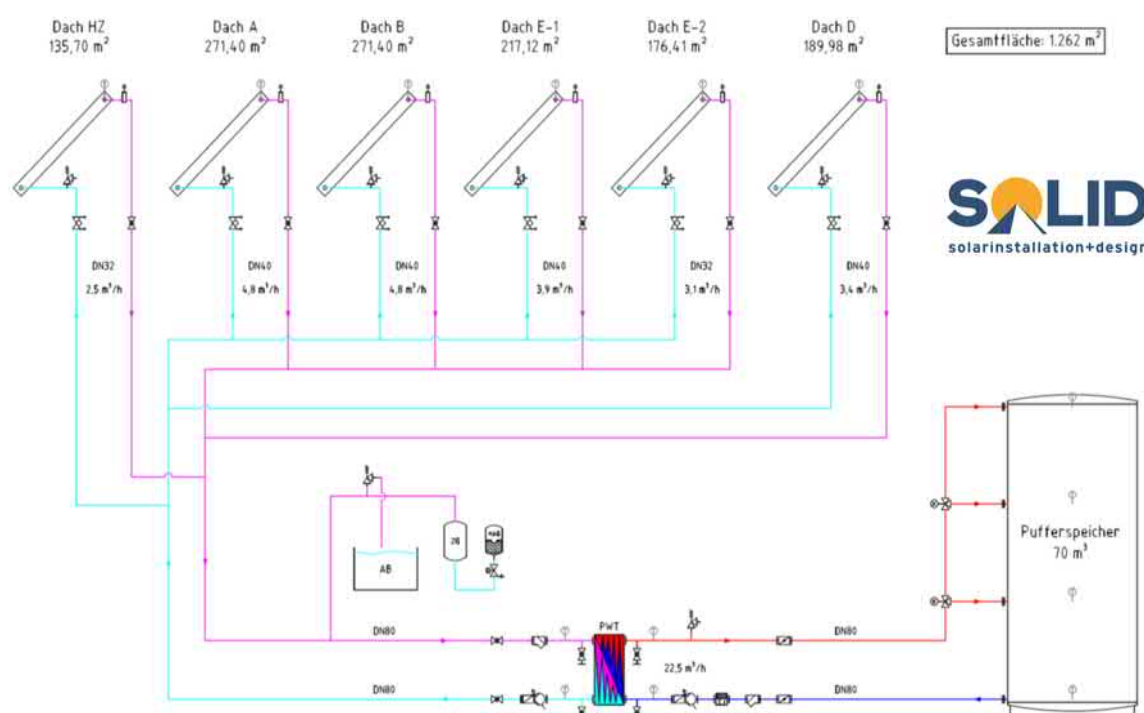


Figure 33: Hydraulic scheme of the proposed heat supply system for the urban quarter "Buchsee-Köniz" (Source: S.O.L.I.D. in /2/) Note: this schematic refers to the largest possible variation (version 2).

Evaluation criteria of the individual version were based on economic and technical feasibility.

It was decided to have a profound economic analysis for **version 1**, because this version was the most feasible option regarding size, heat supply and costs. **Version 2** had one major drawback: the rooftops **E1** and **E2** are old and covering a gymnasium. They need to be refurbished in five years' time. Therefore, this was not a realistic option for the present project.

For the economic feasibility, the heat sales quantity is crucial. In general, several key customers need to sign the contracts. As one of the key customers did not commit to the project, it was stopped. The business case was negative. Some adapted options were assessed but none is planned to be carried out.

4.8.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

The goal was to assess solar heat prices at larger scale. Starting point for the solar part of the feasibility study was a current project in development for a wood-driven district heating grid.

Which stakeholders were involved in the project?

- Tender phase: Municipality & engineering office
- Project development phase: BKW & engineering office, potential customers (inhabitants, municipality, and commerce)
- The solar assessment was managed by: BKW, engineering office, solar planner

Who (what) were drivers and who (what) were opponents (barriers) – and why?

- The drivers: federal energy strategy and energy label for municipalities (a national program the refers to the federal energy goals; municipalities need to meet certain standards regarding energy efficiency and integration of renewables)
- The barriers: keep the costs as low as possible

What have been the main challenges regarding decision finding?

Evaluation of the right costs for Switzerland, because there do not exist similar installations. Large-scale solar thermal plants have only been built a couple of times. Therefore, the solar planners are not experienced for those specific designs and dimensioning process.

What was finally the crucial parameter for go /no-go decision?

Costs: one key customer did not want to connect to the grid. The business case was missing.

Financing issues:

Which business model applies to the project?

A contracting business model was applied.

Technical issues:

What have been major technical challenges / constraints regarding system design?

The space for the thermal heat storage was a limitation.

Description about the design approach applied:

Which design targets have been set and why?

General grid & wood boiler: heat density of the heating grid. For economic feasibility a threshold for heat density of 2,000 kWh per meter of heating trench length is necessary. Solar thermal installation: biggest collector area on available roof tops in short distance to heating central.

What were the decision steps to lead to the retained solution?

1. Starting point: existing feasibility study for wood-driven district heating grid
2. Solar: existing roof tops close to heating central
3. Room for (additional) heat storage in heating central
4. Cost assessment of different "roof options". Estimation of investment and heat costs in CHF/kWh
5. Probability of installation (roof tops E1+E2 are going to be renovated)

Which tools have been used during the design phase?

Polysun, Excel, Expertise

What have been the main challenges in the design phase?

For the solar eligibility: Assessment of roof usability (statics and age)

4.8.4 Lessons learned (barriers and success factors)

What have been major success factors?

Involvement of experienced players and professional execution

What have been major bottlenecks?

- Costs: Main/key customers (high energy demand) compare to cheapest way of their heat supply. If prices differ strongly, they won't buy.
- Some political issues: One key customer did not want to have an arrangement with BKW.

What are the major lessons learned?

- If costs do not meet customer requirements, they won't buy.
- If potential customers have political constraints, they won't buy.

As a consequence, which framework conditions would be needed for a successful business case?

- Lower costs
- CO₂-fees
- Obligations to use renewable energy

What should be transferred from this project?

Currently, costs for conventional (oil, gas) heat production is too low for solar to compete with. This might change in due time.

Decision makers and heat customers are referring to today's pricing and the majority takes decisions based on current economic conditions.

Political decision makers are willing to make a change, but usually do not have the means to force people to make higher investments in costly technologies. This could only be the case for totally new settlement areas. Those are rare.

Solar-assisted district heating is an option, even with Swiss pricing. This needs further capacitation of professionals and/or involvement of external expertise. Therefore, national success stories are needed.

4.8.5 Summary

The solar-assisted urban quarter of "Buchsee-Köniz" is probably a representative example of the difficulty to enforce solar thermal system installation. Despite a high upfront effort for the assessment of the wood-driven district heating grid and additional solar thermal assistance, the project was not executed. The project faced many bottlenecks that can be highlighted:

- The cost of the investment and final energy was too high.
- The lack of reference projects with solar assisted energy system and similar scale implies an increase of the risk for the project.
- The economic viability of a heat district is strongly linked to its heat density in the heating grid. In our case study, the planned heat demand decreased after the withdrawal of one key customer. Thus, the overall economic feasibility was negative. This also displays the high risk and fragility of the project development.
- The whole project setup already starts under difficult conditions: the first tender is done by the municipality, then they receive offers of companies that want to build a district heating

system as contractor. The whole customer acquisition and economics risks then are located with the contractor that wins the tender. In general, the municipality supports the project with information for their inhabitants, but does not give any financial support or risk mitigation.

4.9 Solar-assisted urban quarter “Renens-CFF” in the suburb of Lausanne; CH

Authors:

Martin Joly	Sorane SA	martin.joly@sorane.ch
Morgane Emery	Sorane SA	Morgane.emery@sorane.ch
Paul Bourdoukan	Sorane SA	Paul.bourdoukan@sorane.ch

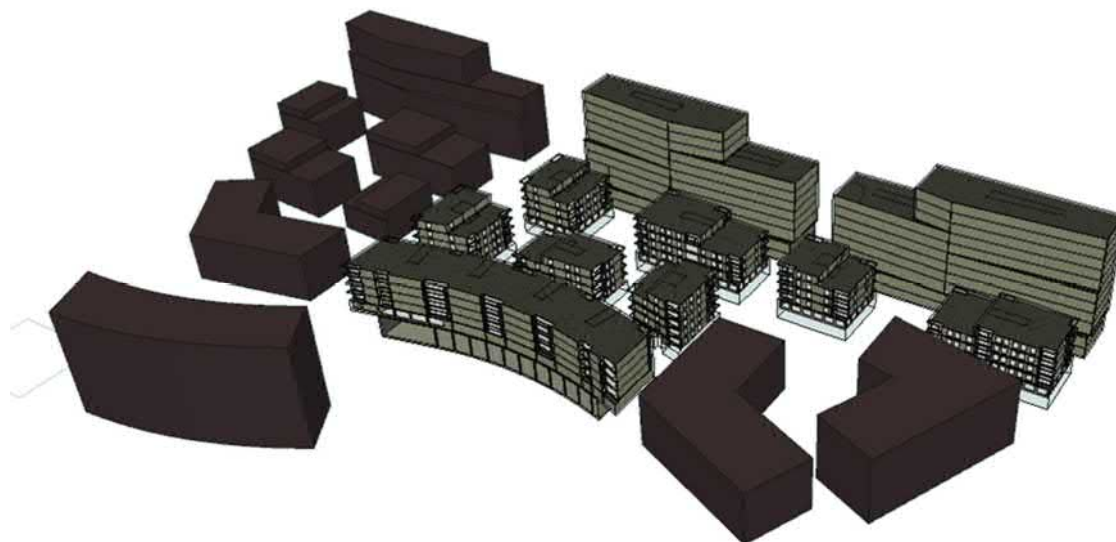


Figure 34: Schematic representation of the urban quarter “Renens-CFF” in Renens, Switzerland. (Source Sorane SA with Ida-ICE simulation output)

Project fact box:**General information:**

Location: **Urban quarter “Renens-CFF”** in the suburb of Lausanne, Switzerland

Urban scale of area: **2 ha**

Population in the area: **~ 2500**

Building mix in the area: **residential – apartment block (37%), administration (48%), commercial (10%), catering (3%), school (2%)**

Consumer mix in the area: **Medium consumers (residential and administration)**

Plant owner (public or private): **Swiss federal board - Private**

Specific information:

Heated floor area: **41,297 m²**

Final thermal energy demand (incl. thermal losses): **797 MWh (design value)**

Useful thermal energy demand: **713 MWh (design value)**

Network heat losses: **Estimated ~ 84 MWh/a (11%)**

Heating grid trench length: **300 m**

No. of building substations: **3**

Supply/Return temperature levels: **110/50 °C**

Energy supply technologies: **District heating combined with heat pumps (power and energy system under discussion), Solar PV (333 kW_{p,el})**

Specific information about the solar thermal part:

Solar thermal collector area: **cancelled**

Thermal energy storage: **cancelled**

Economic figures:

Overall project budget: **≈ 175 M CHF (152 M EUR) incl VAT.**

(Change rate 04.08.2017 : www.oanda.com)

4.9.1 Introduction and description

The project is composed of ten new buildings connected to an existing district heating network which is supplied by high shares (>60%) of renewable energy (mainly heat from waste incineration as well as from heat recovery) /1/. This settlement will be located in Renens in the suburb of Lausanne, along the railway. The buildings will house residential flats, administration, commercial surfaces, catering and school. The project shows a willingness to develop a sustainable project in term of

- Density and mix of population
- Architectural quality
- Promotion of alternative mobility
- Use of local resources
- Economic Viability
- Building Sustainability
- Social attractiveness

As the project is ongoing, the energy concept is currently under discussion (cooling and heat strategy, distribution and performance of envelop). Questions concerning the heat production and especially solar heat production are still discussed. As a function of the constraints the heat production changed and will probably still evolve. At the beginning of the project, there was a will to use solar thermal energy to produce domestic hot water. The planned energy system was thus to use a district heating connected to decentralized rooftop solar thermal energy system.

In Switzerland, restrictive cantonal legislation has to be applied in term of renewable fraction of energy needed, for the new or refurbished buildings. In Canton de Vaud, the new buildings have to fulfill the following constraints /2/:

- 30% of the needed energy for domestic hot water (DHW) have to be covered by renewable energy
- 20% of the needed electricity have to be covered by renewable energy
- 50% of the needed electricity for cooling and humidification have to be covered by renewable energy

For the project, it means that 20% of electricity needed in the building (without considering process consumption) has to be produced on site with PV panels. As a consequence, almost all available rooftop surfaces are used for PV panels, which clearly disadvantage solar thermal technology in this case.

4.9.2 Technical description of the concept and innovative approaches

In the initial concept, integrated rooftop solar thermal energy system was coupled to district heating to produce hot water. The concept was based on the following points:

- Heat for domestic hot water and space heating is provided by a renewable-based district heating system. More than 50% of delivered energy is provided by waste burning or energy recovery system.
- Cold is produced on site
- Solar photovoltaic panels are used to provide renewable energy to cover a part of the needs for electric consumption.

4.9.3 Decision and design process

The following questions and answers aim at understanding the context (political, urban, energy) and the pre-design steps that led to the retained solution.

General / organizational issues:

Why was this project initiated, to answer which need?

Swiss Federal board CFF owns land located next to city centers whose initial allocation does not correspond to current sustainable urban development objectives supported by the public authorities. The project objective is to develop a mixed neighborhood and create a quality living environment. The owner wants an exemplary project for sustainable development, especially in terms of energy.

Which stakeholders were involved in the project?

The Swiss board CFF is the owner of the lands and the buildings. As a federal organization, all the initial steps of the project were led in collaboration with public municipality. The project should correspond to German Sustainable Building Council label requirements (DGNB /3/).

Which resources were available before the project?

At the beginning of the project, no energy resources were available on the site. As the municipality is involved in the deployment of a heat district at the city level, it was highly suitable to connect the new neighborhood to the existing network. This district heating /1/ is considered as sustainable since more than 50% of the energy source is renewable (waste incineration).

Who (what) were drivers and who (what) were opponents (barriers) – and why?

The stakeholders agreed on the retained solution as it fulfilled all the objectives. Unfortunately, there was no objective or constrain in term of solar fraction but only in term of fraction of renewable energy. The solar energy system was thus in direct competition with renewable heat energy of the heat district and with solar PV electricity generation.

What have been the main challenges regarding decision finding?

During previous planning phase of the project, solar thermal system was foreseen as an energy source for the production of domestic hot water. The constraints on the energy system led to the choice of solar photovoltaic production to the detriment of the solar heat production.

What was finally the crucial parameter for go /no-go decision?

The available area for solar technology is one of the crucial parameter. In the case of a renewable heat district, the production of heat with solar thermal is not mandatory anymore. The priority is given to the photovoltaic panels which remain mandatory for renewable electric production.

Financing issues:*What have been the main challenges / constraints regarding financing?*

In the case of façade-integrated solar thermal collectors, the cost of the solar thermal energy system represents a net and not mandatory additional initial investment cost.

Description about the design approach applied:*Which design targets have been set and why?*

In term of legal constrains, we can list the following point:

- Thermal energy source for domestic hot water : >30% covered by renewable energy source
- Electric consumption of the building : >20% covered by renewable energy source
- Electric consumption for the cooling and humidification : >50% covered by renewable energy source

Moreover the German DGNB /3/ label is targeted for the project.

What were the decision steps to lead to the retained solution?

Initial principle for the energy system:

- Renewable heat district for heat and domestic hot water
- Solar thermal energy for domestic hot water
- Free cooling with boring hole

The heat district is renewable. The legal constraint regarding the fraction of renewable energy needed for the production of domestic hot water is thus fulfilled.

To cover the electric consumption of the building (20%) and the cooling (50%), a substantial surface of photovoltaic panel is required. As the rooftop area is limited, priority is given to PV panel as they are need to fulfilled the legal constrains. The energy concept changes during the project and the following system is currently retained:

- Renewable heat district for heat and domestic hot water
- Solar PV for electric demand (333 kW_{p,el})
- Cooling with heat pump and free cooling tower

Which tools have been used during the design phase?

In order to choose the energy concept, no specific tool was used. Decisions were taken as a function of legal constrains and initial objectives.

Nevertheless, energy flux simulations were preceded. The tools used to manage this work were:

- LESOSAI: calculation of the buildings annual consumption
- IDA-ICE: calculation on an hourly basis of the need for space heating
- Polysun : design of the system and calculation of the solar domestic hot water production
- TRNSYS: dynamic simulation of the energy system including solar production and storage.

4.9.4 Lessons learned (barriers and success factors)

The energy system planned in the project is efficient in term of use of renewable energy. Nevertheless, solar thermal panel were rejected during the planning phase. The main factors that led to this decision were:

- The legal constraints
- The limited area on rooftop
- The additional complexity and investment cost of the solar thermal system

Lessons learned:

- When the heat district is considered as renewable, the solar thermal is in competition with the network
- Solar thermal energy system can easily produce the domestic hot water. In this situation, the heat district are not needed any more during summer time:
 - o Advantages for the consumer : during summer time, the consumer is almost independent from the heat district
 - o Disadvantages for the heat district: usually, the production of heat is not depending on the season and is rather constant. The heat produced during summer time is therefore lost in the heat pipe losses.
- In Switzerland, high fraction of renewable electricity is required. Solar PV technology are thus encourage to the detriment of solar thermal system.

4.9.5 Summary

Swiss legislation is restrictive in term of use of non-renewable energy for buildings. Even if the rate is given, the type of renewable source can be chosen by the stakeholders. Most of the time, the energy sources are based on solar (PV and/or thermal), wood, heat pump or heat recovery energy systems. This case study shows an interesting example where renewable energy sources are competing against each other.

On a pre-project stage, solar thermal installations were planned to produce domestic hot water. This initial solution was finally not retained. The reason to that was on a one hand, the high renewable fraction of the heat district which was sufficient to reach the legal needed fraction of renewable, and on the other hand, the legal constraints in term of renewable electricity. To tackle this point, solar photovoltaic installations are currently retained.

As bottleneck to the installation of solar thermal we can list:

- The available area on rooftop is a limiting factor.
- When an existing district heating contains a high fraction of renewable resource, the heat coming from the district is directly competing with the solar heat.
- In order to meet legislative constraints, solar photovoltaic system was retained in the energy concept.

5 Literature References

In the following, link(s) to further project related information / publications, etc. are given for each case study described in the main text.

Chapter 4.1: Solar district heating with seasonal storage in the city of Dronninglund, DK

/1/ /	SOLARHEATDATA.EU: http://solarheatdata.eu/ , accessed on 01/2017
/2/ /	Annual financial report of Dronninglund fjernvarme 1/6 2013-31/5 2014 : http://www.drlund-fjernvarme.dk/media/2118511/2013-2014-Bestyrelsens-beretning.pdf , accessed on 01/2017
/3/ /	Dronninglund Solar thermal plant booklet: http://www.drlund-fjernvarme.dk/media/2710783/Brochure_Dronninglund_2015_booklet_ENG_web_.pdf , accessed on 01/2017
/4/ /	SUNSTORE 3 – Phase 2 Implementation (final report for funding programme EUDP), PlanEnergi 2009, https://issuu.com/planenergi.dk/docs/sunstore-3-final-report.compressed , accessed on 05/2016
/5/ /	Solvarme – Inspirationskatalog, Inspiration og erfaringer fra solvarmeanlæg i kombination med fjernvarme i Danmark by PlanEnergi for the Danish District Heating Association, Solar ERFA-group, 2017
/6/ /	Aftale af 13. november 2012 om Energiselskabernes energispareindsats, https://ens.dk/sites/ens.dk/files/EnergiKlimapolitik/aftale_energiselskabernes_indsats_af_13_november_2012.pdf , accessed on 28/02/2017

Chapter 4.2: Hybrid solar district heating in the city of Taars, DK

/1/ /	Bengt Perers, Simon Furbo, etc. Thermal performance of concentrating tracking solar collectors .DTU Report R-292.2013.
/2/ /	Aalborg CSP: http://www.aalborgcsp.com/projects/csp-plant-for-district-heating-in-thisted-denmark/ , 2016.July.
/3/ /	Janne Dragsted, Simon Furbo. Solar radiation and thermal performance of solar collectors for Denmark. DTU report.No.r-275(UK).2012.
/4/ /	Arcon Sunmark: http://arcon-sunmark.com/products
/5/ /	Perers B, Furbo S, Tian Z, et al. Tårs 10000 m2 CSP+ Flat Plate Solar Collector Plant-Cost-Performance Optimization of the Design[J]. Energy Procedia, 2016, 91: 312-316.

Chapter 4.3: Solar-assisted urban quarter “Salzburg-Lehen”, AT

/1/ /	http://www.greensolarcities.com/
/2/ /	http://www.greensolarcities.com/demoprojects/salzburg/
/3/ /	https://www.salzburg.gv.at/bauenwohnen_/Documents/wohnbauforschungsprojekt_stadt_werk_lehen_publizierbarer_endbericht_2014.pdf
/4/ /	http://www.prisma-zentrum.com/standorte/salzburg/stadtwerk/standort/

Chapter 4.4: Solar-assisted urban quarter “Freiburg-Gutleutmatten”, DE

/1/ /	http://www.freiburg.de/pb/Lde/208548.html
/2/ /	https://www.badenovawarmeplus.de/web/Erneuerbare-Energien/Sonne/Anlagen/Solarthermie-Gutleutmatten.jsp

Chapter 4.5: Solar-assisted residential area “Vallda Heberg” in Kungsbacka, SE

/1/ /	Fahlén, E., Olsson, H., Sandberg, M., Löfås, P., Kilersjö, C., Christensson, N., Jessen, P.A., 2014. Vallda Heberg - Sveriges största passivhusområde med förnybar energi. Göteborg.
----------	--

/2/	Olsson, H., Rosander, A., 2014. Evaluation of the Solar-Assisted Block Heating System in a Passive House Residential Area - A Master ' s Thesis in Sustainable Energy Systems Chalmers University of Technology.
/3/	Nielsen, C., Haegermark, M., Dalenbäck, J.O., 2014. Analysis of a Novel Solar District Heating System. Eurosun 2014 16–19. doi:urn:nbn:se:du-15517
/4/	http://www.buildup.eu/en/practices/cases/vallda-heberg-swedish-certified-passive-house-residential-area
/5/	https://www.ncc.se/vara-projekt/vallda-heberg-kungsbacka (Swedish only)

Chapter 4.6: Solar assisted apartment blocks “La Cigale” in Geneva, CH

/1/	For further information on the “La Cigale” IceSol system visit: http://task44.iea-shc.org/
/2/	Tornare G., Elio R, Barras G., and al., « Rapport technique et de communication du projet d’assainissement Minergie-P des immeubles « La Cigale » (GE) – Chauffage par pompes à chaleur solaires couplées à des stocks à changement de phase », Rapport final – DRAFT, OFEN, December 2016, Bern
/3/	Thissen B., « La Cigale – Projet de rénovation : Chauffage par pompe à chaleur solaires couplées à des stocks à changement de phase – retour d’expérience », ER’17 Symposium, March 2017, Yverdon

Chapter 4.7: Solar-assisted mountain holiday resort “Reka Feriendorf” in Naters, CH

/1/	Sulzer M., Summermatter S.: «Solare Energieversorgung im alpinen Raum - Reka-Feriendorf Blatten-Belalp», Schlussbericht, December 2015, BFE, Bern
-----	---

Chapter 4.8: Solar-assisted urban quarter “Buchsee-Köniz” in Berne, CH

/1/	http://www.energiestadt.ch/
/2/	Entwurfsplanung Solarunterstützung "Buchsee-Quartier Köniz", 06.10.2015, BKW, author: S.O.L.I.D

Chapter 4.9: Solar-assisted urban quarter “Renens-CFF” in the suburb of Lausanne; CH

/1/	http://cadouest.ch
/2/	Loi sur l'énergie (LVLEne) 730.01, 16 mai 2006
/3/	http://www.dgnb-system.de/en/